

*The journey becomes easy
when your co-traveler
is an expert.*

Americas



Agriculture & Forestry



Doing business is a journey.
Sometimes you just cruise on, sometimes the going gets tough. When it does, you need an expert.

An expert who helps you rise above obstacles and take your business to newer heights.


Presenting Ascenso off-highway tires.

Designed keeping in mind absolutely everything: vehicle types, terrain, weather conditions and category needs. Our expertise comes from our vast experience in the tire business.

We have a total experience of about three decades in the off-highway tire business. Ascenso is our third off-highway tire venture, after having launched two successful off-highway tire brands in the past.

Let's begin our journey together. Welcome aboard!

**The word 'We' refers to the Mahansaria family.*



Never stop learning.
Never stop improving.
Never stop growing.
Never stop rising!

Our Brand Beliefs

- Customer first
- Long term partnership
- Competitive and world class
- High on value products
- Wide and growing range
- Tires for specific application
- Consistent quality



Our Core Values

Ownership

Respect

Agility

Never give up

Go getter, go together

Empathetic

A. Patterns, Markings and Definitions

Tire Size Markings	08
Load Index and Speed Symbols	11
Tire Sidewall Marking and Structures	12
Product Nomenclature	13
Abbreviation	14

B. Agriculture

Tractor

TRACTOR STEER BIAS

TSB 110	17
TSB 111	18
TSB 112	19
BOSS TS 10	20

TRACTOR DRIVE BIAS

TDB 120	21
TDB 121	24
TDB 123	25
TDB 124	26
TDB 125	27
BOSS TD 15	28
BOSS TD 16	29

TRACTOR DRIVE RADIAL

XLR 880	30
TDR 650	31
TDR 700	32
TDR 800	33
TDR 850	34
VDR 2000	36

COMPACT DRIVE RADIAL

CDR 700	38
---------------	----

TRACTOR DRIVE RADIAL

TDR 900	39
VDR 900	40
VDR 901	41

MULTI DRIVE RADIAL

MDR 1000	42
----------------	----

Harvester

BIAS	
HRB 210	45
RADIAL	
HRR 200	46

Implement

BIAS	
IMB 160	48
IMB 161	49
IMB 162	50
IMB 163	51
IMB 164	52
IMB 165	53
IMB 166	54
IMB 168	55
BOSS TR 20	56
BOSS TR 21	57
BOSS TR 22	58
RADIAL	
IMR 140	59
VIR 2500	60
SPR 250	61

Flotation

BIAS	
FTB 190	63
RADIAL	
FCR 185	64
FTR 170	65
FTR 176	66

Irrigation

BIAS	
IRB 260	68

Multi-Purpose

BIAS	
SPB 260	70
RADIAL	
MPR 390	71

Lawn & Garden

RADIAL	
UTR 240	73

C. Forestry

Agro Forestry

BIAS	
AFB 821	76

Log Skidder


BIAS	
LSB 780	78

Forestry Forwarder

BIAS	
FFB 840	80
FFB 841	81
FFB 843	82

D. Tire Care and Usage Manual

Tire Description	84
Conversion Table	85
Tire Care and Maintenance	86
Fitting and Removal Instructions	87
Parameter For Extending Tire Life	89
Rim and Wheel Discs	91
SKU/ EAN Code	93
Warranty	109

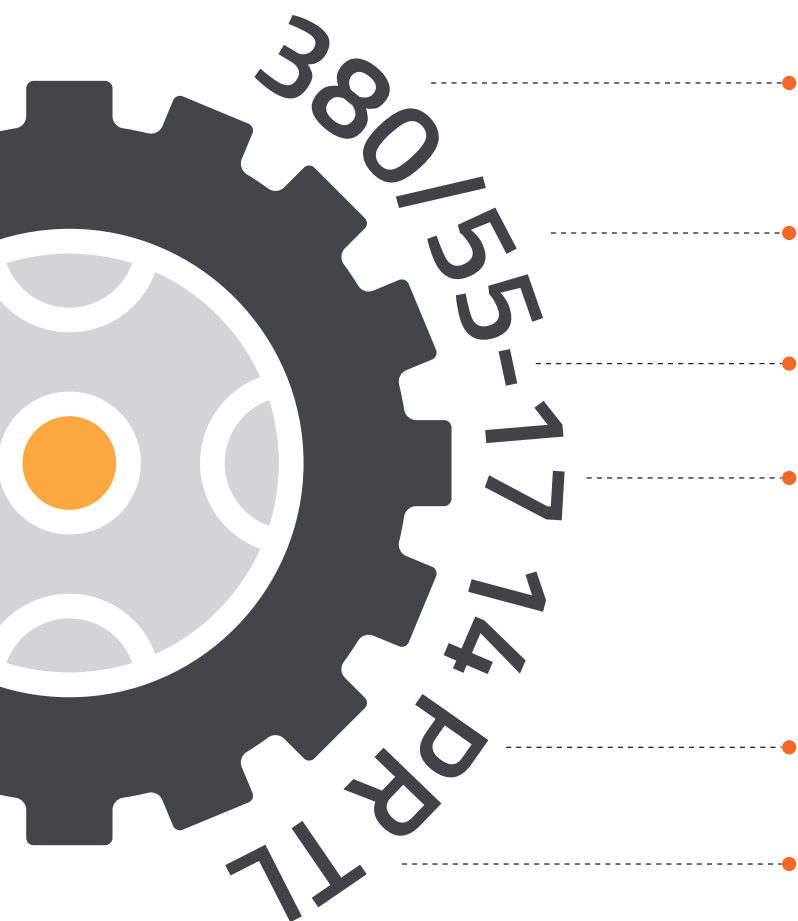

Nominal Section Width
(in mm)


Aspect Ratio (SH/SW) in %

Type Construction (Bias)

Nominal Rim Diameter
(in inches)

Ply Rating

Tubeless

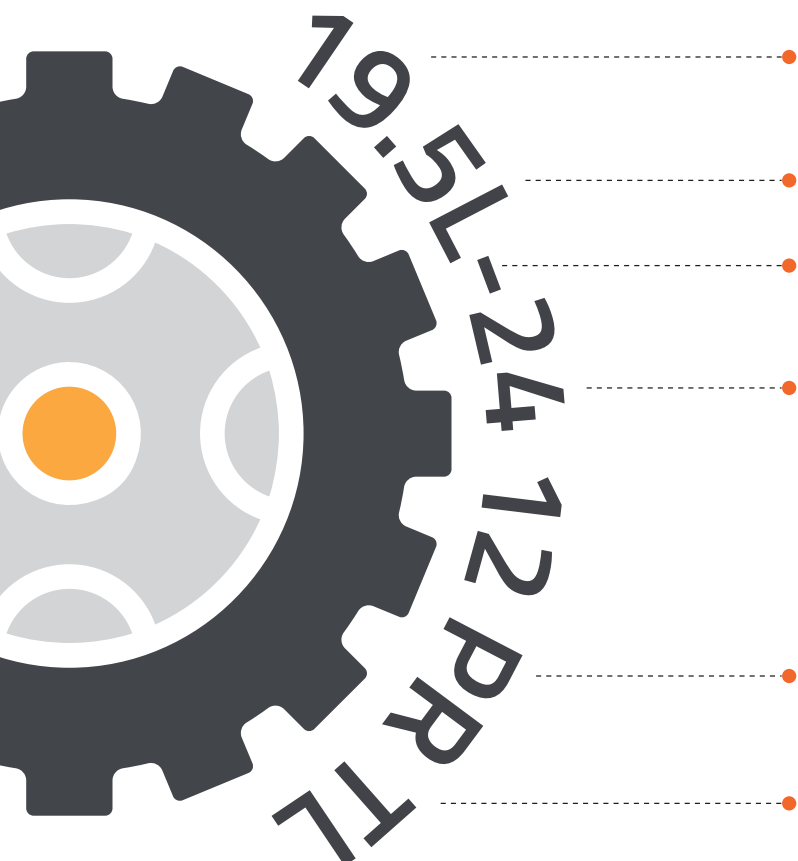

Nominal Section Width
(in inches)


Reduced Aspect Ratio

Type Construction (Bias)

Nominal Rim Diameter
(in inches)

Ply Rating

Tubeless

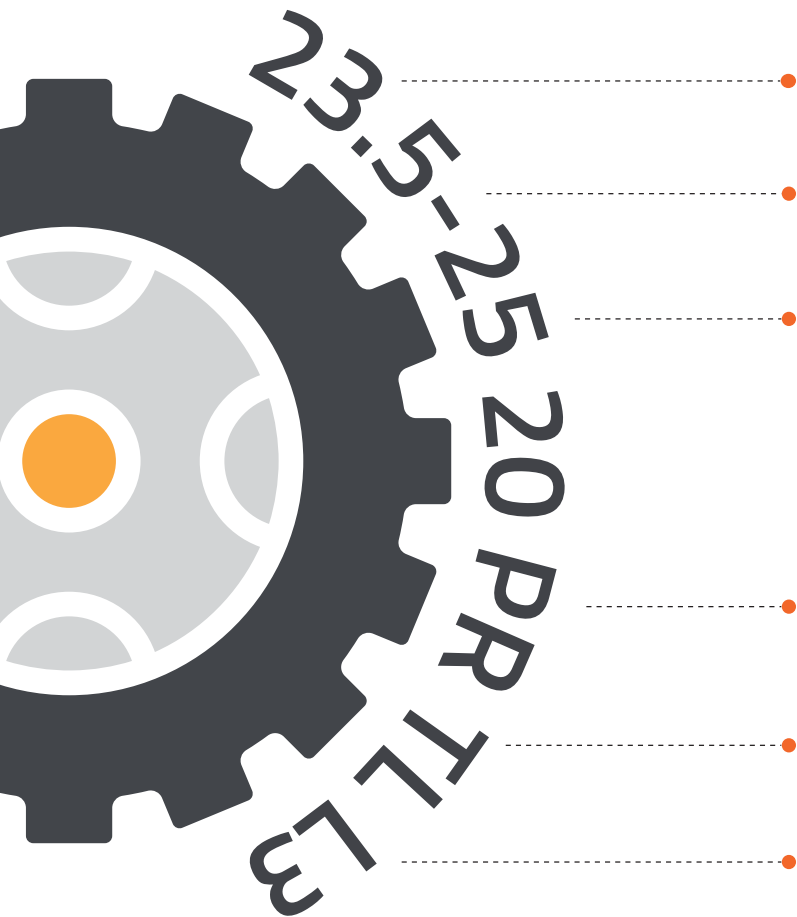

Nominal Section Width
(in inches)


Type Construction (Bias)

Nominal Rim Diameter
(in inches)

Ply Rating

Tubeless

T&RA Code

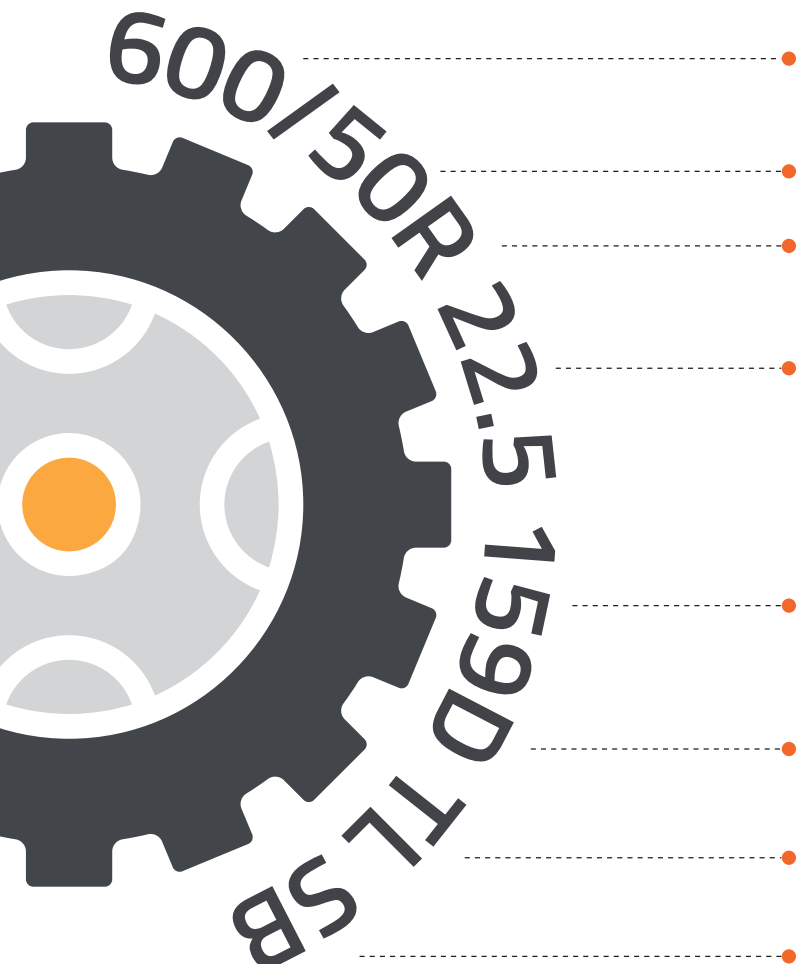

Nominal Section Width
(in mm)

Aspect Ratio (SH/SW) in %

Type Construction (Radial)

Nominal Rim Diameter
(in inches)

Load Index

Speed Rating

Tubeless

Steel Belted



Overall diameter
(in inches)

Nominal section width
(in inches)

Cross-ply construction

Nominal Rim Diameter
(in inches)


4. Load Index and Speed Symbols

According to ETRTO (The European Tire and Rim Technical Organization), as well as to ECE (Economic Commission for Europe-UN Institution Geneva), the maximum load capacity, as well as the maximum speed are indicated by load index and speed symbol.

The following table shows the meaning of each speed symbol and the load in kg/lbs corresponding to each load index.

Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Speed Symbol	Kmph / mph
50	190/419	90	600/1323	130	1900 / 4189	170	6000 / 13228	A1	5 / 3
51	195/430	91	615/1356	131	1950 / 4299	171	6150 / 13558	A2	10 / 6
52	200/441	92	630/1389	132	2000 / 4409	172	6300 / 13889	A3	15 / 9
53	206/454	93	650/1433	133	2060 / 4541	173	6500 / 14330	A4	20 / 12
54	212/467	94	670/1477	134	2120 / 4670	174	6700 / 14771	A5	25 / 16
55	218/481	95	690/1521	135	2180 / 4806	175	6900 / 15212	A6	30 / 19
56	224/494	96	710/1566	136	2240 / 4938	176	7100 / 15653	A7	35 / 22
57	230/507	97	730/1610	137	2300 / 5071	177	7300 / 16093	A8	40 / 25
58	236/520	98	750/1654	138	2360 / 5203	178	7500 / 16534	B	50 / 31
59	243/536	99	775/1709	139	2430 / 5357	179	7750 / 17086	C	60 / 37
60	250/551	100	800/1765	140	2500 / 5511	180	8000 / 17637	D	65 / 40
61	257/567	101	805/1820	141	2575 / 5677	181	8250 / 18188	E	70 / 44
62	265/584	102	850 / 1874	142	2650 / 5842	182	8500 / 18739	F	80 / 50
63	272/600	103	875 / 1929	143	2725 / 6007	183	8750 / 19290	G	90 / 56
64	280/617	104	900 / 1984	144	2800 / 6173	184	9000 / 19841	J	100 / 62
65	290/639	105	925 / 2039	145	2900 / 6393	185	9250 / 20392	K	110 / 68
66	300/662	106	950 / 2094	146	3000 / 6614	186	9500 / 20944	L	120 / 75
67	307/667	107	975 / 2149	147	3075 / 6779	187	9750 / 21495	M	130 / 81
68	315/695	108	1000 / 2205	148	3150 / 6944	188	10000 / 22046	N	140 / 87
69	325/717	109	1030 / 2271	149	3250 / 7165	189	10300 / 22707	P	150 / 93
70	335/739	110	1060 / 2337	150	3350 / 7385	190	10600 / 23369	Q	160 / 99
71	345/761	111	1090 / 2403	151	3450 / 7606	191	10900 / 24030	R	170 / 106
72	355/783	112	1120 / 2469	152	3550 / 7826	192	11200 / 24691	S	180 / 112
73	365/805	113	1150 / 2535	153	3650 / 8047	193	11500 / 25353		
74	375/827	114	1180 / 2601	154	3750 / 8267	194	11800 / 26014		
75	387/853	115	1215 / 2679	155	3875 / 8543	195	12150 / 26786		
76	400/882	116	1250 / 2756	156	4000 / 8818	196	12500 / 27557		
77	412/908	117	1285 / 2833	157	4000 / 8818	197	12850 / 28329		
78	425/937	118	1320 / 2910	158	4250 / 9369	198	13200 / 29101		
79	437/964	119	1360 / 2998	159	4375 / 9645	199	13600 / 29982		
80	450/992	120	1400 / 3086	160	4500 / 9921	200	14000 / 30864		
81	462/1019	121	1450 / 3197	161	4625 / 10196	201	14500 / 31966		
82	475/1047	122	1500 / 3307	162	4750 / 10472	202	15000 / 33069		
83	487/1074	123	1550 / 3417	163	4875 / 10747	203	15500 / 34171		
84	500/1103	124	1600 / 3527	164	5000 / 11023	204	16000 / 35273		
85	515/1136	125	1650 / 3638	165	5150 / 11354	205	16500 / 36376		
86	530/1169	126	1700 / 3748	166	5300 / 11684	206	17000 / 37478		
87	545/1202	127	1750 / 3858	167	5450 / 12015	207	17500 / 38580		
88	560/1235	128	1800 / 3968	168	5600 / 12346	208	18000 / 39683		
89	580/1279	129	1850 / 4078	169	5800 / 12787	209	18500 / 40790		

5. Tire Sidewall Markings

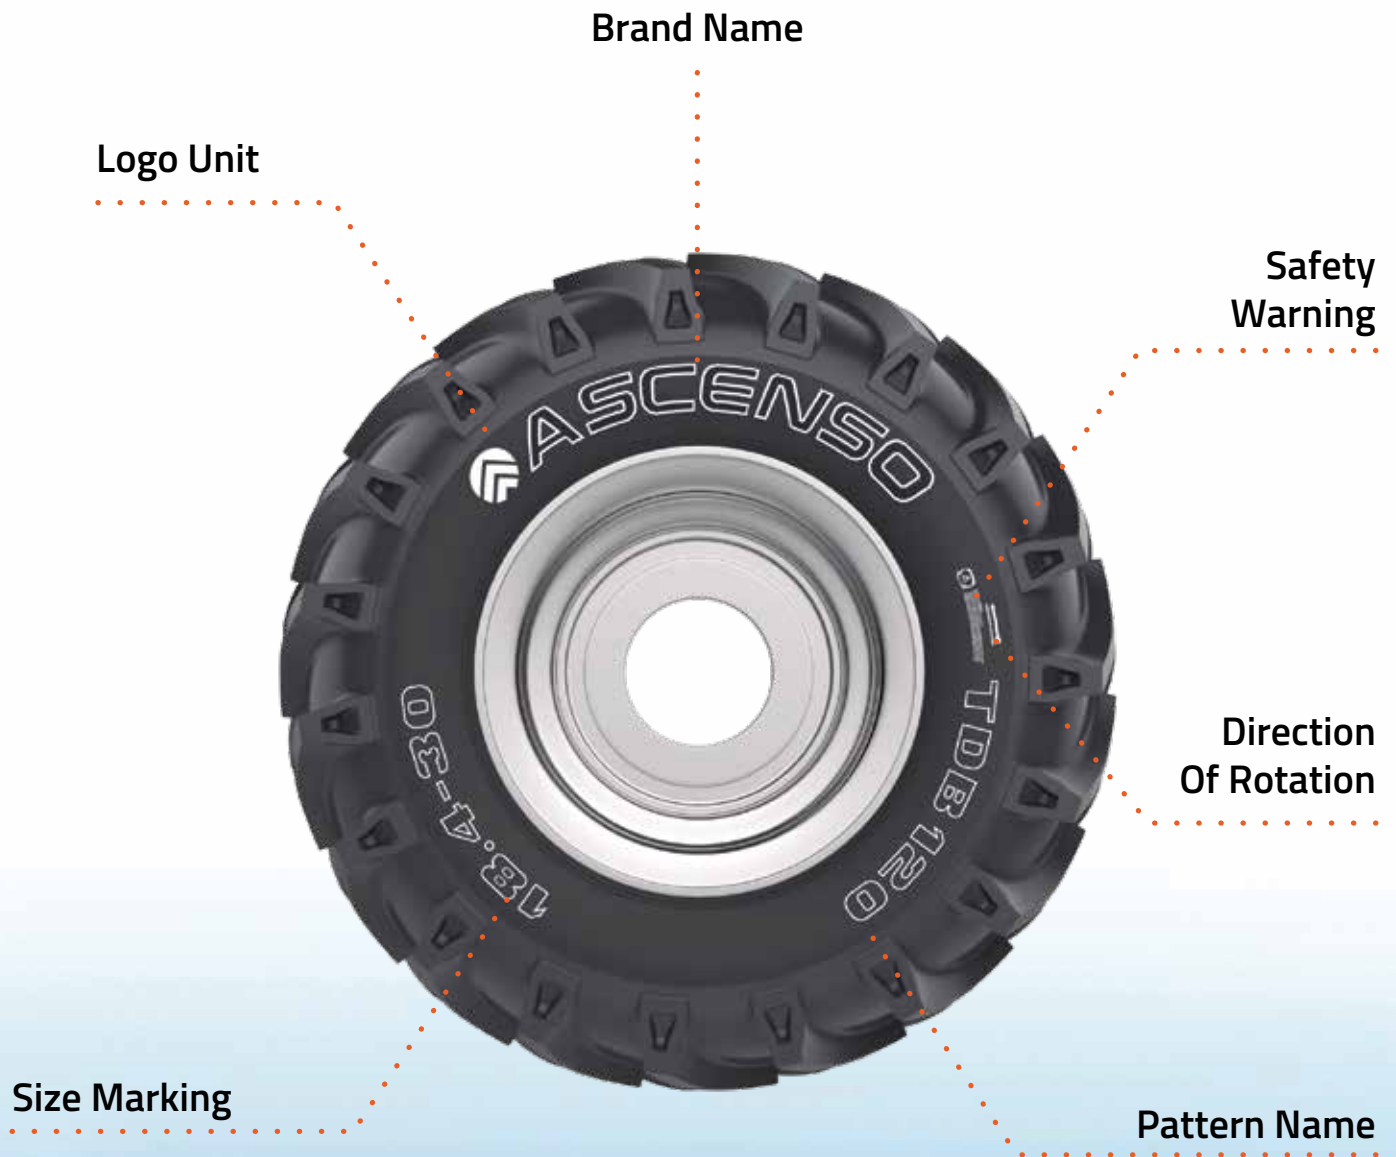

6. Product Nomenclature



Application	Category	Cat Code	Radial/ Bias	Design Number	Product Name
Agriculture	TRACTOR STEER	TS	B	110	TSB 110
	TRACTOR STEER	TS	B	111	TSB 111
	TRACTOR STEER	TS	B	112	TSB 112
	TRACTOR STEER	BOSS TS	B	10	BOSS TS 10
	TRACTOR DRIVE	TD	B	120	TDB 120
	TRACTOR DRIVE	TD	B	121	TDB 121
	TRACTOR DRIVE	TD	B	123	TDB 123
	TRACTOR DRIVE	TD	B	124	TDB 124
	TRACTOR DRIVE	BOSS TD	B	15	BOSS TD 15
	TRACTOR DRIVE	BOSS TD	B	16	BOSS TD 16
	TRACTOR DRIVE	TD	R	850	TDR 850
	TRACTOR DRIVE	TD	R	700	TDR 700
	TRACTOR DRIVE	TD	R	800	TDR 800
	TRACTOR DRIVE	TD	R	650	TDR 650
	TRACTOR DRIVE	XL	R	880	XLR 880
	TRACTOR DRIVE	VD	R	2000	VDR 2000
	COMPACT DRIVE	CD	R	700	CDR 700
	ROW CROP	TD	R	900	TDR 900
	ROW CROP	VD	R	900	VDR 900
	ROW CROP	VD	R	901	VDR 901
	MULTI DRIVE	MD	R	1000	MDR 1000
	HARVESTER	HR	B	210	HRB 210
	HARVESTER	HR	R	200	HRR 200
	IMPLEMENT	IM	B	160	IMB 160
	IMPLEMENT	IM	B	161	IMB 161
	IMPLEMENT	IM	B	162	IMB 162
	IMPLEMENT	IM	B	163	IMB 163
	IMPLEMENT	IM	B	164	IMB 164
	IMPLEMENT	IM	B	165	IMB 165
	IMPLEMENT	IM	B	166	IMB 166
	IMPLEMENT	BOSS TR	B	20	BOSS TR 20
	IMPLEMENT	BOSS TR	B	21	BOSS TR 21
	IMPLEMENT	IM	R	140	IMR 140
	IMPLEMENT	VI	R	2500	VIR 2500
	IMPLEMENT	SP	R	250	SPR 250
	FLOTATION	FT	B	190	FTB 190
	FLOTATION	FC	R	185	FCR 185
	FLOTATION	FT	R	170	FTR 170
	IRRIGATION	IR	B	260	IRB 260
	TELEHANDLER	TH	B	230	THB 230
	TELEHANDLER	TH	B	230 HD	THB 230 HD
	MULTI PURPOSE	SP	B	260	SPB 260
MULTI PURPOSE	MP	R	390	MPR 390	
UTILITY TRACTOR	UT	R	240	UTR 240	
Forestry	AGRO FORESTRY	AF	B	821	AFB 821
	LOG SKIDDER	LS	B	780	LSB 780
	FORESTRY FORWARDER	FF	B	840	FFB 840

7. Abbreviation

SR No.	Abbreviation	Fullform
1	(SH/SW)	(Section Height/Section Width)
2	PR	Ply rating
3	TRA	Tire and Rim association
4	VF	Very-High Flexion
5	HD	Heavy Duty
6	SB	Steel Belted
7	SG	Stubble Guard
8	SL	Standard Load
9	DB	Dual Bead
10	CR	Cut Resistant
11	kg / lbs	kilogram/ Pound
12	kmph	kilometre per hour
13	mph	miles per hour
14	LI/SI	Load Index/Speed Index
15	2WD	2-wheel drive
16	4WD	4-wheel drive
17	OD	Overall Diameter
18	Psi	Pound per square inch
19	SLR	Static loaded Radius
20	FR	Free Rolling
21	DW	Drive Wheel
22	kPa	kilo Pascal
23	RC	Rolling Circumference
24	Cat Code	Category Code
25	TT	Tube Type
26	TL	Tube Less
27	Rec.	Recommended
28	Alt.	Alternate
29	V	Value Plus

● Agriculture



● Tractor





Wider Centre Rib:

- Ease in steering and prevents damage to the grassland.

High Strength Nylon Carcass:

- Provides stability to the machine and ensures durability.

Special Tread Compound:

- Provides longer tire life.
- Resistance to puncture.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
5.00-15	-	76A8	6	TT	14	4.00E	14	26	5	78	12	880	60	25
5.50-16	-	82A8	6	TT	19	4.00E	18	28	6	84	13	1050	56	25
6.00-16	-	85A8	6	TT	22	4.50E	20	29	6	87	13	1130	52	25
6.00-16	-	91A8	8	TT	22	4.50E	20	29	6	87	13	1350	68	25
6.50-16	-	88A8	6	TT	23	4.50E	24	30	7	90	14	1230	48	25
7.50-16	-	99A8	8	TT	26	5.50F	34	32	8	95	15	1710	56	25
7.50-16	-	104A8	10	TT	26	5.50F	35	32	8	95	15	1980	69	25
9.00-16	-	111A8	10	TT	30	6.00F	49	34	9	101	15	2400	60	25
10.00-16	-	115A8	10	TT	34	W8L	55	35	11	105	16	2680	49	25
11.00-16	-	118A8	10	TT	37	W10L	70	38	12	114	17	2910	48	25
7.50-18	-	102A8	8	TT	26	5.50F	35	34	8	101	16	1870	56	25
4.00-19	-	69A8	6	TT	14	3.00D	13	28	4	84	13	720	52	25
6.00-19	-	89A8	6	TT	20	4.50E	22	32	6	96	15	1280	52	25
7.50-20	-	105A8	8	TT	26	5.50F	40	36	8	107	17	2040	56	25



Unique Dumbbell Pattern:

- Reduces block tearing and shoulder block deformation.

Strong Nylon Carcass:

- Provides stability to the machine and ensures durability.

Special Tread Compound:

- Ensures longer tire life.
- Resistance to puncture.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
4.50-16	-	74A8	6	TT	13	3.00D	12	26	5	77	12	830	65	25
5.00-16	-	76A8	6	TT	15	4.00E	14	27	6	80	13	880	61	25
5.50-16	-	82A8	6	TT	17	4.00E	17	28	6	84	13	1050	56	25
6.00-16	-	91A8	8	TT	18	4.50E	25	29	6	87	13	1350	65	25
6.00-16 (HD)	-	91A8	8	TT	22	4.50E	25	29	6	87	13	1350	65	25
6.50-16	-	94A8	8	TT	22	4.50E	28	30	7	90	14	1480	61	25
6.50-16 (HD)	-	94A8	8	TT	22	4.50E	30	30	7	90	14	1480	61	25
7.50-16	-	99A8	8	TT	26	5.50F	36	32	8	95	15	1710	56	25
7.50-16 (HD)	-	99A8	8	TT	26	5.50F	37	32	8	95	15	1710	56	25
7.50-16	-	119A8	14	TT	26	5.50F	40	32	8	95	15	3000	80	25
7.50-18	-	102A8	8	TT	26	5.50F	38	34	8	101	16	1870	56	25
6.00-19	-	91A8	8	TT	18	4.50E	23	32	7	96	15	1350	56	25
6.50-20	-	93A8	8	TT	22	4.50F	36	34	7	102	16	1650	56	25
7.50-20	-	105A8	8	TT	26	5.50F	44	36	8	107	17	2040	56	25



Wider Ribs:

- Provides ease in steering.
- Better maneuvering.

High Strength Nylon Carcass:

- Provides longer tire life.
- Trouble-free service.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
9.5L-15 SL	-	102A8	8	TL	22	7.00	40	31	10	92	14	1870	48	25
11L-15 SL	-	106A8	8	TL	26	8LB	49	32	11	96	15	2090	44	25
10.00-16 SL	-	110A8	8	TL	26	8LB	55	35	11	105	16	2330	44	25
11.00-16 SL	-	114A8	8	TL	30	10LB	71	38	12	114	17	2600	41	25
11.00-16 SL	-	123A8	12	TL	30	10LB	79	38	12	114	17	3410	60	25



Specially-designed CCR Compound:

- Puncture and cut resistance.
- Extra mileage.

Wider Centre Rib:

- Optimum road contact for better steering control.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
6.00-16	-	94A6	8	TT	24	4.50E	28	29	7	86	13	1470	65	19
6.50-16	-	98A6	8	TT	30	4.50E	35	30	7	90	14	1650	61	19
7.50-16	-	103A6	8	TT	28	5.50F	38	32	8	95	15	1930	54	19



Wider Lugs:

- Easy to penetrate the soil, generate optimum traction and ensure comfortable ride.

Sturdy Sidewall Structure:

- Provides resistance to external damage.

Strong Nylon Carcass:

- Safeguards the tire against failures.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
6.50-16	-	94A8	8	TT	20	4E	22	30	7	90	14	1480	64	25
8-16	-	88A8	6	TT	35	6LB	32	31	8	93	14	1230	28	25
9.5-16	-	98 A8	8	TL	42	8	50	33	9	100	15	1650	41	25
8-18	-	109A8	12	TT	35	6F	44	33	8	99	15	2270	57	25
8.00-18 HD	-	116A8	12	TT	35	6F	44	33	8	99	15	2750	68	25
8.3-20	-	92A8	6	TT	35	W6	40	35	8	105	16	1390	35	25
9.5-20	-	99A8	6	TT	35	W7	46	37	9	111	17	1710	30	25
11.2-20	-	107A8	8	TT	42	W10	65	39	11	118	18	2150	35	25
11.2-20 (SB, SG)	-	107A8	8	TT	42	W10	93	39	11	118	18	2150	35	25
8.3-24	-	105A8	8	TT	35	W7	44	39	8	117	18	2040	45	25
8.3-24	-	105A8	8	TL	35	W7	45	39	8	117	18	2040	45	25
9.5-24	-	112A8	8	TT	39	W8	57	41	9	123	19	2470	41	25
9.5-24	-	112A8	8	TL	39	W8	59	41	9	123	19	2470	41	25
9.5-24	-	116A8	12	TT	39	W8	63	41	10	123	19	2760	59	25
11.2-24	-	116A8	8	TT	42	W10	70	43	11	130	20	2750	36	25
11.2-24	-	116A8	8	TL	42	W10	77	43	11	130	20	2750	36	25
11.2-24	-	124A8	12	TT	42	W10	79	43	11	130	20	3520	52	25
12.4-24	-	121A8	8	TT	43	W11	86	46	12	136	21	3190	32	25
12.4-24	-	121A8	8	TL	43	W11	89	46	12	136	21	3190	32	25
12.4-24	-	128A8	12	TT	43	W11	96	46	12	136	21	3960	49	25
13.6-24	-	123A8	8	TT	45	W12	103	48	14	142	22	3410	28	25
13.6-24	-	123A8	8	TL	45	W12	106	48	14	142	22	3410	28	25
13.6-24	-	130A8	12	TT	45	W12	114	48	14	142	22	4190	42	25
14.9-24	-	128A8	8	TT	43	W13	119	50	15	149	23	3960	26	25
14.9-24	-	128A8	8	TL	43	W13	123	50	15	149	23	3960	26	25
14.9-24	-	136A8	12	TT	43	W13	139	50	15	149	23	4930	38	25
16.9-24	-	133A8	8	TT	47	W15L	148	52	17	157	24	4540	24	25
16.9-24	-	133A8	8	TL	47	W15L	156	52	17	157	24	4540	24	25
16.9-24	-	143A8	12	TT	47	W15L	167	52	17	157	24	6000	35	25
14.9-26	-	129A8	10	TT	45	W12	140	52	15	155	24	4070	32	25
14.9-26	-	134A8	12	TT	46	W12	143	52	15	155	24	4670	39	25
16.9-26	-	133A8	10	TT	48	W15L	166	54	17	163	25	4540	28	25

TDB 120 - [R-1] [TT/TL]



Tractor



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
11.2-28	-	118A8	8	TT	42	W10	80	47	11	142	22	2910	36	25
11.2-28	-	118A8	8	TL	42	W10	84	47	11	142	22	2910	36	25
12.4-28	-	123A8	8	TT	43	W11L	98	50	12	148	23	3410	32	25
12.4-28	-	123A8	8	TL	43	W11L	103	50	12	148	23	3410	32	25
12.4-28	-	131A8	12	TT	43	W11L	110	50	12	148	23	4300	51	25
13.6-28	-	125A8	8	TT	45	W12	114	52	14	154	24	3630	28	25
13.6-28	-	125A8	8	TL	45	W12	117	52	14	154	24	3630	28	25
14.9-28	-	130A8	8	TT	47	W13	132	54	15	161	25	4190	26	25
14.9-28	-	130A8	8	TL	47	W13	141	54	15	161	25	4190	26	25
14.9-28	-	137A8	12	TT	47	W13	148	54	15	161	25	5070	38	25
16.9-28	-	135A8	8	TT	47	W15L	160	56	17	169	26	4800	24	25
16.9-28	-	135A8	8	TL	47	W15L	166	56	17	169	26	4800	24	25
16.9-28	-	143A8	12	TT	47	W15L	172	56	17	169	26	6000	35	25
7.2-30	-	96A8	6	TT	35	W6	46	43	7	129	20	1560	41	25
9.5-30	-	111A8	6	TT	39	W7	69	47	10	141	22	2400	41	25
14.9-30	-	127A8	8	TT	45	W13	140	56	15	167	26	3850	26	25
16.9-30	-	137A8	8	TT	47	W15L	171	58	17	175	27	5070	24	25
16.9-30	-	137A8	8	TL	47	W15L	177	58	17	175	27	5070	24	25
16.9-30	-	144A8	12	TT	47	W15L	187	58	17	175	27	6170	36	25
16.9-30	-	146A8	14	TT	47	W15L	190	58	17	175	27	6610	41	25
18.4-30	-	139A8	8	TT	48	W16L	188	61	18	183	28	5350	20	25
18.4-30	-	139A8	8	TL	48	W16L	205	61	18	183	28	5350	20	25
18.4-30	-	152A8	14	TT	48	W16L	228	61	18	183	28	7820	39	25
18.4-30	-	154A8	16	TT	48	W16L	235	61	18	183	28	8260	42	25
8.3-32	-	107A8	8	TT	39	W7	57	47	8	141	22	2150	46	25
8.3-32 (HD)	-	107A8	8	TT	35	W7	64	47	8	141	22	2150	46	25
9.5-32	-	106A8	6	TT	39	W7	72	49	10	147	23	2090	30	25
12.4-32	-	125A8	8	TT	43	W11L	107	54	12	160	25	3630	32	25
16.9-34	-	139A8	8	TT	47	W15L	191	63	17	187	29	5350	24	25
16.9-34	-	139A8	8	TL	47	W15L	201	63	17	187	29	5350	24	25
16.9-34	-	144 A8	12	TL	47	W15L	207	63	17	187	29	6170	33	25
16.9-34	-	149 A8	14	TT	47	W15L	197	63	17	187	29	7160	41	25
18.4-34	-	142A8	8	TT	48	W16L	216	65	18	195	30	5840	20	25
18.4-34	-	142A8	8	TL	48	W16L	226	65	18	195	30	5840	20	25
18.4-34	-	153A8	14	TT	48	W16L	228	65	18	195	30	8040	36	25
12.4-36	-	126A8	8	TT	43	W11L	117	58	12	172	27	3740	32	25
12.4-36	-	139A8	14	TT	43	W11L	138	58	12	172	27	5350	59	25
13.6-36	-	129A8	8	TT	45	W12	141	60	14	178	28	4070	28	25
13.6-36	-	138A8	12	TT	45	W12	157	60	14	178	28	5200	46	25
13.6-36	-	142A8	14	TT	46	W12	164	60	14	178	28	5850	51	25
13.6-38	-	131A8	8	TT	45	W12	148	62	14	184	29	4300	29	25
13.6-38	-	131A8	8	TL	45	W12	153	62	14	184	29	4300	29	25

Note: SB- Steel Belted, SG- Stubble Guard

TDB 120 - [R-1] [TT]



Tractor



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
13.6-38	-	136A8	10	TT	45	W12	163	62	14	184	29	4930	36	25
13.6-38	-	138A8	14	TT	46	W12	169	62	14	184	29	5200	51	25
15.5-38	-	133A8	8	TT	42	W14L	165	62	16	185	29	4540	26	19
15.5-38	-	133A8	8	TL	42	W14L	179	62	16	185	29	4540	26	19
15.5-38	-	138A6	10	TT	42	W14L	171	62	16	186	29	5200	33	19
15.5-38	-	141A6	12	TT	42	W14L	180	62	16	186	29	5670	41	19
16.9-38	-	141A8	8	TT	47	W15L	207	66	17	199	31	5670	24	25
16.9-38	-	141A8	8	TL	48	W15L	219	66	17	199	31	5670	24	25
16.9-38	-	151A8	14	TT	47	W15L	222	66	17	199	31	7600	38	25
18.4-38	-	143A8	8	TT	48	W16L	241	69	18	207	32	6000	20	25
18.4-38	-	143A8	8	TL	48	W16L	259	69	18	207	32	6000	20	25
18.4-38		151A8	14	TT	48	W16L	261	69	18	207	32	8540	38	25

Note: SB- Steel Belted, SG- Stubble Guard

TDB 121 - [R-1W+] [TL/TT] (Deep Tread)



Tractor



- Optimized lug distribution to support excellent traction and self-cleaning for puddling operation.
- Better inner volume to give higher traction in wet & moist soil conditions.
- Good lateral traction gives operational stability.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
5-12	-	64A6/60A8	6	TT	34	4JA	15	21	5	62	10	620	51	19
6-12	-	71A6/67A8	6	TT	34	5JA	19	23	6	68	10	760	38	19
6-14	-	66A6/63A8	4	TL	34	5JA	21	25	6	74	11	660	28	19
9.5-18	-	105A6/101A8	8	TT	57	W8	60	35	10	106	16	2040	44	19
8.3-20	-	101A6/98A8	8	TT	56	W7	50	35	8	105	16	1820	46	19
9.5-20	-	107A6/103A8	8	TT	57	W8	63	38	10	112	17	2150	41	19
9.5-24	-	111A6/108A8	8	TT	56	W8	74	41	9	124	19	2400	41	19
12.4-24	-	120A6/117A8	8	TT	65	W11	111	46	12	137	21	3080	33	19
12.4-28	-	131A6/127A8	12	TT	65	W11	129	50	12	148	23	4290	51	19
13.6-28	-	134A6/130A8	12	TT	68	W12	156	52	14	154	24	4660	44	19
14.9-28	-	137A6/133A8	12	TT	71	W13	176	54	15	161	25	5060	38	19
16.9-28	-	143A6/139A8	12	TT	73	W15L	216	57	17	170	26	6000	35	19
13.6-26	-	126A6/123A8	8	TT	68	W12	140	50	14	148	23	3740	32	19



Unique 23° Lug Design:

- Excellent ground contact.
- Unbeatable traction.

Strong Nylon Carcass:

- Safeguards the tire against failures.

Special Tread Compound:

- Ensures longer tire life.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
23.1-26	-	153A8	12	TL	54	DW20B	304	63	23	189	28	8040	25	25
23.1-26	-	159A8	16	TL	54	DW20B	320	63	23	189	28	9640	33	25
20.8-38	-	148A8	8	TT	53	W18A	322	72	21	216	33	6940	19	25
20.8-38	-	159A8	14	TL	53	W18A	379	72	21	216	33	9640	33	25
20.8-38		159A8	14	TT	53	W18A	347	72	21	216	33	9640	33	25



Specially Designed to Maximize the Load Capacity:

- Ensure self-cleaning.
- Extensive footprint area for uniform load distribution.
- Better lateral stability on the field.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
24.5-32	-	159A6	12	TL	53	DW21B	440	71	24	212	32	9640	25	19



Optimized Tread Design with Extra Deep Tread:

- Excellent traction in flooded soil muddy, sticky soil conditions.
- Longer Tire Life.

Centre Tie Bar

- Minimizes lug shuffling in operation.
- Strong Lug Base.

Optimized Lug Spacing (Void ratio):

- Good lateral Traction
- Superior grip
- Outstanding self-cleaning properties due to exclusive tread geometry

High Inner Volumes:

- Ideal for wet & moist soil conditions

Superior Tread Compound:

- Minimizes wear/tear in operations.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
12.4-24	-	117 A8 / 121 A6	8	TT	83	W11	113	47	12	140	21	2830	32	25
13.6-24	-	120 A8 / 123 A6	8	TT	88	W11	133	49	14	147	22	3080	28	25



Unique Mud Breaker:

- Excellent self-cleaning properties during field operation.

Dual-angle Lug Design:

- Provides unbeatable traction.

High Non-skid Depth:

- Best-in-class mileage.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
12.4-28	-	125A6	12	TT	48	W11	121	50	12	148	23	3630	36	19
13.6-28	-	128A6	12	TT	49	W12	147	52	14	154	24	3960	33	19
14.9-28	-	134A6	12	TT	49	W13	163	54	15	161	25	4670	33	19
16.9-28	-	143A6	12	TT	53	W15L	207	57	17	169	26	6000	35	19
*18.4-30	-	152A8	14	TT	52	W16L	261	61	18	183	28	7820	39	25

Note: Star marked size is also for Harvester Machinery.



Deep Tread Depth with high inner volume:

- Excellent Traction.
- Excellent Self-Cleaning Properties.

Center Tie bar with Strong Lug Base:

- Minimizes lug shuffling in operation.

Superior Nylon Construction:

- High load carrying capacity.

Deep Tread:

- Enhanced Performance in both Field and Haulage.
- Improved Mileage.

CCR (Cut & Chip Resistance) Compound:

- Resistance to Cut & Chip & also minimizes Puncture.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
9.5-24	-	114 A6	12	TT	49	W8	76	42	10	125	19	2595	43	19
13.6-28	-	128A6	12	TT	55	W12	152	53	14	154	24	3960	33	19
14.9-28	-	134A6	12	TT	54	W13	174	54	15	161	25	4670	33	19
16.9-28		143 A6	12	TT	59	W15L	206	57	17	171	26	5995	35	19



Optimum Tread Design:

- Maximum performance in the field and on-road operations.

First in the Industry with Dual Mud Breakers:

- Ensure better self-cleaning and maximum traction.

Greater Lug Overlap:

- Provides safe and comfortable ride at high speeds.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
600/65R28	-	154D	-	TL	70	DW20B	340	59	24	176	27	8260	35	40
600/70R28	-	161D	-	TL	70	DW20B	377	61	24	183	28	10190	41	40
600/70R30	-	152D	-	TL	69	DW20B	377	63	24	189	29	7820	35	40
600/70R34	-	160D	-	TL	69	DW20B	422	67	24	201	31	9910	35	40
650/75R38	-	169D	-	TL	71	DW21B	558	76	26	229	35	12780	35	40
710/70R38	-	172D	-	TL	75	DW23B	648	77	28	231	35	13880	35	40
710/70R38	-	178D	-	TL	75	DW23B	674	77	28	231	35	16520	49	40
650/85R38	-	173D	-	TL	78	DW23B	705	82	27	244	37	14320	35	40
650/85R38 (SB, SG)	-	173D	-	TL	78	DW23B	705	82	27	244	37	14320	35	40
800/70R38	-	178D	-	TL	78	DW27B	797	82	31	246	37	16520	35	40
620/70R42	-	166D	-	TL	69	DW20B	511	76	25	228	35	11670	35	40
710/70R42	-	173D	-	TL	75	DW23B	699	81	28	243	37	14320	35	40
710/70R42 (SB)	-	173D	-	TL	75	DE23B	699	81	28	243	37	14320	35	40
710/75R42	-	175D	-	TL	77	DW23B	785	84	28	251	38	15200	35	40
620/70R46	-	167D	-	TL	73	DW20B	565	80	25	240	37	12000	35	40

Note: SB- Steel Belted, SG- Stubble Guard



Optimum Tread Design:

- Maximum performance in the field and on-road operations.

First in the Industry with Dual Mud Breakers:

- Ensure better self-cleaning.

Greater Lug Overlap:

- Provides safe and comfortable ride at high speeds.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
420/65R20	-	135D	-	TL	48	W13	134	42	17	125	19	4800	35	40
440/65R20	-	138D	-	TL	56	W14L	148	43	18	128	19	5200	35	40
440/65R24	-	135D	-	TL	56	W14L	169	47	17	139	21	4800	35	40
480/65R24	-	140D	-	TL	59	W15L	199	49	19	145	22	5510	35	40
540/65R24	-	146D	-	TL	63	W16L	244	52	21	154	23	6610	35	40
540/65R26	-	141 D	-	TL	63	W16L	256	54	21	161	24	5670	23	40
440/65R28	-	138D	-	TL	56	W14L	185	51	17	151	23	5200	35	40
480/65R28	-	142D	-	TL	59	W15L	219	53	19	157	24	5840	35	40
540/65R28	-	149D	-	TL	63	W16L	271	56	21	166	25	7160	35	40
540/65R28	-	154 D	-	TL	63	W16L	289	56	21	166	25	8260	46	40
540/65R30	-	150D	-	TL	63	W16L	285	58	21	176	26	7380	35	40
540/65R34	-	152D	-	TL	63	W16L	309	62	21	184	28	7820	35	40
600/65R34	-	157D	-	TL	69	DW20B	390	65	24	194	30	9090	35	40
540/65R38	-	153D	-	TL	63	W16L	338	66	21	196	30	8040	35	40
600/65R38	-	159D	-	TL	69	DW20B	421	69	24	205	32	9640	35	40
650/65R38	-	163D	-	TL	74	DW20B	488	71	25	213	33	10740	35	40
650/65R38 (SB)	-	171D	-	TL	74	DW20B	525	71	25	213	33	13550	52	40
650/65R42		165D		TL	74	DW20B	530	75	25	229	35	11350	35	40

Note: SB- Steel Belted



Tractor Tires Designed with a Unique Mud Breaker:

- Low soil compaction.
- High traction.
- Excellent driving experience.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
360/70R20	-	129D	-	TL	52	W11	111	41	14	123	19	4070	35	40
380/70R20	-	122D	-	TL	52	W12	125	43	15	127	19	3300	23	40
320/70R24	-	116D	-	TL	51	W10	105	43	13	129	20	2760	23	40
360/70R24	-	122D	-	TL	52	W11	135	45	14	136	21	3310	23	40
380/70R24	-	125D	-	TL	52	W12	145	47	15	140	21	3640	23	40
420/70R24	-	130D	-	TL	56	W13	178	49	16	147	22	4190	23	40
420/70R24	-	130D	-	TL	56	W13	178	49	16	147	22	4190	23	40
480/70R24 (SB, SG)	-	138D	-	TL	61	W15L	220	52	19	155	24	5200	23	40
360/70R28	-	125D	-	TL	52	W11	150	49	14	147	23	3640	23	40
380/70R28	-	127D	-	TL	52	W12	162	51	15	152	23	3860	23	40
420/70R28	-	133D	-	TL	56	W13	195	53	16	159	24	4540	23	40
480/70R28	-	140D	-	TL	61	W15L	245	56	19	167	26	5510	23	40
420/70R30	-	134D	-	TL	56	W13	211	55	16	165	25	4670	23	40
480/70R30	-	141D	-	TL	61	W15L	257	58	19	174	27	5680	23	40
480/70R34	-	143D	-	TL	61	W15L	283	62	19	186	29	6010	23	40
480/70R34 (SB, SG)	-	157D	-	TL	63	W15L	318	62	19	187	29	9090	52	40
520/70R34	-	148D	-	TL	68	W16L	331	65	20	193	30	6940	23	40
400/75R38	15.5R38	138D	-	TL	61	W13	224	62	16	185	29	5200	23	40
480/70R38	-	145D	-	TL	61	W15L	308	66	19	198	31	6390	23	40
520/70R38	-	150D	-	TL	68	W16L	364	69	20	206	32	7390	23	40
580/70R38	-	155D	-	TL	73	DW18L	451	72	23	215	33	8540	23	40
580/70R38 (SB)	-	180D	-	TL	73	DW18L	493	72	23	215	33	8540	80	40

Note: SB- Steel Belted, SG- Stubble Guard



Tractor Tires Designed with a Unique Mud Breaker:

- Low soil compaction.
- High traction.
- Excellent driving experience.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
380/80R38	14.9R38	142D	-	TL	58	W12	217	62	15	185	29	5840	35	40
380/80R38 (SB, SG)	14.9R38	152D	-	TL	58	W12	248	62	15	186	29	7820	58	40
480/80R42	18.4R42	156D	-	TL	68	DW16L	376	73	19	217	34	8810	23	40
480/80R46	16.9R46	159D	-	TL	64	W13	330	72	16	218	34	9640	35	40
480/80R46	18.4R46	158D	-	TL	68	DW16L	415	77	19	229	36	9360	35	40
480/80R50	18.4R50	159D	-	TL	68	DW16L	459	81	19	241	38	9640	35	40
480/80R50	18.4R50	165D	-	TL	68	DW16L	472	81	19	241	38	11340	46	40

Note: SB- Steel Belted, SG- Stubble Guard



Tractor Tires Designed with a Unique Mud Breaker:

- Low soil compaction.
- High traction.
- Excellent driving experience.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
250/85R20	9.5R20	116D	-	TL	47	W8	66	37	10	110	17	2750	35	40
280/85R20	11.2R20	116D	-	TL	48	W10	81	39	11	116	17	2750	28	40
320/85R20	12.4R20	119D	-	TL	52	W11	102	41	13	124	19	3000	23	40
250/85R24	9.5R24	109D	-	TL	48	W8	81	41	10	122	19	2270	23	40
280/85R24	11.2R24	115D	-	TL	51	W10	95	43	12	128	20	2680	23	40
280/85R24 (SB)	11.2R24	130 D	-	TL	51	W10	126	43	12	128	20	4190	58	40
320/85R24	12.4R24	122D	-	TL	52	W11	117	45	13	136	21	3300	23	40
340/85R24	13.6R24	125D	-	TL	54	W12	135	47	14	140	21	3630	23	40
380/85R24	14.9R24	131D	-	TL	56	W12	162	49	16	148	22	4300	23	40
420/85R24	16.9R24	137D	-	TL	58	W15L	205	52	17	156	24	5070	23	40
420/85R26	16.9R26	143 D	-	TL	58	W15L	226	54	17	162	25	6000	35	40
250/85R28	9.5R28	112 D		TL	48	W8	85	45	10	134	21	2470	23	40
280/85R28	11.2R28	118D	-	TL	51	W10	107	47	11	140	22	2910	23	40
320/85R28	12.4R28	124D	-	TL	52	W11	131	49	13	148	23	3520	23	40
340/85R28	13.6R28	127D	-	TL	54	W12	150	51	14	152	23	3850	23	40
380/85R28	14.9R28	133D	-	TL	56	W12	182	53	15	160	24	4540	23	40
380/85R28	14.9R28	141D	-	TL	56	W12	198	53	15	160	24	5670	38	40
420/85R28	16.9R28	139D	-	TL	58	W15L	227	56	17	168	26	5350	23	40
380/85R30	14.9R30	135D	-	TL	56	W12	197	55	15	166	26	4806	23	40
420/85R30	16.9R30	140D	-	TL	58	W15L	235	58	17	174	27	5510	23	40
460/85R30	18.4R30	145D	-	TL	62	W16L	286	61	19	182	28	6390	23	40
320/85R32	12.4R32	126D	-	TL	52	W11	149	53	13	160	25	3740	23	40
320/85R32(SB)	12.4R32	145D	-	TL	52	W11	167	54	13	160	25	6390	64	40
380/85R34 (SB,SG)	14.9R34	137D	-	TL	56	W12	214	59	15	178	28	5071	23	40
420/85R34 (SB,SG)	16.9R34	142D	-	TL	58	W15L	258	62	17	187	29	5840	23	40
420/85R34	16.9R34	152D	-	TL	58	W15L	291	62	17	187	29	7820	44	40
460/85R34	18.4R34	147D	-	TL	62	W16L	299	65	19	194	30	6770	23	40
320/85R36	12.4R36	128D	-	TL	52	W11	164	57	13	172	27	3960	23	40
320/85R36	12.4R36	148D	-	TL	52	W11	173	57	13	172	27	6940	67	40
340/85R36	13.6R36	132D	-	TL	54	W12	186	59	14	176	27	4410	23	40
320/85R38	12.4R38	143D	-	TL	52	W11	177	59	13	178	28	6000	52	40
340/85R38	13.6R38	133D		TL	54	W12	192	61	14	182	28	4540	23	40

Note: SB- Steel Belted, SG- Stubble Guard

TDR 850 - [R-1W] [TL]



Tractor



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
380/85R38	14.9R28	141D	-	TL	56	W12	198	53	15	160	24	5670	38	40
420/85R38	16.9R38	144D	-	TL	58	W15L	278	66	17	198	31	6170	23	40
460/85R38	18.4R38	149D	-	TL	62	W16L	327	69	19	206	32	7160	23	40
460/85R38 (SB)	18.4R38	167 D	-	TL	67	W16L	397	69	19	206	32	12015	64	50
460/85R38 (SB,SG)	18.4R38	149D	-	TL	62	W16L	351	69	19	206	32	7160	23	40
520/85R38	20.8R38	155D	-	TL	68	DW16L	426	73	21	218	33	8540	23	40
520/85R42	20.8R42	157D	-	TL	68	DW16L	431	77	21	230	35	9090	23	40
520/85R42	20.8R42	165D	-	TL	68	DW16L	150	77	20	230	35	11340	41	40
520/85R42	20.8R42	169D	-	TL	68	DW16L	462	77	20	230	35	12780	49	40
520/85R46	20.8R46	158D	-	TL	68	DW16L	493	81	21	242	37	9360	23	40
520/85R46	20.8R46	169D	-	TL	68	DW16L	550	81	20	242	37	12780	46	40

Note: SB- Steel Belted, SG- Stubble Guard



Advanced Tread design with Wider & longer footprint:

- More Gripping Edge.
- Excellent Traction with minimum amount of slip.
- Reduce Soil stress, Compaction & improved yields.
- More no of lugs acting together at same time, deliver more tractive force.

Advance VF technology- Built with Strong shoulder with higher draft angle and base radius:

- Built to handle 40% more load than a conventional radial tire, or the same load at 40% lower pressure.

Overlap of lugs:

- Leads to a comfortable and smooth drive on road.

SSR compound (Special Stubble Resistant):

- Longer Tire Life and defense against stubble which provides better protection on field.

Extra Strong Casing with High Performance Steel belts:

- Radially stiffer carcass ,enough to absorb impact and stress and returns its original shape.
- SB offers better impact resistance and exceptional



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Alternate Rim	NRO	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
VF 600/60R28 NRO (SB)	-	160 D	-	TL	63	DW20B	DW21B	DW18L	350	56	24	169	26	9910	29	40
VF 600/65R28 NRO (SB)	-	163D	-	TL	63	DW21B	DW20B	DW20B	380	59	24	176	27	10740	29	40
VF 540/65R30 NRO (SB)		161 D		TL	61	DW20B	W18L DW18L	W16L	325	58	21	173	26	10190	35	40
VF 600/60R30 NRO (SB)	-	162D	-	TL	63	DW20B	DW21B	DW18L	361	58	24	175	27	10460	29	40
VF 600/65R30 NRO (SB)	-	161 D	-	TL	63	DW21B	-	DW20B	396	64	24	182	28	10190	23	40
VF 600/70R30 NRO (SB)	-	170D	-	TL	71	DW21B	DW20B	DW20B	476	63	24	189	29	13230	35	40
VF 380/85R34 (SB)		149 D		TL	58	W13	W12 DW12 DW13	-	243	59	15	178	27	7160	23	40
VF 420/85R34 (SB)	-	159 D	-	TL	60	DW15L	DW14L	-	305	62	17	187	29	9640	35	40
VF 600/60R34 (SB)	-	160 D	-	TL	63	DW20B	DW21B	-	396	62	24	187	29	9910	23	40
VF 600/70R34 NRO (SB)	-	170 D	-	TL	71	DW21B	DW20B	DW20B	520	67	24	202	31	13220	29	40
VF 650/60R34 NRO (SB)	-	168 D	-	TL	71	DW23B	DW21B	DW20B	488	65	26	194	29	12330	29	40

Note: VF- Very High Flexion, SB- Steel Belted, SG- Steel Guard, NRO: Narrow Rim Option

VDR 2000 - [R-1W] [TL]



Tractor



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Alternate Rim	NRO	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
VF 650/65R34 NRO (SB)	-	170 D	-	TL	74	DW23B	DW21B	DW20B	551	67	26	202	31	13220	29	40
VF 710/60R34 NRO (SB)	-	173 D	-	TL	68	DW25B	DW24B DW27B	DW23B	546	68	28	203	31	14320	29	40
VF 380/80R38 (SB)	-	167D	-	TL	59	DW12	W12	-	287	62	15	186	29	12000	64	40
VF 380/95R38 NRO (SB)	-	159 D	-	TL	61	W13	W12	W12	317	66	15	199	31	9640	35	40
VF 420/85R38 (SB)		155 D		TL	61	DW15L	DW14L	-	341	66	17	198	31	8540	23	40
VF 650/65R38 (SB)	-	180D	-	TL	74	DW23B	DW21B	-	592	71	26	214	33	17620	46	40
VF 710/60R38 NRO (SB)	-	174D	-	TL	68	DW25B	DW24B DW27B	DW23B	567	72	28	215	33	14760	29	40
VF 710/70R38 NRO (SB)	-	181 D	-	TL	79	DW25B	DW24B DW23B	DW23B	561	77	28	232	35	18170	29	40
VF 800/70R38 NRO (SB)	-	187D	-	TL	76	DW28B	DW25B DW27B DW30B	DW27B	937	82	32	247	37	21480	29	40
VF 650/65R42 NRO (SB)	-	174D	-	TL	74	DW23B	DW21B	DW20B	607	75	26	226	35	14760	29	43
VF 710/60R42 NRO (SB)	-	176D	-	TL	68	DW25B	DW24B DW27B	DW23B	613	76	28	227	35	15640	29	43
VF 710/70R42 NRO (SB)	-	185 D	-	TL	79	DW25B	DW23B DW24B	DW23B	613	81	28	244	37	20370	35	40
VF 900/60R42 NRO (SB)	-	189 D	-	TL	77	DW30B	-	DW28B	1032	85	35	253	39	22690	29	40
VF 750/70R44 (SB)	-	186 D	-	TL	84	DW25B	-	-	955	85	29	255	39	20930	29	40
VF 380/85R46 (SB)	-	162 D	-	TL	58	W13	DW12 W12 DW13	-	338	71	15	214	34	10460	41	40
VF 480/80R46 NRO (SB)		177 D		TL	66	DW16L	DW15L	DW16L	472	76	19	229	35	16080	52	40
VF 480/95R54 NRO (SB)		180 D		TL	67	DW16L	DW15L	DW15L	648	90	19	648	42	17620	41	40

Note: VF-Very High Flexion, SB-Steel Belted, SG-Stubble Guard, CFO-Cyclical Field Operation , NRO- Narrow Rim Option

Size	Pref Rim	Alt Rim	Type	Tread Depth (32 nds)	Wt (lbs)	Unloaded Dimension		RC inches	SLR inches	LI/SI	Psi	Recommended load, (lbs)						
						SW inches	OD inches					Speed (mph)					CFO	
												Harvester Application					Upto 15 Cyc.	Upto 30 Cyc.
												6	16	19	25	31		
VF 600/65R28 CFO (SB)	DW21B	DW20B	TL	63	408	24	59	176	27	166A8	35	11780	11040	10930	11670	10700	15810	13260
VF 540/65R30 CFO (SB)	DW20B	W18L DW18L	TL	61	351	21	58	173	26	161 A8	35	10260	9630	9520	10190	9340	13810	11560
VF 710/70R38 CFO (SB)	DW25B	DW24B DW23B	TL	79	772	28	77	232	35	183 A8	35	19450	18220	18040	19270	17690	26120	21870
VF 800/70R38 CFO (SB)	DW28B	DW25B DW27B DW30B	TL	79	941	32	82	247	37	190A8	35	23550	22050	21830	23350	21410	31630	26500
VF 710/70R42 CFO (SB)	DW25B	DW23B DW24B	TL	79	838	28	81	244	37	190 A8	46	23550	22050	21830	23350	21410	31630	26500

Note: VF-Very High Flexion, SB-Steel Belted, SG-Stubble Guard, CFO-Cyclical Field Operation , NRO- Narrow Rim Option



Multi-angle Tread Pattern:

- Distinctive shoulder design provides high traction.
- Dual mud breaker ensures better self-cleaning properties.

Handling & Comfort:

- Larger footprint ensures better stability on-field and on-road.
- Safeguards comforts on all surfaces.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
240/70R16	-	104D	-	TL	34	W8	43	29	10	87	13	1980	35	40
260/70R16	-	109D	-	TL	35	W8	49	30	10	91	14	2270	35	40
280/70R16	-	112D	-	TL	37	W9	55	31	11	94	14	2470	35	40
320/65R16	-	117D	-	TL	38	W10	66	32	13	97	15	2835	35	40
280/70R18	-	114D	-	TL	37	W9	59	33	11	100	15	2600	35	40
320/65R18	-	109 D	-	TL	38	38	71	34	13	103	16	2270	23	40
340/65R18	-	113D	-	TL	39	W11	76	35	14	106	16	2530	23	40
260/70R20	-	113D	-	TL	35	W8	57	34	10	103	16	2530	35	40
280/70R20	-	116D	-	TL	37	W9	65	35	11	106	16	2750	35	40
300/70R20	-	120D	-	TL	38	W9	74	37	12	112	17	3080	35	40
320/70R20	-	123D	-	TL	39	W10	78	39	13	116	18	3410	35	40



Narrow & Sprayer Tires Designed with a Unique Mud Breaker:

- High load-carrying capacity for smooth operations.
- High traction.
- Ensures soil protection and provides better roadability.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
210/90R24	8.3R24	107 A8/B	-	TL	40	W7	63	39	8	116	18	2150	35	31
210/95R28	8.3R28	116 A8/B	-	TL	40	W7	72	44	8	131	20	2750	44	31
420/90R30	-	147A8/B	-	TL	62	DW13	241	60	17	179	27	6779	35	31
210/95R32	8.3R32	116D/119A8	-	TL	40	W7	80	48	8	143	22	2756	39	40
230/95R32	9.5R32	128D	-	TL	43	W7	92	49	9	147	23	3960	58	40
270/95 R32	11.2R32	136D	-	TL	46	W9	119	52	11	156	24	4938	58	40
320/85R34	12.4R34	141D	-	TL	48	W11	150	55	13	166	26	5677	52	31
230/95R36	9.5R36	130D	-	TL	43	W7	102	53	9	159	25	4190	58	40
270/95R36	11.2R36	139D	-	TL	46	W9	131	56	11	168	26	5350	58	40
270/95R38	11.2R38	140D	-	TL	46	W9	136	58	11	174	27	5510	58	40
380/95R38	-	147D/150A8	-	TL	61	W12	241	66	15	199	31	6779	35	40
230/95R40	9.5R40	132D/135A8	-	TL	43	W7	111	57	9	171	27	4409	58	40
230/95R42	9.5R42	133D	-	TL	43	W7	114	59	9	177	28	4540	58	40
270/95R42	11.2R42	139D	-	TL	46	W9	145	62	11	186	29	5350	49	40
320/80R42	12.4R42	141A8/141B	-	TL	48	W10	168	62	13	186	29	5677	46	31
320/90R42	12.4R42	144D/147A8	-	TL	48	W10	188	65	13	193	30	6173	46	40
230/95R44	9.5R44	134D	-	TL	43	W7	120	61	9	183	29	4670	58	40
270/95R44	11.2R44	142D	-	TL	46	W9	153	64	11	192	30	5840	58	40
300/95R46	12.4R46	148D	-	TL	48	W9	188	68	12	205	32	6940	58	40
320/90R46	12.4R46	148D	-	TL	48	W10	195	69	13	205	32	6940	52	40
340/85R46	13.6R46	150 D	-	TL	48	W12	218	69	14	206	32	7380	52	40
380/90R46 (SB)	14.9R46	159D	-	TL	51	W12	307	73	15	218	34	9640	58	40
380/90R46 (SB)	14.9R46	173D	-	TL	51	W12	341	73	15	218	34	14320	88	40
230/95R48	9.5R48	136D	-	TL	43	W7	130	65	9	195	31	4930	58	40
270/95R48	11.2R48	144D	-	TL	46	W9	165	68	11	204	32	6170	58	40
340/85R48	13.6R48	151D	-	TL	48	W12	218	71	14	212	33	7600	52	40
320/90R50	12.4R50	150D	-	TL	48	W10	212	73	13	217	34	7380	52	40
480/95R50	-	164D/167A8	-	TL	67	W15L	462	86	19	257	40	11023	35	40
300/95R52 (SB)	12.4R52	156D	-	TL	48	W9	245	74	12	223	35	8810	70	40
270/95R54 (SB)	11.2R54	156D	-	TL	46	W9	217	74	11	222	35	8810	81	40

Note: SB- Steel Belted



Advance VF technology:

- Built to handle 40% more load than a conventional radial tire, or the same load at 40% lower pressure.

Extra Strong Casing with High Performance Steel belts:

- Provides exceptional puncture resistance, with even footprint to disperse load equally.
- SB offers better impact resistance & defence against stubble to enhance tire durability.

Stronger lugs with larger Contact Patch:

- Excellent traction which decreases slippage, delivers lower fuel consumption, and increases overall productivity.
- Better Roadability.

Designed with a unique mud breaker:

- Self cleaning and reinforcement to lugs.

Reinforced sidewalls and bead zones:

- Increased casing stiffness to carry extra load and easy of fitment.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
VF580/85R42 (SB)	-	183D	-	TL	71	DW20B	623	80	23	241	37	19290	41	40
VF380/90R46 (SB)	-	173D	-	TL	59	W13	334	73	15	219	34	14320	64	40
VF520/85R46 (SB)	-	173D	-	TL	67	DW18L	518	81	21	243	37	14330	29	40
VF320/90R50 (SB)	-	169D	-	TL	56	W11	274	73	13	218	34	12787	70	40
VF380/90R50 (SB)	-	175D	-	TL	59	W13	376	77	15	231	36	15212	64	40
VF 380/105R50 (SB)	-	179 D	-	TL	60	W13	431	81	15	244	38	17086	64	40
VF 420/95R50 (SB)	-	177 D	-	TL	62	W14L	420	81	16	244	38	16094	52	40
VF480/80R50 (SB)	-	179D	-	TL	66	DW16L	486	80	19	241	38	17086	52	40
VF 480/95R50 (SB)	-	176 D	-	TL	67	DW16L	535	86	19	258	40	15653	35	40
VF320/90R54 (SB)	-	168D	-	TL	56	W11	289	77	13	230	36	12330	64	40
VF 380/90R54 (SB)	-	176 D	-	TL	59	W13	406	81	15	243	38	15640	64	40
VF380/105R54 (SB)		180 D		TL	60	W13	445	85	15	256	40	17637	64	40

Note: VF- Very High Flexion SB- Steel Belted



Advance VF Technology:

- Built to handle 40% more load than a conventional radial tire, or the same load at 40% lower pressure.

Directional Lug with Continuous Center Support:

- Excellent traction which decreases slippage, delivers lower fuel consumption, and increases overall productivity.
- Better Roadability.

Reinforced Sidewalls and Bead Zones:

- Increased casing stiffness to carry extra load and easy of fitment.

Extra Strong Casing with High Performance Steel Belts:

- Provides exceptional puncture resistance, with even footprint to disperse load equally.
- SB offers better impact resistance and defence against stubble to enhance tire durability.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
VF380/90R46 (SB)	-	173D	-	TL	49	W13	350	73	15	219	34	14320	64	40

Note: VF- Very High Flexion SB- Steel Belted



Multi-block tread design with Wider footprint:

- Tread design gives wider footprint and gives excellent grip on/off road application even winter condition.
- Offset shoulder block design gives stable and comfortable driving response both ON/OFF road.

Unique Center Lug:

- Provides Stability and a smooth, comfortable ride on hard surfaces, soft conditions even in mud and snow.

High number of blocks with high rubber-to-void ratio:

- Provides low tire vibration and stable ride.

Extra Strong Casing Equipped with Steel Belts:

- Higher load-carrying capacity in all applications & Improved Puncture resistance.

Special Tread Compound:

- Longer Tire Life and provides even wear both on the road and in the field.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
250/75R16 SB	-	120G		TL	19	W8	49	31	10	92	14	3080	65	56
340/80R18 (SB)	12.5R18	143A8/138D	-	TL	32	11	122	39	14	118	18	5200	58	40
340/80R20 (SB)	12.5R20	144A8/141D		TL	44	11X20	134	41	14	124	19	5510	58	40
360/80R20 (SB)	13.6R20	147A8/143D	-	TL	33	11	141	43	14	128	19	6000	58	40
400/70R20 (SB)	16.0/70R20	149A8/144D	-	TL	32.8	13	152	42	16	126	19	6170	58	40
360/80R24 (SB)	13.6R24	143A8/138D	-	TL	33	DW11	158	47	14	140	21	5200	46	40
400/80R24 (SB)	14.9R24	149A8/144D	-	TL	34	DW13	192	49	16	147	22	6170	46	40
440/80R24 (SB)	16.9R24	154A8/149D	-	TL	34	DW14L	222	52	17	155	23	7160	46	40
460/70R24 (SB)	17.5LR24	159A8/154D	-	TL	33	DW15L	230	49	18	148	23	8260	58	40
500/70R24 (SB)	19.5LR24	164A8/159D	-	TL	37	DW16L	259	52	20	154	23	9640	58	40
540/70R24 (SB)	-	168A8/162D	-	TL	35	DW16L	294	54	21	161	24	10460	58	40
480/80R26 (SB)	18.4R26	160A8/155D	-	TL	37	DW15L	283	56	19	168	26	8540	46	40
580/70R26 (SB)	-	158A8/153D	-	TL	38	DW18L	318	58	23	173	26	8040	35	40
400/80R28 (SB)	16.9R28	151A8/146D	-	TL	34	DW13	215	53	16	159	24	6610	46	40
440/80R28 (SB)	-	156A8/151D	-	TL	34	DW14L	244	56	17	167	25	7600	46	40
480/65R28 (SB)	-	154A8/149D	-	TL	35	DW15L	235	53	19	157	24	7160	46	40
540/65R28 (SB)	16.9R30	160A8/155D	-	TL	35	DW18L	281	56	21	166	25	8540	46	40
440/80R30 (SB)	18.4R30	157A8/153D	-	TL	35	DW14L	257	58	17	173	26	8040	46	40
480/80R30 (SB)	-	162A8/157D	-	TL	37	DW15L	302	60	19	180	28	9090	46	40
540/65R30 (SB)	-	161A8/156D	-	TL	38	W18L	307	58	22	172	26	8810	46	40
600/70R30 (SB)	16.9R34	171A8/166D	-	TL	38	DW20	411	63	24	189	29	11670	46	40
440/80R34 (SB)	18.4R34	159A8/155D	-	TL	35	DW14L	285	62	17	185	28	8540	46	40
480/80R34 (SB)	18.4R38	164A8/159D	-	TL	37	DW15L	332	64	19	192	30	9640	46	40
480/80R38 (SB)	20.8R38	166A8/161D	-	TL	37	DW15L	368	68	19	204	32	10190	46	40
540/80R38 (SB)	-	172A8/167D	-	TL	38	DW16L	438	72	21	215	33	12000	46	40

MDR 1000 - [IND] [TL]



Tractor
Telehandler



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
600/65R38 (SB)	-	170A8/166D	-	TL	38	DW18L	432	69	23	206	32	11670	46	40
650/65R38 (SB)	-	175A8/170D	-	TL	40	DW20B	490	71	25	213	33	13220	46	40
650/65R38 (SB) (SG)	-	175A8/170D	-	TL	40	DW20B	497	71	25	213	33	13220	46	40
650/85R38 (SG)	-	183A8/178D	-	TL	45	DW23B	719	82	27	244	37	16520	46	40
620/80R42 (SB)		181A8/177D		TL	44	DW20B	662	81	25	242	37	16080	46	40
650/65R42 (SB)		176A8/171D		TL	40	DW20B	524	75	25	225	35	13550	46	40
710/70R42 (SB)		185A8/180D		TL	47	DW23B	690	81	28	243	37	17620	46	40

Note: SB- Steel Belted, SG- Stubble Guard

● Harvester





23° Angle Lug Design:

- Stubble resistant design.
- Designed for high load-carrying applications.

Wider Lugs:

- Provides optimum traction.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
23.1-26	-	159A6	16	TL	54	DW20B	386	63	23	189	28	9640	33	19
30.5L-32	-	170A6	18	TL	61	DH27B	629	73	31	217	33	13220	30	19

HRR 200 - [R-1] [TL]



Harvester



- Pattern optimized for quiet running.
- Optimized carcass for better operational stability, roadability and maneuvering.
- Specially designed for high load-carrying capacity.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
500/85R24 (IMP) (SB)	-	171 A8 (FR) 158 A8 (DW)	-	TL	48	W16L	304	58	20	172	26	13550	41	25
620/75R26 (SB)	-	167A8	-	TL	59	DW20B	396	63	25	187	28	12000	46	25
500/85R30 (IMP) (SB)	-	176 A8 (FR) 164 A8 (DW)	-	TL	48	W16L	341	63	20	190	29	15640	41	25
620/75R30 CHO (SB)		169 A8 / B		TL	59	DW20B	453	67	25	199	30	12780	46	25 / 31
650/75R32 (SB)		172 A8		TL	63	DW21B	510	70	26	211	32	13880	46	25
680/85R32 (SB)		179 A8		TL	63	DW21B	714	78	27	232	35	17070	46	25
800/65R32 (SB)		181 A8		TL	67	DW27B	710	73	32	218	33	18170	52	25
800/70R32 (SB)		175 A8		TL	69	DW27B	738	76	32	228	34	15200	35	25
900/60R32 (SB)		191 D		TL	69	DW28B	837	75	35	223	34	24010	64	40
710/75R34 CHO (SB)		184 A8 / B		TL	67	DW23B	708	76	28	227	34	19820	64	25 / 31

Note: SB- Steel Belted, CHO- Cyclic Harvesting Operation, IMP- Implement, FR- Free Rolling, DW- Drive Wheel

● Implement





Optimum Implement Design:

- Minimizes soil compaction and protects the grassland.

Strong Nylon Carcass:

- Provides high load-carrying capacity.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
7.50-10	-	111/99A8	12	TT	11	5.5	22	25	8	75	11	2405	73	25
10.0/80-12	-	116/104A8	8	TL	13	9	34	28	10	84	13	2490	45	31
10.0/80-12	-	121/109A8	10	TL	13	9	34	28	10	84	13	3190	57	25
10.0/75-15.3	260/75-15.3	123/111A8	10	TL	11	9	32	30	10	90	14	3410	57	25
10.0/75-15.3	260/75-15.3	126/114A8	12	TL	11	9	35	30	10	90	14	3370	68	31
10.0/75-15.3	260/75-15.3	130/118A8	14	TL	11	9	35	30	10	90	14	4180	80	25
10.0/75-15.3	260/75-15.3	135/122A8	18	TL	11	9	44	30	10	90	14	4800	103	25
11.5/80-15.3	-	131/119A8	10	TL	11	9	41	33	11	100	15	3870	49	25
11.5/80-15.3	-	135/123A8	12	TL	11	9	42	33	11	100	15	4310	59	31
11.5/80-15.3	-	139/126A8	14	TL	11	9	42	33	11	100	15	4820	69	25
11.5/80-15.3	-	142/129A8	16	TL	11	9	42	33	11	100	15	5260	80	25
11.5/80-15.3	-	144/132A8	18	TL	11	9	50	33	11	100	15	5540	91	25
12.5/80-15.3	300/80-15.3	142/129A8	14	TL	11	9	53	34	12	102	15	5830	62	25
12.5/80-15.3	300/80-15.3	151/139A8	18	TL	11	9	62	34	12	102	15	7590	98	25
400/60-15.5	-	146/133A8	16	TL	13	13	65	34	16	103	16	6615	58	25
10.5/65-16	360/65-16	130/118A8	14	TL	10	W9	37	30	11	89	14	4180	77	25
13.0/75-16	-	138A8	12	TL	15	11	63	35	13	106	16	5190	52	25
14.0/65-16	-	142/129 A8	14	TL	15	11	63	34	14	103	16	5840	58	25
15.0/55-17	-	134/122A8	10	TL	15	13	53	34	15	100	15	4680	39	25
15.0/55-17	-	141/128A8	14	TL	15	13	59	34	15	100	15	5670	54	25
19.0/45-17	-	144/131A8	14	TL	17	16	86	34	19	102	16	6175	44	25
500/50-17	-	149/136A8	14	TL	16	16	94	37	20	110	17	7165	41	25
500/50-17	-	154/142A8	18	TL	16	16	99	37	20	110	17	7440	52	31
10.5/80-18	-	138A8	14	TL	14	W9	54	35	11	104	16	5190	75	25
12.5/80-18	-	148/135A8	16	TL	15	9	75	38	12	114	17	6930	71	25
13.0/65-18	-	144/131A8	16	TL	15	11	68	35	13	105	16	6160	71	25
15.0/70-18	-	151/139A8	16	TL	15	13	93	39	15	117	18	7590	62	25



Wider Footprint:

- Minimizes soil compaction and protects the grassland.

Optimum Height to Width Ratio:

- Ensures stability.

Strong Nylon Carcass:

- Provides high load-carrying capacity.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
260/70-15.3	-	122/110A8	10	TL	14	9	37	30	11	89	14	3300	46	25
260/70-15.3	-	131/119A8	14	TL	14	9	40	30	11	89	14	4290	73	25
300/80-15.3	-	139A8	14	TL	13	9	51	34	12	102	15	5345	54	25
400/60-15.5	-	148/135A8	16	TL	15	13	74	34	16	103	16	6930	61	25
400/60-15.5	-	145/132A8	14	TL	15	13	73	34	16	103	16	6380	52	25
400/60-15.5	-	149/136 A8	18	TL	15	13	77	34	16	103	16	7150	65	25
340/55-16	13.0/55-16	133/121A8	12	TL	15	11	49	31	14	92	14	4530	46	25
340/55-16	13.0/55-16	136 /124A8	14	TL	15	11	48	31	14	92	12	4930	52	25
340/55-16	13.0/55-16	140/128A8	18	TL	15	11	53	31	14	92	14	5500	70	25
380/55-17	15.0/55-17	134/122A8	10	TL	15	13	60	33	15	100	15	4665	38	25
380/55-17	15.0/55-17	141/128A8	14	TL	15	13	57	33	15	100	15	5665	46	25
380/55-17	15.0/55-17	146/134A8	18	TL	15	13	73	33	15	100	15	6600	67	25
480/45-17	19.0/45-17	146/134A8	14	TL	17	16	88	34	19	102	16	6600	46	25
480/45-17	19.0/45-17	149/136A8	18	TL	17	16	96	34	19	102	16	7150	51	25
500/50-17	-	143/131A8	10	TL	17	16	111	37	20	110	17	5995	29	25
500/50-17	-	149/137A8	14	TL	17	16	121	37	20	110	17	7150	41	25
500/50-17	-	154/142A8	18	TL	17	16	116	37	20	110	17	8250	58	25
400/70-20	16.0/70-20	156/144A8	16	TL	15	13	107	42	20	126	19	8800	58	25
500/55-20	-	150/138A8	10	TL	17	16	116	42	20	125	19	7370	35	25
500/55-20	-	155/143A8	12	TL	17	16	129	42	20	125	19	8525	46	25



Specially-designed Directional Tread Pattern:

- Ensures excellent traction and self-cleaning properties.

Superior Carcass Construction:

- High load-carrying capacity and directional stability.

Special Tread Compound:

- Ensures longer tire life.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
6.5/80-12	-	93/80A8	6	TT	18	5J	16	23	6	69	11	1430	52	25
7.00-12	-	95/83A8	6	TL	24	4.5	27	27	7	80	12	1520	36	25
6.5/80-13	-	95/82 A8	6	TT	18	9	17	25	6	74	11	1518	54	25
5.00-15	-	88/75A8	6	TL	20	3.50D	18	26	5	77	12	1230	51	25
6.5/80-15	-	98/86A8	6	TL	20	5.0F	24	26	6	78	12	1650	52	25
7.5L-15	260/75-15.3	113/100A8	8	TL	32	6LB	36	30	8	90	14	2530	54	25
10.0/75-15.3	260/75-15.3	123/111A8	10	TL	29	9	46	31	10	92	14	3410	57	25
10.0/75-15.3 HLV	260/75-15.3	129/123A8	10	TL	29	9	49	31	10	92	14	4070	68	25
10.0/75-15.3	260/75-15.3	130/118A8	14	TL	29	9	48	31	10	92	14	4180	80	25
10.0/75-15.3	-	135/123A8	18	TL	29	9	55	31	10	92	14	4795	103	25
11.5/80-15.3	-	135/123A8	12	TL	29	9	60	34	11	102	15	4795	59	25
11.5/80-15.3	-	139/126A8	14	TL	29	9	60	34	11	102	15	5345	69	25
11.5/80-15.3 HLV	-	145/139A8	14	TL	29	9	68	34	11	102	15	6380	84	25
6.00-16	-	103/91A8	8	TL	23	4.00E	25	29	6	86	13	1925	58	25
6.50-16	-	105/93A8	8	TT	23	4.5	24	30	7	90	14	2040	54	25
7.50-16	-	112/99A8	8	TL	27	5.50F	33	32	8	95	14	2460	46	25
19.0/45-17	-	138/125A8	10	TL	32	16	84	35	19	104	16	5190	33	25
19.0/45-17	-	146/133A8	16	TL	30	16	99	35	19	104	16	6600	46	25
7.50-18	-	114/101A8	8	TT	27	5.50F	33	34	8	101	15	2600	45	25
10.5/80-18	-	131/119A8	10	TL	28	W9	68	35	11	106	16	4290	54	25
12.5/80-18	-	142/129A8	12	TL	35	W9	91	39	12	115	18	5830	54	25
7.50-20	-	116/103A8	8	TT	27	5.50F	40	36	8	107	16	2750	47	25

HLV- High Load Variant



Specially Designed Ribbed Tire:

- Low rolling resistance.

Wider Centre Rib:

- Provides excellent Maneuverability and long tire life.

Constant Tension Construction

- Minimizes Crowning of the Tire.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
9.5L-14 SL	-	111B	8	TL	10	7	30	29	10	88	13	2400	44	31
6.70-15 SL	-	97B	6	TL	8	4	20	28	7	83	13	1610	44	31
7.60-15 SL	-	110B	10	TL	8	6	28	29	8	87	13	2320	62	31
9.5L-15 SL	-	112B	8	TL	10	7	31	30	9	90	14	2470	44	31
9.5L-15 SL	-	121B	12	TL	10	7	38	30	9	90	14	3200	64	31
11L-15 SL	-	113B	8	TL	10	8	33	31	11	91	14	2540	36	31
11L-15 SL	-	121B	12	TL	10	8	40	31	11	91	14	3200	52	31
11L-15 SL	-	128 B	16	TL	10	8	48	31	11	91	14	3960	73	31
12.5L-15 SL	-	127B	12	TL	11	10	48	32	13	97	15	3860	52	31
12.5L-16 SL	-	130B	14	TL	11	10	52	33	13	100	15	4180	56	31
14L-16.1 SL	-	138 B	14	TL	13	W11C	79	37	14	111	17	5203	52	31
16.5L-16.1 SL	-	141B	12	TL	14	14	98	40	17	121	18	5675	40	31
21.5L-16.1 SL	-	152B	14	TL	15	18	141	45	22	133	20	7820	36	31
11.25-24 SL	-	138B	12	TL	13	W10	96	46	13	138	21	5203	48	31
11.25-28 SL		139B	12	TL	13	W10	113	50	13	150	23	5357	48	31



Specially Designed Rib Pattern:

- Ensures soil protection.
- Suitable for both on-road and off-road applications.
- Built for carrying high loads.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
200/60-14.5	-	106A8	10	TT	13	AG 6.75	27	24	8	72	11	2090	73	25
200/60-14.5	-	113A8	14	TT	13	AG 6.75	29	24	8	72	11	2530	102	25
200/60-14.5	-	113A8	14	TL	13	AG 6.75	32	24	8	72	11	2530	102	25
250/65-14.5	-	119A8	12	TL	13	AG 8.00	42	27	10	82	13	2992	68	25

IMB 165 - [IMP] [TL]



Trench Digging,
Tillage and
Orchard Harvesting



Optimal Tread Design:

- Excellent traction & self-cleaning.
- High contact area for better stability and driving comfort.

Superior Carcass:

- Ensures better load-carrying capacity.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
23X8.50-12	-	89 A6	6	TL	16	7JA,7.00-I-55; I-70;I-90	16	23	8	68	10	1280	33	19
26X12.00-12	-	112A6	8	TL	24	10½ JA	34	26	12	77	12	2470	44	19
26x12.00-12	-	117A6	10	TL	24	10½ JA	35	26	12	77	12	2833	55	19
29x12.50-15	-	98B	6	TL	24	10LB	44	30	12	89	14	1650	30	31
31X15.50-15	-	121B	10	TL	25	13LB	62	32	15	94	14	3200	59	31



Directional Tread Pattern:

- Designed for trailers and agricultural implements both on- and off the road.

Robust Lugs with wider footprint:

- Excellent traction and self-cleaning properties.
- Low Soil Compaction & improved yields.

Superior Carcass Construction:

- Designed for trailers and agricultural implements both on- and off the road.

Robust Lugs with wider footprint:

- High load-carrying capacity and directional stability.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
280/60-15.5	-	128/116 A8	6	TL	25.2	AG 8.00	48.8	29.3	10.7	87.7	13.5	3960	58	25
320/60-12	-	132/120 A8	8	TL	25.2	10.50 I	45.5	27.2	12.8	81.3	12.2	4400	58	25



Specially Designed Rib Tire:

- Five-rib design for increased stability in field and roads.

Deeper Tread Groove:

- Provides easy steering machinery equipment.

D.O.T. approved for highway speeds:

- For intermittent highway use on farm implements and wagons in agricultural service.
- Ideally for use in towed implement applications.

Superior Carcass Construction:

- High load-carrying capacity.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
9.5L-15 FI	-	123J	-	TL	11	7	49	30	9	90	14	3420	90	62
11L-15 FI	-	128J	-	TL	13	8LB	53	31	11	92	14	3960	90	62
12.5L-15 FI	-	134J	-	TL	13	10LB	69	32	13	97	15	4680	90	62



Specially-designed Semi Lug Pattern:

- Improves tread wear during trailer application.

Strong Nylon Carcass:

- High load-carrying capacity.

Special Tread Compound:

- Longer tyre life and puncture resistance.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
9.00-16	-	137A6	16	TT	28	6.50H	72	36	10	107	16	5070	105	19
9.00-16	-	138A6	18	TT	28	6.50H	75	36	10	107	16	5200	110	19



Specially designed Lug Pattern:

- Suitable for transport applications both on and off the road.

Tread pattern with high contact patch:

- Provides uniform wear and outstanding stability.

Robust Construction:

- Higher load-carrying.

Special Tread compound:

- Longer Tire Life & Puncture resistance.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)		Psi	Max Speed (mph)	
												Single Load	Dual Load			
10.00-20	-	-	18	TT	31	7.50	128	43	11	127	19	8470	7500	135	125	19



Unique Rib Pattern:

- Excellent Road Grip & ease in steering
- Suitable for transport applications both on and off the road

Tread pattern with high contact patch:

- Provides uniform wear and outstanding stability

Special Shoulder Design:

- More air Circulation in operation

Transverse Tread Design:

- Reduce stone trapping & better safety

Special Tread Compound:

- Longer Tire Life & Puncture resistance



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)		Psi	Max Speed (mph)	
												Single Load	Dual Load			
10.00-20	-	-	18	TT	25	7.5	120	42	11	126	19	8475	7505	135	125	20



- Optimized tread design with improved lateral traction for better operational stability on inclined surfaces and self-cleaning.
- Longer cleat length gives low soil compaction, better traction, and higher stability.
- Better suitability for grassland, garden & tillage operations.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
31X15.50 R15	-	122B	-	TL	24	13LB	68	31	15	93	14	3300	41	31
33X15.50 R15	-	126B	-	TL	24	13LB	76	33	15	99	15	3740	46	31
425/55R17	-	134D	-	TL	34	13	105	35	17	104	16	4670	51	40
380/55R17	15.0/55R17	138 A8 / 125 A8	-	TL	28	13	86	33	15	100	15	5200/3640	41	40
500/50R17 (SB)	-	145D		TL	31	16	130	37	20	110	17	6390	58	40

Note: SB- Steel Belted



Advance VF technology:

- Built to handle 40% more load than a conventional radial tire, or the same load at 40% lower pressure.

Block tread design with Wider footprint:

- Excellent Traction.
- Low Soil Compaction & improved yields.
- Protection for soil & plants.

SSR compound (Special Stubble Resistant):

- Longer Tire Life and defense against stubble which provides better protection on field.

Continuous Center Rib:

- Centre rib improve steering capability and enhance lateral traction.

Extra Strong Casing with High Performance Steel belts:

- Provides exceptional puncture resistance, with even footprint to disperse load equally.
- SB offers better impact resistance and defend against stubble to enhance tire more durable.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
VF 265/85R15 (SB, SG)	-	129 D	-	TL	13	8LB	71	33	10	98	15	4070	44	40
VF 340/60R15 (SB, SG)	-	129 D	-	TL	14	10LB	75	31	13	93	14	4070	41	40
VF 280/70R15 (SB, SG)	-	140 D	-	TL	12	8LB	65	30	11	91	14	5511	81	40
VF 320/70R15 (SB, SG)	-	145 D	-	TL	13.9	10LB	79	33	13	98	15	6393	72	40
VF 380/70R15 (SB SG)	-	152 D	-	TL	15.7	12	109	36	15	108	14	7820	67	40
VF 380/55R16.5 (SB, SG)		148D		TL	15.7	12	93	33	15	99	15	6945	72	40
VF 380/60R16.5 (SB, SG)		147D		TL	15.7	12	99	34	15	104	16	6779	58	40
VF 480/45R17 (SB, SG)		155 D		TL	20	16	127	34	19	102	16	8540	73	40
VF 500/50R17 (SB, SG)		156 D		TL	20	16	144	37	20	110	17	8810	55	40

Note: VF- Very High Flexion SB- Steel Belted, SG- Stubble Guard

SPR 250 - [IMP] [TL]



Agriculture
Trucks



- Uniquely designed to protect fields/grasslands and provide rapid self-cleaning.
- Excellent forward and reverse traction on inclined surfaces.
- Enhanced vehicle stability and Maneuverability on account of improved sidewall stiffness.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
31X15.50 R15	-	122B	-	TL	20	13LB	65	31	15	93	14	3300	41	31
33X15.50 R15	-	126B	-	TL	20	13LB	71	33	15	99	15	3740	46	31
440/50R17 (SB)	-	135D	-	TL	23	13	100	34	17	103	16	4760	52	40
480/45R17 (SB)	-	137D	-	TL	23	16	104	34	19	101	15	5070	58	40
500/50R17 (SB)	-	147D	-	TL	23	16	121	37	20	110	17	6770	64	40

Note: SB- Steel Belted

● Flotation





Optimized Flotation Design:

- Reduces soil compaction.
- Generates traction.
- Self-cleaning properties.

Enhanced Carcass Construction:

- Ensures high load-carrying capacity.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
300/65-12	-	122 A8 F.R.	8	TL	14	9	35.1	27	12	80	12	3300	44	25
400/60-15.5	-	145A8 F.R.	14	TL	23	AG13.00	75	34	16	103	16	6380	52	25
400/60-15.5	-	148A8 F.R.	16	TL	23	AG13.00	78	34	16	103	16	6930	61	25
400/60-15.5	-	151A8 F.R.	18	TL	23	AG13.00	82	35	16	103	16	7590	73	25
480/45-17	-	150 A8 F.R.	16	TL	24	16	96	34	19	102	16	7370	52	25
500/50-17	-	149A8 F.R.	14	TL	16	16	121	37	20	110	17	7150	41	25
500/50-17	-	157A8 F.R.	18	TL	16	16	129	37	20	110	17	9075	58	25
400/55-22.5	-	150A8 F.R.	14	TL	24	13	108	40	16	120	19	7370	44	25
400/55-22.5	-	152A8 F.R.	16	TL	24	13	109	40	16	120	19	7810	58	25
550/45-22.5	-	159A8 F.R.	16	TL	32	16	160	42	22	126	19	9625	41	25
550/45-22.5	-	159A8 F.R.	20	TL	32	16	177	42	22	126	19	11660	51	25
500/45-22.5	-	154A8 F.R.	16	TL	32	16	155	40	20	120	19	8250	52	25
500/50-22.5	-	163A8 F.R.	20	TL	28	AG16.00	160	42	20	127	19	10730	55	25
500/60-22.5	-	163A8 F.R.	16	TL	33	16	196	46	20	138	21	10725	46	25
500/60-22.5	-	170A8 F.R.	20	TL	33	16	184	46	20	138	21	13200	73	25
550/60-22.5 V	-	166A8 F.R.	16	TL	33	16	196	49	22	146	22	11660	44	25
550/60-22.5	-	166A8 F.R.	16	TL	33	16	196	49	22	146	22	11660	44	25
550/60-22.5	-	171A8 F.R.	20	TL	33	16	231	49	22	146	22	13530	51	25
560/60-22.5 HD	-	167A8 F.R.	16	TL	33	16	210	49	22	147	22	26380	41	25
600/50-22.5	-	165A8 F.R.	16	TL	32	20	245	46	24	138	21	11330	41	25
600/50-22.5 HD		171 A8 F.R.	20	TL	31	20	226	46	24	138	21	13530	55	25
600/55-22.5	-	169A8 F.R.	16	TL	33	20	231	49	24	145	22	12760	38	25
700/40-22.5	-	166A8 F.R.	16	TL	33	24	240	45	29	134	21	11660	38	25
700/50-22.5	-	174A8 F.R.	16	TL	33	20	273	50	29	150	23	14740	41	25
600/55-26.5		170A8 F.R.	16	TL	33	20	259	52	25	147	24	13200	38	25
700/50-26.5		174A8 F.R.	16	TL	33	20	297	52	29	157	24	14740	35	25
800/45-26.5		177A8 F.R.	16	TL	33	24	338	55	33	164	25	16060	32	25

Note: V- Value Plus, HD: Heavy Duty, FR: Free Rolling



Block design for all surfaces:

- Specially design to suits for construction transportation of Agri trailer.

Wider Footprint:

- Provides stability and control, good lateral balance and high flotation on soft surfaces.

Cut Resistant Compound:

- Enhanced durability in rugged terrain.
- Exceptional Resistance to cut & abrasion in operation.

High Rubber to Void ratio:

- Superior Grip & Traction along with smooth and comfortable ride on road.
- Uniformly distributed tread rubber to minimize Noise levels while on the road.

Open Tread design with optimized tread grooves :

- Ensure excellent Self-cleaning properties.

Extra Strong Casing with High Performance Steel belts:

- Heavy Duty carcass ,enough to absorb impact and stress and returns its original shape.
- Multiple Steel Belts offers better impact resistance and exceptional puncture resistance to enhance tire more durable.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
560/60R22.5 HD (SB)	-	169 D	-	TL	29	AG20.00	330	49	23	146	22	12780	87	40
600/55R26.5 HD (SB)	-	173 D		TL	30	AG20.00	399	52	24	157	24	14320	87	40
650/55R26.5 HD (SB)		178 D		TL	34	AG20.00	478	55	25	164	25	16520	87	40
600/60R30.5 HD (SB)		178 D		TL	33	AG20.00	507	59	24	176	27	16520	87	40

Note: SB- Steel Belted, HD- Heavy Duty



Steel Belted Directional Tread for Superior Traction:

- Homogenous pattern for on-road and farm applications.
- Tires designed for high load and speed operations.
- Ensure traction and self-cleaning during field operation.
- Enhanced roadability and better mileage.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
480/45R17 (SB)	-	140 D	-	TL		16.00		34	19	102	16	5510	58	40
500/50R17 (SB)	-	149 D	-	TL	20	16.00	141	37	20	110	17	7160	73	40
520/50R17 (SB)	-	151 D	-	TL		16.00		38	20	112	17	7600	73	40
400/45R17.5 (SB)	-	139 D	-	TL	15	14.00	87	32	16	95	14	5350	87	40
500/60R22.5 (SB)	-	155D	-	TL	28	AG16.00	212	46	20	139	21	8540	58	40
560/45R22.5 (SB)	-	152D	-	TL	28	AG16.00	199	42	21	127	19	7820	58	40
560/60R22.5 (SB)	-	164D	-	TL	28	AG16.00	260	49	21	147	22	11010	73	40
580/65R22.5 (SB)	-	166 D	-	TL	28	AG16.00	280	52	22	156	24	11670	58	40
600/50R22.5 (SB)	-	159D	-	TL	28	AG20.00	243	46	24	138	21	9645	58	40
600/50R22.5 (SB)	-	167 D	-	TL	28	AG20.00	273	46	24	138	21	12000	87	40
600/55R22.5 (SB)	-	162 D	-	TL	28	AG20.00	256	40	24	145	22	10460	58	40
620/40R22.5 (SB)	-	154D	-	TL	28	AG20.00	226	42	25	126	19	8260	58	40
650/50R22.5 (SB)	-	163 D	-	TL	30	AG20.00	277	48	25	144	22	10740	58	40
710/40R22.5 (SB)	-	165 D	-	TL	30	AG24.00	274	45	29	134	20	11340	73	40
710/45R22.5 (SB)	-	165 D	-	TL	30	AG24.00	295	48	29	143	22	11340	58	40
600/55R26.5 (SB)	-	165D	-	TL	31	AG20.00	307	52	24	157	24	11354	58	40
650/55R26.5 (SB)	-	170D	-	TL	31	AG20.00	340	55	25	164	25	13220	58	40
650/55R26.5 (SB)	-	178D	-	TL	31	AG20.00	390	55	26	164	25	16520	87	40
650/60R26.5 (SB)	-	180D	-	TL	31	AG20.00	390	57	26	171	26	17620	87	40
650/65R26.5 (SB)	-	174 D	-	TL	31	AG20.00	391	60	25	179	27	14760	58	40
650/65R26.5 (SB)	-	181 D	-	TL	31	AG20.00	435	60	25	179	27	18170	73	40
710/50R26.5 (SB)	-	170D	-	TL	31	AG20.00	375	54	29	163	25	13228	58	40
750/45R26.5 (SB)	-	170D	-	TL	31	AG24.00	363	53	30	159	24	13220	58	40
800/45R26.5 (SB)	-	174D	-	TL	33	AG28.00	393	55	33	165	25	14760	58	40
600/60R30.5 (SB)	-	173 D	-	TL	33	AG20.00	391	59	24	176	27	14320	73	40
710/50R30.5 (SB)	-	176D	-	TL	33	AG20.00	414	58	27	175	27	15640	64	40
750/60R30.5 (SB)		181D	-	TL	33	AG24.00	528	66	30	197	30	18170	58	40
750/60R30.5 (SB) _{ws}		181D	-	TL	33	AG24.00	543	66	31	197	30	18170	58	40
800/45R30.5 (SB)		176 D	-	TL	33	AG24.00	431	59	31	176	27	15640	58	40
850/50R30.5 (SB)		182 D	-	TL	33	AG28.00	545	64	34	192	29	18720	58	40
800/60R32 (SB)		185 D	-	TL	35	DW27B	641	70	32	209	32	20370	58	40

Note: SB- Steel Belted, WS- Wide Section Width



Optimized Non-Directional Block tread design with Wider Footprint:

- Provides excellent field traction while minimizing vibration at roading speed
- Low Soil Compaction in field

High Rubber to Void ratio:

- Provides less vibration & low tyre noise at high speed on hard surfaces and ensures a low rolling resistance which reduces fuel consumption

Open Tread design with optimized tread grooves:

- Ensure excellent Self-cleaning properties

Solid rounded shoulder:

- Solid rounded shoulders for greater resistance to irregular wear, reduced scrub and improved maneuverability

Strong Casing with High Performance Steel belts:

- Provides exceptional puncture resistance, with even footprint to disperse load equally
- SB offers better impact resistance and defends against stubble to enhance tyre more durability.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
560/45R22.5 (SB)	-	152 D	-	TL	28	AG16.00	207	42	22	127	19	7820	58	40
560/60R22.5 (SB)	-	170 D	-	TL	28	AG20.00	301	49	24	146	22	13220	90	40

Note: SB- Steel Belted

● Irrigation





Specially Designed Tread Pattern:

- Excellent traction and outstanding self-cleaning properties.

Robust Nylon Carcass Construction:

- Enhances its ability to carry continuous heavy loads.

Special Tread Compound:

- Minimizes wear and extends tire life significantly.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
11.2-24	-	110A8	6	TL	32	W10	63	43	11	130	20	2330	26	25
14.9-24	-	128A8	8	TL	37	W13	104	49	15	147	22	3960	26	25
11.2-38	-	114A8	6	TL	32	W10	97	57	11	172	27	2600	26	25

● Multi-Purpose





Large Tread Area:

- Increases flotation and minimizes ground disturbance in soil.

Optimized Diamond Lug Pattern with Sipes:

- Reduces groove cracks, minimizes slippage, and enhances productivity.

Heavy Under Tread:

- Ensures puncture and impact resistance, thereby reducing downtime.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
23.1-26 (DB)	-	170A8	18	TL	30	DW20B	319	62	23	187	28	13220	38	25
620/75-30 (DB)	23.1-30	161A6	16	TL	34	DW20A	371	66	24	197	30	10190	33	19
620/75-30 (DB)	23.1-30	164A6	18	TL	34	DW20A	373	66	24	197	30	11010	38	19
650/75-32 (DB)	24.5-32	164A6	16	TL	36	DH21	434	69	25	207	31	11010	30	19
650/75-32 (DB)	24.5-32	167A6	18	TL	36	DH21	442	69	25	207	31	12010	35	19

Note: DB- Dual Bead

MPR 390 - [MPT] [TL]



Trailer



- Optimized tread design provides quiet run at high speeds.
- Carcass optimized for better ride comfort.
- Tread design optimized for better mileage and fuel efficiency.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
355/60R18 (SB)	-	142J	16	TL	12	11	97	35	14	104	16	5840	87	62

Note: SB- Steel Belted

● Lawn & Garden





Directional Block Tread Design with Deeper Tread:

- High Traction.
- Excellent Roadability.
- Combine the best aspects of lug-style R-1 and R-4 designs results in R-3+ tire.

Larger Footprint with more Void:

- Protection for soil & plants.
Low Rolling resistance results in better fuel economy.

Special Rubber compound:

- Longer Tire Life and provides even wear on hard surfaces.

Rounded Shoulder:

- Superior Turf Protection with Excellent Self-Cleaning properties.



Size	ALT Size	LI/SI	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
215/45R10	18X8.50R10	80A8/B	TL	16	7.00-I-55 X 10	19	17	9	53	8	990	38	25
220/55R12	-	82 A8/B	TL	16	7.00B / 7.00-I-90	32	22	9	65	10	1050	28	25
240/60R12	-	89A8/B	TL	16	8.00B / 8.00-I-90	28	23	10	70	11	1280	35	25
315/55R12	26X12.00R12	85A8	TL	23	10.5	42	25	13	76	11	1130	15	25
315/55R12	26X12.00R12	102A8/B	TL	23	10.5	41	25	13	76	11	1870	29	25
220/55R14	-	105 A8/B	TL	16	7JA / 7.00-I-70	28	24	9	70	11	1410	38	25
215/65R14	25X12.00R12	90A8/B	TL	23	7	34	25	9	75	11	1320	30	25
200/60R15	-	83A8/B	TL	14	7JA / 7.00-I-70	25	24	8	73	11	1070	28	25
215/70R15	27X8.50R15	90A8/B	TL	23	7JAX15	38	27	8	80	12	1320	26	25
200/65R16	-	94A8/B	TL	24	W6	31	26	8	78	12	1480	38	25
200/70R16	-	94A8/B	TL	24	W6	32	27	8	81	13	1480	35	25
240/70R16	-	104 A8/B	TL	27	W8	45	29	10	87	13	1980	35	25
260/70R16	-	109 A8/B	TL	29	W8	53	30	10	91	14	2270	35	25
280/70R16	-	112 A8/B	TL	30	W8L	59	31	11	94	14	2470	35	25
305/70R16.5	12R16.5	105A8/B	TL	34	10	75	33	12	100	15	2040	23	25
355/65R17.5	14R17.5	130A8	TL	38	10	118	36	14	101	16	4190	45	25
260/70R18	-	114 A8/B	TL	29	W8	58	32	10	97	15	2600	41	25
280/70R18	-	114 A8/B	TL	30	W8L	64	33	11	100	15	2600	35	25
385/65R19.5	-	130A8/B	TL	38	12	118	36	15	117	18	4180	35	25
300/70R20	-	110 A8/B	TL	30	W9	80	37	12	112	17	2330	23	25
320/70R20	-	113 A8/B	TL	30	W10	87	39	13	116	18	2530	23	25
380/70R20	-	122 A8/B	TL	34	W12	122	43	15	127	19	3300	23	25
380/70R24	-	125 A8/B	TL	34	W12	138	47	15	140	21	3630	23	25
420/70R24	-	130 A8/B	TL	35	W13	165	49	16	147	22	4190	23	25

Forestry



● Agro Forestry





Robust Lug Design:

- Lug is designed for excellent grip, high traction abilities, low slip, suitable for many kinds of Agro-Forestry uses.

Reinforced Sidewall:

- Reinforced sidewall and high turn of plies around strong bead to guarantee minimum impact and perforation.

Special compound equipped with Steel belt:

- To reduce the risk of tire puncture and cut due to branches, tree stumps or stone, AFB 821 tractor tire has **steel belt protection**, strong carcass and **puncture resistant compound** suitable for Agro Forestry work.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
12.4-24 (SB, CR)	-	130A8	16	TL	43	W11	135	46	12	137	21	4190	41	25
13.6-24 (SB, CR)	-	136A8	16	TL	46	W12	157	48	14	143	22	4930	41	25
14.9-24 (SB, CR)	-	140A8	16	TL	43	W13	172	50	15	150	23	5510	41	25
16.9-30 (SB, CR)	-	149A8	16	TL	47	W15L	250	59	17	176	27	7160	41	25
18.4-30 (SB, CR)	-	151A8	16	TL	48	W16L	286	61	18	184	28	7600	41	25
16.9-34 (SB, CR)	-	151A8	16	TL	47	W15L	276	63	17	188	29	7600	41	25
18.4-34 (SB, CR)	-	155A8	16	TL	48	W16L	311	65	18	196	30	8540	41	25
18.4-38 (SB, CR)		155 A8	14	TL	48	W16L	372	69	18	207	32	8540	38	25

Note: SB - Steel Belted, CR - Cut Resistant

● Log Skidder



LSB 780 - [LS-2] [TL]



Log Skidder



- Uncompromising tread design for excellent self-cleaning and longer tread life.
- Optimized lateral stiffness provides better steer control and Maneuverability on wet and dry surfaces.
- Reinforced carcass & shoulder areas with special compound for protection from frequent puncture & cut.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
18.4-26 (SB)	-	152 A6	16	TL	67	DW16A	396	58	18	174	26	7830	40	20
23.1-26 (SB)	-	160A6/172A2	16	TL	72	DW20B	306	64	23	192	29	9910	35	19
28L-26 (SB, DB)	-	165A6	20	TL	76	DW25B	745	65	28	194	29	11400	35	20
28L-26 (SB, DB)		173 A6	26	TL	76	DW25B	770	65	28	194	29	12890	55	25
24.5-32 (SB, DB)	-	169A6 / 181A2	20	TL	81	DH21	908	72	25	216	33	12790	40	20
30.5L-32 (SB, DB)	-	170A6	20	TL	82	DH27	1074	73	31	217	33	13225	30	20
30.5L-32 (SB, DB)	-	176A6	26	TL	82	DH27	1072	73	31	217	33	15700	40	20
30.5L-32 (SB, DB)	-	180A6	32	TL	82	DH27	1106	73	31	217	33	17640	49	20
35.5L-32 (SB, DB)	-	183A6	26	TL	84	DH31H	1372	79	36	237	35	19270	35	20
35.5L-32 (SB, DB)	-	187A6	32	TL	84	DH31H	1403	79	36	237	35	21480	44	20

Note: SB - Steel Belted DB- Dual Bead

● Forestry Forwarder



FFB 840 - [LS-2] [TT/TL]



Forestry
Forwarder



- FFB 840 is a bias steel-belted tire, suitable for forestry applications with forwarders and harvesters.
- The unique tread design and lug angle provide high traction and low slip abilities for improved fuel economy.
- With extensive inter-lug space provides Excellent self-cleaning properties and functions well with or without tracks, but tracks can be added for more demanding environments.
- The tire is equipped with reinforced steel belt for increased resistance to punctures and high load carrying capacity.
- The Reinforced bead area provides resistant to rim slip.
- Large tread width contributes to low soil compaction and driver comfort by providing the wider footprint.
- A Special tread and sidewall compound coupled with robust sidewalls and a high under tread, offers enhanced puncture resistance.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
710/40-22.5 (SB)	-	161A8 HT -161A2\LT -168A2	20	TT/TL	53	AG24.00	351	46	28	138	21	10190	73	25
600/55-26.5 (SB)	-	165A8 HT -165A2\LT -172A2	20	TT/TL	61	AG20.00	430	53	24	159	24	11340	73	25
710/45-26.5 (SB)	-	168A8 HT -168A2\LT -175A2	20	TT/TL	61	AG24.00	486	53	28	159	24	12330	73	25
710/55-26.5 (SB)	-	179A8 HT -179A2 \ LT- 186A2	24	TL	62	AG24.00	586	59	28	178	27	17070	73	25
800/40-26.5 (SB)		170A8 HT -170A2\LT -177A2	20	TT/TL	61	AG28.00	538	53	32	159	24	13220	73	25

Note: SB- Steel Belted



Optimized Tread Design:

- Excellent Traction
- Unique tread design with inter lug-terraces for optimum self-cleaning
- Effective track compatibility and enhance lateral stability

Centre Tie Bar:

- Minimizes lug shuffling in operation
- Strong Lug Base.

Reinforced Steel Belts:

- Provides exceptional puncture resistance & Carry High Load capacity.

Designed for tracks:

- A perfect fit with tracks for exceptional grip.

Stubble guard compound equipped with Robust sidewall:

- Protection against sharp objects in operation.

Reinforced Bead Area:

- Better mounting & Resistance to Slip.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
710/40-22.5 (SB)	-	167A8	24	TL	38	AG24.00	389	46	28	138	21	12000	87	25

Note: SB- Steel Belted



Flotation Tread Design:

- Excellent Traction.
- Better Self Cleaning.

Strong Nylon Carcass:

- High Load Carrying Capacity

Overlap of lugs at centre:

- Provided good Roadability
- Low Tread wear
- Smooth Ride.

Optimized Bead Area:

- Minimizes Bead failure in operation.
- Ease of mounting.
- Resistance to Rim slip.

SSR compound (Special Stubble Resistant):

- Longer Tire Life and defense against stubble which provides better protection on field

Reinforced Steel belts:

- Increased resistance to punctures and a high carrying capacity.



Size	ALT Size	LI/SI	PR	Type	Tread Depth (32 nds)	Preferred Rim	Wt (lbs)	OD inches	SW inches	RC inches	SLR inches	Max Load (lbs)	Psi	Max Speed (mph)
400/60-15.5 (SB)	-	152 A8 / 148 B 140 A8 / 135 B	20	TL	23	AG 13.00	101	34	16	103	16	7810	73	25

Note: SB- Steel Belted

● Tire Care & Usage



- **Section Height:**

The height of a tire from the nominal rim diameter to the top of the tread.

- **Section Width:**

The width of a tire including normal sidewalls, but not including protective side ribs, bars, or other decorations.

- **Overall Diameter:**

Twice the section height (unloaded) plus the nominal rim diameter.

- **Rim Width:**

The measurement on the inside of the rim between the two flanges.

- **Rim Diameter Code:**


The nominal rim diameter in inches.

- **Rolling Circumference:**

The distance an inflated and loaded tire will roll in one revolution.

- **Aspect Ratio:**

Used to describe the ratio of tire "section height" to "section width."
A tire with an aspect ratio of 85 would have a tire section height equal to 85% of the tire's width.

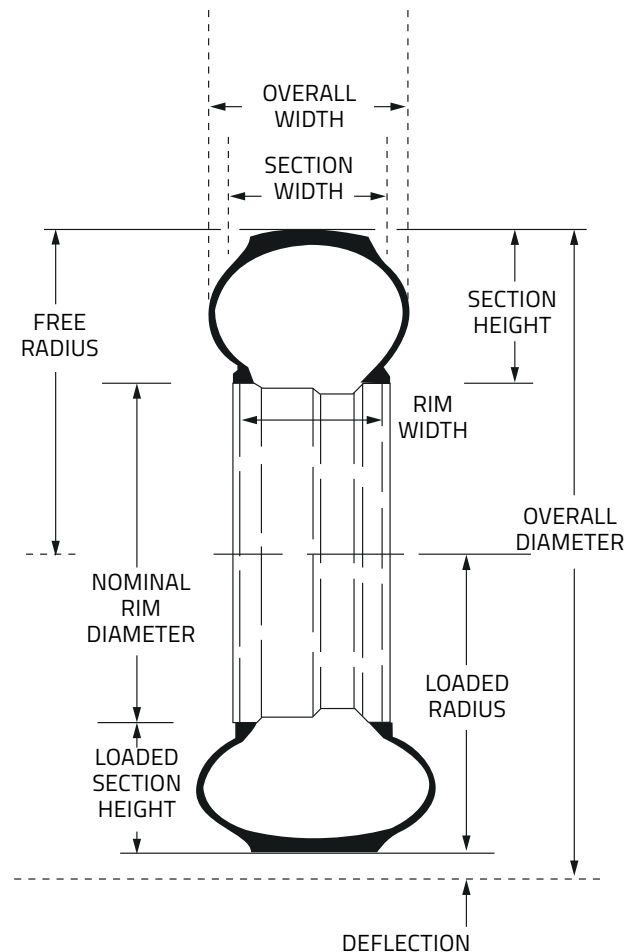

Conversion factors

1 millimetre (mm)	= 0.03937 inches	1 inch (")	= 25.4 millimetres
1 metre (m)	= 1.09361 yards	1 yard	= 0.9144 metres
1 kilometre (km)	= 0.62137 miles	1 mile (mi)	= 1.609344 kilometres
1 litre (l)	= 0.21997 gallons (UK)	1 gallon (UK)	= 4.5461 litres
1 litre (l)	= 0.26417 gallons (USA)	1 gallon (USA)	= 3.7854 litres
1 gram (g)	= 0.035274 ounces	1 ounce (oz)	= 28.34952 grams
1 kilogram (kg)	= 2.205 pounds	1 pound (lb)	= 0.45359 kilograms
1 kilometre per hour (km/h)	= 0.62137 miles per hour	1 mile per hour (mph)	= 1.609344 kilometres per hour
1 kilopascal (kPa)	= 0.145 pounds per square inch	1 pound per square inch (psi)	= 6.895 kilopascal
1 bar	= 100 kilopascal	1 pound per square inch (psi)	= 0.06895 bar
1 kilowatt (kW)	= 1.34 horsepower	1 horsepower (HP)	= 0.746 kilowatts
1 Newton metre (N.m)	= 0.113 inch pound	1 inch pound (in-lb)	= 8.85 inch-pound

Pressure conversion table

PSI	BAR	KPA
10	0.7	70
11	0.8	80
12	0.9	90
13	0.8	80
14	1	100
15	1	100
16	1.1	110
17	1.2	120
18	1.2	120
19	1.3	130
20	1.4	140
21	1.4	140
22	1.5	150
23	1.6	160
24	1.7	170
25	1.7	170
26	1.8	180
27	1.9	190
28	1.9	190

PSI	BAR	KPA
29	2	200
30	2.1	210
31	2.2	220
32	2.1	210
33	2.3	230
34	2.3	230
35	2.4	240
36	2.5	250
37	2.6	260
38	2.6	260
39	2.7	270
40	2.8	280
41	2.8	280
42	2.9	290
43	3	300
44	3	300
45	3.1	310
46	3.2	320
47	3.2	320

PSI	BAR	KPA
48	3.3	330
49	3.4	340
50	3.5	350
51	3.4	340
52	3.6	360
53	3.7	370
54	3.7	370
55	3.8	380
56	3.9	390
57	3.9	390
58	4	400
59	4.1	420
60	4.1	410
61	4.2	420
62	4.3	430
63	4.3	430
64	4.4	440
65	4.5	450
66	4.5	450

Storage

- Keep the tires clean and away from heat, light, ozone or hydrocarbon sources.
- Avoid prolonged exposure of the tires to direct sunlight.
- Avoid any contact with grease, petrol, volatile solvents or other substances that may deteriorate the rubber.
- Avoid horizontal storage for tubeless tires, only small size tires may be stacked or stored flat (maximum 6 months).
- When tires are stored flat (horizontal), the position must be lug against lug.
- Reduce inflation pressure when tires are stored fitted on rims.
- Ensure there is no water or moisture inside the tire.
- Never store tires directly in contact with the ground for long periods.

Tire repairs

For safety reasons, repairs should only be carried out by specialists using the correct tools.

Proper use of tires

- When loading tires you have to consider the correlation between speed, inflation pressure and load capacity.
- Overloading results in premature tire failure. Use the technical documentation and inflation tables which show the load and pressure figures for different operating speeds.
- Underinflation results not only in incorrect tread wear but also in ply separation and eventually further damage to the ply. Overinflation makes the tire stiff and decreases its resistance against hits, leading to ply tear.

Demounting

1. Before Demounting

- Before loosening any nuts or clamps securing the rim assembly to a vehicle
- Always exhaust all air from a single tyre and from both tyres of a dual assembly by removing the valve core prior to removing any wheel components such as nuts and rim clamps.
- Never attempt to demount a tyre from the rim unless you have confirmed that it is completely deflated. Failing to follow this precaution can result in the assembly bursting with enough force to cause serious injury/death.
- Check the valve stem by running a piece of wire through the stem to make sure it is not plugged by foreign material
- A broken rim part under pressure can blow apart and cause serious injury or death.

2. During Demounting

- Keep fingers clear and stand one side and hold the tools with one hand while applying pressure on Demounting tools to the rim flanges to unseat tyre beads

3. After Demounting

- Clean rims and repaint to stop corrosion


Mounting

1. Before Mounting

- Check rim components for cracks. Replace all cracked, badly worn, damaged and severely rusted component with new parts of the same size and type.
- Do not attempt to rework any rim component that is cracked, broken or damaged. Replace the same with new components.
- All parts of multipiece rim are to be assembled properly.
- Use wire brush to remove rust, dirt and other foreign matter from the rim surface, particularly on the bead seats and O-ring slot. Ensure to remove any tyre fill from the rim.
- Always use a new O-ring for tubeless tyres.
- Carefully inspect the inside of the casing for damage or foreign materials, and remove any dirt, liquids, or debris before mounting.
- Lubricate both beads with a thin solution of vegetable oil soap in water or an equivalent rubber lubricant recommended for this purpose. (Avoid petroleum-based solutions or silicones.)

2. During Mounting and Inflation

- Do not hammer any component of the rim while the tyre is inflated or partially inflated.
- Make sure all components are properly seated prior to inflation.
- NEVER inflate beyond 35 psi to seat beads. Use this warning symbol



- Use safety cage while inflating the tyre. Never stand close to a tyre and rim assembly while it is being inflated
- Centring the tyre on the rim is extremely important to prevent broken beads.

3. After Inflation

- Ensure no air leakage specially in tubeless tyres.

Recommendations to extend the lifespan of a tire

Tire pressure

Correct inflation pressure is important for performance, durability, comfort and traction. It is of crucial importance for the life expectancy of your tires that you adjust the tire pressure according to usage and check it regularly. To ensure accurate measurement, the pressure gauge must be calibrated once a year. Measurement of tire inflation pressure must be done when the tires are cold. If the pressure in a warm tire is correct, then it would be too low when the tire has cooled.

Inflation pressure too low

Underinflation can reduce the lifespan due to:

- Damaged carcass cord plies, which can render the tire unusable
- Increased wear
- Carcass damage close to the bead

Road use and operation in the field

These two kinds of usages require different tire inflation pressures. Allowance has been made for this in the tire pressure graphs. Radial and crossply tires must not be used on the same axle, as this can lead to unstable handling.

Visual check

Tires must be checked regularly for damage. Incision damage can be particularly harmful to the cord tissue layers of the tread.

Oil and grease

To avoid damage to the rubber, tires should not come in contact with oil and grease.

Frost protection

To protect against frost when water ballasting, sufficient calcium chloride should be added. Please consult your supplier of calcium chloride about the right ratio.

Slippage of the tire

The following can increase the likelihood of slippage of the tire on the rim:

- Tire pressure too low
- Faulty fitting of the tire bead on the rim
- Overuse of lubricant when fitting a tire
- Wrong rim size

The minimum tire pressure for high-traction work (for example, ploughing) is 11.6 Psi when using an inner tube. A lower pressure increases the chances of the tire turning on the rim and tearing off the valve.

Direction of steering wheels on four wheel drive tractors


When fitting or changing tires ensure that the directional arrow on the sidewall is pointing forward. It is possible to fit the front tires in such a way that the tread turns against the direction of rotation on four wheel drive tractors that are primarily used for transport activities. This will extend the lifespan of the tires. Such fitting is not recommended for field activities, as it radically reduces traction and self-cleaning properties.

Transport instructions



Rim and Wheel Discs

A wheel is made up of a rim and a wheel disc that are fixed to or detachable from each other and must exactly match. The rim size is of crucial importance to the tire/rim combination.



Size designations of rims

Two wheels are shown here with the associated meanings of the size indications.


Rim choice

When using tubeless tires, tubeless rims should also be used. A protective flap must always be used when combining inner tubes with multipiece rims. This prevents damage to the inner tube.

Single rim	Multi-piece rim
4.00 E x 16	13 - 508
This means: 4.00 = rim width code (inches) E = rim flange height x = one piece rim 16 = rim diameter code (inches)	This means: 13 = rim width code (inches) - = rim flange height 508 = rim diameter code (inches)

The most important size indications of wheel discs are the following:

- G = diameter of the central hole
- S = pitch circle diameter of the stud holes and number of stud holes
- N = diameter cleat circle and number of cleats
- D = diameter stud hole and stud hole shape
- E = extra stud holes in case of double fitting
- B = outside diameter disc

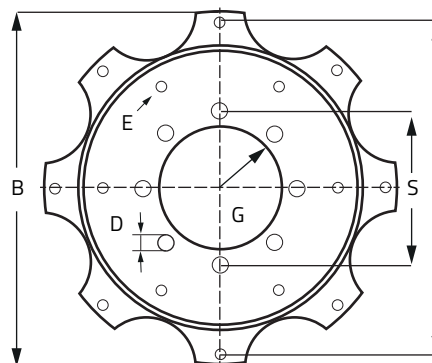


Warning

The diameter of different rim sizes may look very similar, but they're not equal as you can see in the table.



"Small" overall diameter		"Large" overall diameter	
Rim size code	Rim diameter D (mm)	Rim size code	Rim diameter D (mm)
430mm	430.9	17	436.6
15	380.2	15.3	388.3
508mm	508	20	512.8

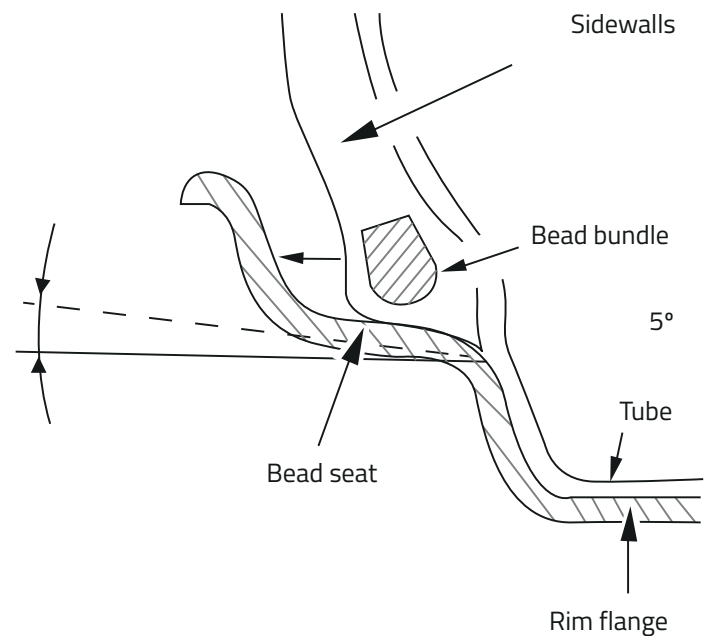

Always use the rim stipulated



If you use a rim which is too narrow, the tread will be convex and, as is the case where tire pressure is too high, there will be excessive wear of the centre of the tread. The fitting of a tire to the wrong rim can lead to highly dangerous consequences! Fitting a "large" tire (like 10.0/75-15.3) on a smaller rim (say rim size code 15) is dangerous. The tire is loose-fitting and in extreme conditions can "blow-off" the ring. Rim chafing can be the consequence. Fitting a "smaller" tire on a rim which is too large in overall diameter can also be dangerous! As the bead diameter of the tire is smaller than the base rim flange diameter, by inflating the tire, the chances of the bead breaking and the tire exploding are high.







SKU / EAN Code: Bias and Radial



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001010028	8904365501825	Tractor 	15	5.00-15	 TSB 110 (TT) F-2	6 / 76 A8
2	3001010001	8904365500323		16	5.50-16		6 / 82 A8
3	3001010002	8904365500330		6.00-16	6 / 85 A8		
4	3001010003	8904365500446		6.00-16	8 / 91 A8		
5	3001010029	8904365501832		6.50-16	6 / 88 A8		
6	3001010017	8904365500354		7.50-16	8 / 99 A8		
7	3001010027	8904365501511		7.50-16	10 / 104 A8		
8	3001010005	8904365500392		9.00-16	10 / 111 A8		
9	3001010015	8904365500408		10.00-16	10 / 115 A8		
10	3001010016	8904365500415		11.00-16	10 / 118 A8		
11	3001010008	8904365500378		18	7.50-18		8 / 102 A8
12	3001010030	8904365501849		19	4.00-19		4 / 69A8
13	3001010010	8904365500347		6.00-19	6 / 89 A8		
14	3001010011	8904365500385		20	7.50-20		8 / 105 A8



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001010018	8904365500422	Tractor 	16	4.50-16	 TSB 111 (TT) F-2	6 / 74 A8
2	3001010032	8904365502617			5.00-16		6 / 76 A8
3	3001010019	8904365500439			5.50-16		6 / 82 A8
4	3001010020	8904365500453			6.00-16		8 / 91 A8
5	3001010043	8904365509357			6.00-16 (HD)		8 / 91 A8
6	3001010021	8904365500460			6.50-16		8 / 94 A8
7	3001010041	8904365509012			6.50-16 (HD)		8 / 94 A8
8	3001010022	8904365500477			7.50-16		8 / 99 A8
9	3001010042	8904365509005			7.50-16 (HD)		8 / 99 A8
10	3001010045	8904365511602			7.50-16		14 / 119 A8
11	3001010023	8904365500484		18	7.50-18		8 / 102 A8
12	3001010024	8904365500491		19	6.00-19		8 / 91 A8
13	3001010025	8904365500507		20	6.50-20		8 / 93 A8
14	3001010026	8904365500514			7.50-20		8 / 105 A8



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001010033	8904365503867	Tractor 	15	9.5L-15 SL	 TSB 112 (TL) F-2	8 / 102 A8
2	3001010034	8904365503874			11L-15 SL		8 / 106 A8
3	3001010035	8904365503881		16	10.00-16 SL		8 / 110 A8
4	3001010036	8904365503898			11.00-16 SL		8 / 114 A8
5	3001010040	8904365509029			11.00-16 SL		12 / 123 A8



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001010012	8904365505007	Tractor 	16	6.00-16	 BOSS TS 10 (TT) F-2	8 / 94 A6
2	3001010013	8904365505014			6.50-16		8 / 98 A6
3	3001010014	8904365505021			7.50-16		8 / 103 A6



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001030092	8904365508220	Tractor 	16	6.50-16	 TDB 120 (TT/TL) R-1	8 / 94 A8
2	3001030050	8904365502747			8.00-16		6 / 88 A8
3	3001030126	8904365515037			9.5-16		8 / 98 A8
4	3001030093	8904365508213		18	8-18		12 / 109 A8
5	3001030123	8904365509616			8.00-18 HD		12 / 116 A8
6	3001030051	8904365502679		20	8.3-20		6 / 92 A8
7	3001030052	8904365502686			9.5-20		6 / 99 A8
8	3001030055	8904365502815			11.2-20		8 / 107 A8
9	3001030097	8904365507735		24	11.2-20 SB SG		8 / 107 A8
10	3001030001	8904365500095			8.3-24		8 / 105 A8
11	3001030117	8904365508831			8.3-24		8 / 105 A8
12	3001030002	8904365500101			9.5-24		8 / 112 A8
13	3001030100	8904365508848			9.5-24		8 / 112 A8
14	3001030086	8904365506431			9.5-24		12 / 116A8
15	3001030003	8904365500118			11.2-24		8 / 116 A8
16	3001030045	8904365502150			11.2-24		8 / 116 A8
17	3001030065	8904365504772			11.2-24		12 / 124 A8
18	3001030004	8904365500132			12.4-24		8 / 121 A8
19	3001030101	8904365508855			12.4-24		8 / 121 A8
20	3001030039	8904365502068			12.4-24		12 / 128 A8
21	3001030007	8904365500156			13.6-24		8 / 123 A8
22	3001030102	8904365508862			13.6-24		8 / 123 A8
23	3001030066	8904365504789			13.6-24		12 / 130 A8
24	3001030009	8904365500187			14.9-24		8 / 128 A8
25	3001030103	8904365509630			14.9-24		8 / 128 A8
26	3001030033	8904365501771			14.9-24		12 / 136 A8
27	3001030014	8904365500217		16.9-24	8 / 133 A8		
28	3001030108	8904365509647		16.9-24	8 / 133 A8		
29	3001030034	8904365501788		16.9-24	12 / 143 A8		
30	3001030056	8904365502822		26	14.9-26		10 / 129 A8
31	3001030087	8904365506448			14.9-26		12 / 134 A8
32	3001030057	8904365502839			16.9-26		10 / 133 A8
33	3001030010	8904365500125		28	11.2-28		8 / 118 A8
34	3001030104	8904365508879			11.2-28		8 / 118 A8
35	3001030011	8904365500149			12.4-28		8 / 123 A8
36	3001030105	8904365508886			12.4-28		8 / 123 A8
37	3001030067	8904365504796			12.4-28		12 / 131 A8
38	3001030012	8904365500170			13.6-28		8 / 125 A8
39	3001030106	8904365509654			13.6-28		8 / 125 A8
40	3001030013	8904365500200			14.9-28		8 / 130 A8
41	3001030107	8904365508893			14.9-28		8 / 130 A8
42	3001030040	8904365502075			14.9-28		12 / 137 A8
43	3001030015	8904365500231			16.9-28		8 / 135 A8
44	3001030109	8904365508909			16.9-28		8 / 135 A8
45	3001030036	8904365501931		16.9-28	12 / 143 A8		
46	3001030058	8904365502846		30	7.2-30		6 / 96 A8
47	3001030053	8904365502754			9.5-30		6 / 111 A8
48	3001030059	8904365502853			14.9-30		8 / 127 A8
49	3001030016	8904365500248			16.9-30		8 / 137 A8
50	3001030110	8904365508916			16.9-30		8 / 137 A8
51	3001030035	8904365501795			16.9-30		12 / 144 A8
52	3001030073	8904365505656			16.9-30		14 / 146 A8
53	3001030019	8904365500279			18.4-30		8 / 139 A8
54	3001030113	8904365508923			18.4-30		8 / 139 A8
55	3001030032	8904365501535			18.4-30		14 / 152 A8
56	3001030068	8904365504802		18.4-30	16 / 154 A8		



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
57	3001030031	8904365500545		32	8.3-32	 TDB 120 (TT/TL) R-1	8 / 107 A8
58	3001030122	8904365509364			8.3-32 HD		8 / 107 A8
59	3001030054	8904365502761			9.5-32		6 / 106 A8
60	3001030005	8904365500163			12.4-32		8 / 125 A8
61	3001030017	8904365500262		34	16.9-34		8 / 139 A8
62	3001030111	8904365508930			16.9-34		8 / 139 A8
63	3001030129	8904365509661			16.9-34		12 / 144 A8
64	3001030130	8904365509678			16.9-34		14 / 149 A8
65	3001030020	8904365500293		36	18.4-34		8 / 142 A8
66	3001030114	8904365508947			18.4-34		8 / 142 A8
67	3001030037	8904365501948			18.4-34		14 / 153 A8
68	3001030006	8904365500194			12.4-36		8 / 126 A8
69	3001030088	8904365506455		36	12.4-36		14 / 139 A8
70	3001030008	8904365500224			13.6-36		8 / 129 A8
71	3001030069	8904365504819			13.6-36		12 / 138 A8
72	3001030089	8904365506462			13.6-36		14 / 142 A8
73	3001030047	8904365502358		38	13.6-38		8 / 131 A8
74	3001030116	8904365508954			13.6-38		8 / 131 A8
75	3001030070	8904365504826			13.6-38		10 / 136 A8
76	3001030090	8904365506479			13.6-38		14 / 138 A8
77	3001030022	8904365500255			15.5-38		8 / 133 A8
78	3001030115	8904365508961			15.5-38		8 / 133 A8
79	3001030084	8904365506004			15.5-38		10 / 138 A6
80	3001030085	8904365506011			15.5-38		12 / 141 A6
81	3001030018	8904365500286			16.9-38		8 / 141 A8
82	3001030112	8904365508978			16.9-38		8 / 141 A8
83	3001030071	8904365504833			16.9-38		14 / 151 A8
84	3001030021	8904365500309			18.4-38		8 / 143 A8
85	3001030046	8904365502167	18.4-38		8 / 143 A8		
86	3001030072	8904365504840	18.4-38		14 / 155 A8		



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001030063	8904365505298		12	5-12	 TDB 121 (TT/TL) R-1W+	6 / 64A6/60A8
2	3001030064	8904365505304			6-12		6 / 71A6/67A8
3	3001030062	8904365505311			14		4 / 66A6/63A8
4	3001030075	8904365505328		18	9.5-18		8 / 105A6/101A8
5	3001030074	8904365505335		20	8.3-20		8 / 101A6/98A8
6	3001030076	8904365505342			9.5-20		8 / 107A6/103A8
7	3001030077	8904365505359		24	9.5-24		8 / 111A6/108A8
8	3001030078	8904365505366			12.4-24		8 / 120A6/117A8
9	3001030083	8904365505373		26	13.6-26		8 / 126A6/123A8
10	3001030079	8904365505380		28	12.4-28		12 / 131A6/127A8
11	3001030080	8904365505397			13.6-28		12 / 134A6/130A8
12	3001030081	8904365505403			14.9-28		12 / 137A6/133A8
13	3001030082	8904365505410			16.9-28		12 / 143A6/139A8



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001030049	8904365502532		26	23.1-26	 TDB 123 (TT/TL) R-1	12 / 153 A8
2	3001030024	8904365500521			23.1-26		16 / 159 A8
3	3001030044	8904365502129			23.1-26		16 / 159 A8
4	3001030048	8904365502310		38	20.8-38		8 / 148 A8
5	3001030091	8904365506578			20.8-38		14 / 159 A8
6	3001030131	8904365514573			20.8-38		14 / 159A8



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001030061	8904365504208	Tractor 	32	24.5-32	 TDB 124 (TL) R-1	12 / 159 A6



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001030132	8904365514887	Tractor 	24	12.4-24	 TDB 125 (TL) R-1	8 / 117 A8 / 121 A6
2	3001030133	8904365514894			13.6-24		8 / 120 A8 / 123 A6



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001030025	8904365504963	Tractor 	28	12.4-28	 BOSS TD 15 (TT) R-1	12 / 125 A6
2	3001030026	8904365504970			13.6-28		12 / 128 A6
3	3001030027	8904365504987			14.9-28		12 / 134 A6
4	3001030028	8904365504994			16.9-28		12 / 143 A6
5	3001030029	8904365501528		30	18.4-30		14 / 152 A8



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001030124	8904365514436	Tractor 	24	9.5-24	 BOSS TD 16 (TT) R-1	12 / 114 A6
2	3001030094	8904365508251		28	13.6-28		12 / 128 A6
3	3001030128	8904365508268			14.9-28		12 / 134 A6
4	3001030125	8904365509715			16.9-28		12 / 143 A6



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001040049	8904365502440	Tractor 	28	600/65R28	 XLR 880 (TL) F-2	154 D
2	3001040118	8904365502624			600/70R28		161 D
3	3001040037	8904365502457		30	600/70R30		152 D
4	3001040154	8904365504710			34		600/70R34
5	3001040179	8904365507650		38	650/75R38		169D
6	3001040038	8904365502396			710/70R38		172 D
7	3001040111	8904365502402			710/70R38		178 D
8	3001040121	8904365502655			800/70R38		178 D
9	3001040120	8904365502648			650/85R38		173 D
10	3001040183	8904365507797			650/85R38 SB & SG		173 D
11	3001040119	8904365502631			42		620/70R42
12	3001040112	8904365502464		710/70R42			173 D
13	3001040182	8904365507766		710/70R42 SB			173 D
14	3001040126	8904365502969		710/75R42			175 D
15	3001040219	8904365509494		46			620/70R46



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001040157	8904365505830	Tractor 	20	420/65R20	 TDR 650 (TL) R-1W	135 D
2	3001040156	8904365505847			440/65R20		138 D
3	3001040040	8904365502808		24	440/65R24		135 D
4	3001040041	8904365502273			480/65R24		140 D
5	3001040042	8904365502259			540/65R24		146 D
6	3001040249DF	8904365514818		26	540/65R26		141 D
7	3001040155	8904365505281		28	440/65R28		138 D
8	3001040043	8904365502266			480/65R28		142 D
9	3001040044	8904365502242			540/65R28		149 D
10	3001040251DF	8904365514924			540/65R28		154 D
11	3001040045	8904365502235		30	540/65R30		150 D
12	3001040046	8904365502228		34	540/65R34		152 D
13	3001040047	8904365502297			600/65R34		157 D
14	3001040048	8904365502303		38	540/65R38		153 D
15	3001040050	8904365502280			600/65R38		159 D
16	3001040108	8904365502365			650/65R38		163 D
17	3001040169	8904365504758			650/65R38 SB		171 D
18	3001040109	8904365502372		42	650/65R42		165 D



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001040127	8904365503355	Tractor 	20	360/70R20	 TDR 700 (TL) R-1W	129 D
2	3001040128	8904365503362			380/70R20		122 D
3	3001040061	8904365501733		24	320/70R24		116 D
4	3001040062	8904365501726			360/70R24		122 D
5	3001040063	8904365501702			380/70R24		125 D
6	3001040064	8904365501740			420/70R24		130 D
7	3001040180	8904365507773			420/70R24 SB SG		130 D
8	3001040065	8904365501665			480/70R24		138 D
9	3001040066	8904365501719		28	360/70R28		125 D
10	3001040067	8904365501696			380/70R28		127 D
11	3001040068	8904365501689			420/70R28		133 D
12	3001040069	8904365501658			480/70R28		140 D
13	3001040070	8904365501672		30	420/70R30		134 D
14	3001040071	8904365501641			480/70R30		141 D
15	3001040072	8904365501634		34	480/70R34		143 D
16	3001040151	8904365504390			480/70R34 SB SG		157 D
17	3001040073	8904365501610			520/70R34		148 D
18	3001040218	8904365509487		38	400/75R38 (15.5R38)		138D
19	3001040074	8904365501627			480/70R38		145 D
20	3001040075	8904365501764			520/70R38		150 D
21	3001040076	8904365501757			580/70R38		155 D
22	3001040106	8904365501924			580/70R38 SB		180 D



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001040125	8904365502860	Tractor 	38	380/80R38 (14.9R38)	 TDR 800 (TL) R-1W	142 D
2	3001040152	8904365504406			380/80R38 (14.9R38) SB SG		152 D
3	3001040220	8904365509463		46	420/80R46 (16.9R46)		159 D
4	3001040107	8904365502198		42	480/80R42 (18.4R42)		156 D
5	3001040079	8904365502204		46	480/80R46 (18.4R46)		158 D
6	3001040080	8904365502211		50	480/80R50 (18.4R50)		159 D
7	3001040117	8904365502495			480/80R50 (18.4R50)		165 D

Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI	
1	3001040174	8904365506912	Tractor 	20	250/85R20 (9.5R20)	 TDR 850 (TL) R-1W	116D	
2	3001040129	8904365503386			280/85R20 (11.2R20)		116 D	
3	3001040130	8904365503393			320/85R20 (12.4R20)		119 D	
4	3001040122	8904365502938		24	250/85R24 (9.5R24)		109 D	
5	3001040081	8904365501115			280/85R24 (11.2R24)		115 D	
6	3001040227	8904365509319			280/85R24 (11.2R24) SB		130D	
7	3001040083	8904365501139			320/85R24 (12.4R24)		122 D	
8	3001040087	8904365501153			340/85R24 (13.6R24)		125 D	
9	3001040090	8904365501177			380/85R24 (14.9R24)		131 D	
10	3001040092	8904365501184			420/85R24 (16.9R24)		137 D	
11	3001040239	8904365514641		26	420/85R26 (16.9R26)		143 D	
12	3001040318DF	8904365514900		28	250/85R28 (9.5R28)		112 D	
13	3001040082	8904365501122			280/85R28 (11.2R28)		118 D	
14	3001040084	8904365501146			320/85R28 (12.4R28)		124 D	
15	3001040088	8904365501160			340/85R28 (13.6R28)		127 D	
16	3001040091	8904365501382			380/85R28 (14.9R28)		133 D	
17	3001040215	8904365508664			380/85R28		141 D	
18	3001040093	8904365501207		30	420/85R28 (16.9R28)		139 D	
19	3001040113	8904365502426			380/85R30 (14.9R30)		135 D	
20	3001040094	8904365501214			420/85R30 (16.9R30)		140 D	
21	3001040097	8904365501245		32	460/85R30 (18.4R30)		145 D	
22	3001040085	8904365501399			320/85R32 (12.4R32)		126 D	
23	3001040005	8904365505779			320/85R32 (12.4R32) SB		145 D	
24	3001040114	8904365502433		34	380/85R34 (14.9R34)		137 D	
25	3001040095	8904365501221			420/85R34 (16.9R34)		142 D	
26	3001040153	8904365504413			420/85R34 (16.9R34) SB SG		152 D	
27	3001040098	8904365501252		36	460/85R34 (18.4R34)		147 D	
28	3001040086	8904365501405			320/85R36 (12.4R36)		128 D	
29	3001040148	8904365503195			320/85R36 (12.4R36)		148 D	
30	3001040089	8904365501412			340/85R36 (13.6R36)		132 D	
31	3001040124	8904365502952			320/85R38 (12.4R38)		143 D	
32	3001040123	8904365502945			340/85R38 (13.6R38)		133 D	
33	3001040096	8904365501238		38	420/85R38 (16.9R38)		144 D	
34	3001040099	8904365501269			460/85R38 (18.4R38)		149 D	
35	3001040181	8904365507780			460/85R38 (18.4R38) SB SG		149 D	
36	3001040250	8904365514658			460/85R38 (18.4R38) SB		167 D	
37	3001040101	8904365501191		42	520/85R38 (20.8R38)		155 D	
38	3001040103	8904365501429			520/85R42 (20.8R42)		157 D	
39	3001040115	8904365502471			520/85R42 (20.8R42)		165 D	
40	3001040216	8904365508671			520/85R42		169 D	
41	3001040105	8904365501436			46		520/85R46 (20.8R46)	158 D
42	3001040116	8904365502488					520/85R46 (20.8R46)	169 D



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001040198	8904365509135	Tractor 	20	VF 600/60R28 NRO SB	 VDR 2000 (TL) R-1W	160D
2	3001040194	8904365508756			VF 600/65R28 NRO SB		163 D
3	3001040208	8904365508763			VF 600/65R28 CFO SB		166 A8
4	3001040200	8904365509920		24	VF 540/65R30 NRO SB		161 D
5	3001040210	8904365509142			VF 540/65R30 CFO SB		161 A8
6	3001040193	8904365508749			VF 600/60R30 NRO SB		162 D
7	3001040231	8904365509586			VF 600/65R30 NRO SB		161 D
8	3001040197	8904365508794			VF 600/70R30 NRO SB		170 D




Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
9	3001040232	8904365509937		34	VF 380/85R34 SB	 VDR 2000 (TL) R-1W	149 D
10	3001040203	8904365509517			VF 420/85R34 SB		159 D
11	3001040223	8904365509562			VF 600/60R34 SB		160 D
12	3001040230	8904365509593			VF 600/70R34 NRO SB		170 D
13	3001040221	8904365509548			VF 650/60R34 NRO SB		168 D
14	3001040222	8904365509555			VF 650/65R34 NRO SB		170 D
15	3001040224	8904365509579			VF 710/60R34 NRO SB		173 D
16	3001040205	8904365509036			VF 380/80R38 SB		167 D
17	3001040204	8904365509159		VF 380/95R38 NRO SB	159D		
18	3001040233	8904365509951		VF 420/85R38 SB	155 D		
19	3001040195	8904365508770		VF 650/65R38 SB	180 D		
20	3001040190	8904365508725		VF 710/60R38 NRO SB	174 D		
21	3001040211	8904365509166		VF 710/70R38 NRO SB	181D		
22	3001040212	8904365509173		VF 710/70R38 CFO SB	183A8		
23	3001040192	8904365508183		VF 800/70R38 NRO SB SG	187D		
24	3001040209	8904365508718		VF 800/70R38 CFO SB	190 A8		
25	3001040196	8904365508787		VF 650/65R42 NRO SB	174 D		
26	3001040191	8904365508732		VF 710/60R42 NRO SB	176 D		
27	3001040213	8904365509180		VF 710/70R42 NRO SB	185D		
28	3001040214	8904365509197		VF 710/70R42 CFO SB	190A8		
29	3001040234	8904365509944		VF 900/60R42 NRO SB	189 D		
30	3001040225	8904365509531		VF 750/70R44 SB	186 D		
31	3001040206	8904365509203		VF380/85R46 NRO SB	162D		
32	3001040202	8904365509210		VF 480/80R46 SB	177D		
33	3001040201	8904365509524		VF 480/95R54 NRO SB	180 D		





Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001160001	8904365503270		16	240/70R16	 CDR 700 (TL) R-1	104 D
2	3001160002	8904365503287			260/70R16		109 D
3	3001160004	8904365503300			280/70R16		112 D
4	3001160010	8904365514597			320/65R16		117 D
5	3001160005	8904365503317		280/70R18	114 D		
6	3001160011	8904365514603		320/65R18	109 D		
7	3001160009	8904365503379		340/65R18	113 D		
8	3001160003	8904365503294		260/70R20	113 D		
9	3001160006	8904365503324		280/70R20	116 D		
10	3001160007	8904365503331		300/70R20	120 D		
11	3001160008	8904365503348		320/70R20	123 D		



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001040168	8904365506127		42	VF 580/85R42 SB	 VDR 900 (TL) R-1	183 D
2	3001040158	8904365505786		46	VF 380/90R46 SB		173 D
3	3001040167	8904365506134			VF 520/85R46 SB		173 D
4	3001040176	8904365506387		50	VF 320/90R50 SB		169 D
5	3001040177	8904365506394			VF 380/90R50 SB		175 D
6	3001040184	8904365508237			VF 380/105R50 SB		179D
7	3001040160	8904365507667			VF 420/95R50 SB		177 D
8	3001040162	8904365506141			VF 480/80R50 SB		179 D
9	3001040164	8904365507674		VF 480/95R50 SB	176 D		
10	3001040165	8904365505243		54	VF 320/90R54 SB		168 D
11	3001040238DF	8904365514825			VF 380/90R54		176 D
12	3001040166	8904365507681			VF 380/105R54 SB		180 D



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001040235	8904365509906	Tractor 	24	210/90R24 (8.3R24)	 TDR 900 (TL) R-1	107 A8/B
2	3001040236	8904365509913		28	210/95R28 (8.3R28)		116 A8/B
3	3001040175	8904365506370		30	420/90R30		147A8/B
4	3001040207	8904365508275		32	210/95R32 (8.3R32)		116D/119A8
5	3001040131	8904365503430			230/95R32 (9.5R32)		128 D
6	3001040133	8904365503447			270/95R32 (11.2R32)		136 D
7	3001040185	8904365508152		34	320/85R34 (12.4R34)		141D
8	3001040132	8904365503508		36	230/95R36 (9.5R36)		130 D
9	3001040134	8904365503515			270/95R36 (11.2R36)		139D
10	3001040135	8904365503522		38	270/95R38 (11.2R38)		140 D
11	3001040171	8904365506899			380/95R38		150A8/147D
12	3001040186	8904365508190		40	230/95R40 (9.5R40)		132 D/135 A8
13	3001040247	8904365514665		42	230/95R42 (9.5R42)		133 D
14	3001040136	8904365503539			270/95R42 (11.2R42)		139 D
15	3001040187	8904365508169			320/80R42 (12.4R42)		141 A8/B
16	3001040188	8904365508176		44	320/90R42 (12.4R42)		144 D/147 A8
17	3001040139	8904365503560			230/95R44 (9.5R44)		134 D
18	3001040137	8904365503546		46	270/95R44 (11.2R44)		142 D
19	3001040142	8904365503591			300/95R46 (12.4R46)		148 D
20	3001040144	8904365503614			320/90R46 (12.4R46)		148 D
21	3001040217	8904365509470			340/85R46 (13.6R46)		150 D
22	3001040149	8904365504383		48	380/90R46 (14.9R46) SB		159 D
23	3001040150	8904365504352			380/90R46 (14.9R46) SB		173 D
24	3001040140	8904365503577		50	230/95R48 (9.5R48)		136 D
25	3001040138	8904365503553			270/95R48 (11.2R48)		144 D
26	3001040146	8904365503638			340/85R48 (13.6R48)		151 D
27	3001040145	8904365503621		52	320/90R50 (12.4R50)		150 D
28	3001040173	8904365506882			480/95R50		167A8/164D
29	3001040143	8904365503607		54	300/95R52 (12.4R52) SB		156 D
30	3001040141	8904365503584		270/95R54 (11.2R54) SB	156 D		



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001040170	8904365506905	Tractor Sprayer 	46	VF 380/90R46 SB	 VDR 901 (TL) R-1	173D



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3002130026	8904365507872	Tractor Telehandler Backhoe loader   	16	250/75R16 SB	 MDR 1000 (TL) IND	120 G
2	3002130023	8904365506837		18	340/80R18 (12.5R18) SB		143A8/138D
3	3002130029	8904365514672		20	340/80R20(12.5R20) SB		144A8/140D
4	3002130020	8904365506820			360/80R20 (13.6R20) SB		147A8/143D
5	3002130030DF	8904365514795			400/70R20 (16.0/70R20) SB		149A8/144D
6	3002130021	8904365506868		24	360/80R24 (13.6R24) SB		143A8/138D
7	3002130031	8904365511626			400/70R24 (16.0/70 R24) SB		152A8/146D
8	3002130008	8904365506356			400/80R24 (14.9R24) SB		149A8/144D
9	3002130001	8904365506295			440/80R24 (16.9R24) SB		154A8/149D
10	3002130032	8904365514702		26	460/70R24(17.5LR24) SB		159A8/154D
11	3002130033	8904365511633			500/70R24 (19.5LR24) SB		164A8/159D
12	3002130034	8904365514696			540/70R24 SB		168A8/162D
13	3002130035	8904365514689		28	480/80R26(18.4R26) SB		160A8/155D
14	3002130036DF	8904365514801			580/70R26 SB		158A8/153D
15	3002130009	8904365506332		30	400/80R28 (14.9R28) SB		151A8/146D
16	3002130002	8904365506301			440/80R28 (16.9R28)SB		156A8/151D
17	3002130010	8904365506349			480/65R28 SB		154A8/149D



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
18	3002130011	8904365506363	Tractor Telehandler Backhoe loader   	28	540/65R28 SB	 MDR 1000 (TL) IND	160A8/155D
19	3002130003	8904365506318		30	440/80R30 (16.9R30) SB		157A8/153D
20	3002130005	8904365506813			480/80R30 (18.4R30) SB		162A8/157D
21	3002130012	8904365506783		30	540/65R30 SB		161A8/156D
22	3002130018	8904365506806			600/70R30 SB		171A8/166D
23	3002130004	8904365506325		34	440/80R34 (16.9R34) SB		159A8/155D
24	3002130006	8904365506271			480/80R34 (18.4R34) SB		164A8/159D
25	3002130007	8904365506288		38	480/80R38 (18.4R38) SB		166A8/161D
26	3002130019	8904365507469			540/80R38 (20.8R38) SB		172A8/167D
27	3002130013	8904365506790			600/65R38 SB		170A8/166D
28	3002130024	8904365506769			650/65R38 SB		175A8/170D
29	3002130025	8904365506776			650/65R38 SB SG		175A8/170D
30	3002130016	8904365507476		42	650/85R38 SB		183A8/178D
31	3002130027	8904365509432			620/80R42 SB		181A8/177D
32	3002130014	8904365506844			650/65R42 SB		176A8/171D
33	3002130015	8904365506851			710/70R42 SB		185A8/180D



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001090002	8904365503409	Harvester 	26	23.1-26	 HRB 210 (TL) R-1	16 / 159 A6
2	3001090001	8904365503966		32	30.5L-32		18 / 170 A8



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001100008	8904365509845	Harvester 	24	500/85R24 (IMP) SB	 HRR 200 (TL) R-1	171 A8-FR / 158 A8-DW
2	3001100001	8904365505588		26	620/75R26 SB		167A8
3	3001100009	8904365509852		30	500/85R30 (IMP) SB		176 A8-FR / 164 A8-DW
4	3001100005	8904365509890			620/75R30 CHO SB		169 A8
5	3001100002	8904365505595		32	650/75R32 SB		172A8
6	3001100006	8904365509876			680/85R32 SB		179 A8
7	3001100003	8904365505601			800/65R32 SB		181A8
8	3001100007	8904365509883			800/70R32 SB		175 A8
9	3001100004	8904365505618			900/60R32 SB		191D
10	3001100010	8904365509869		34	710/75R34 CHO SB		184 A8



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001050085	8904365506608	Implement 	10	7.50-10	 IMB 160 (TL) I-1	12 / 111A8 FR / 99A8 DW
2	3001050102	8904365508480		12	10.0/80-12		8 / 116 A8 FR / 104 A8 DW
3	3001050062	8904365503188			10.0/80-12		10 / 121 A8 / 109 A8
4	3001050001	8904365501368		15.3	10.0/75-15.3 (260/70-15.3)		10 / 123 A8 / 111 A8
5	3001050103	8904365508497			10.0/75-15.3		12 / 126 A8 FR / 114 A8 DW
6	3001050002	8904365500552			10.0/75-15.3 (260/70-15.3)		14 / 130 A8 / 118 A8
7	3001050087	8904365505687			10.0/75-15.3		18 / 135A8 FR 122A8 DW
8	3001050045	8904365502501			11.5/80-15.3		10 / 131 A8 / 119 A8
9	3001050104	8904365508503			11.5/80-15.3		12 / 135 A8 FR / 123 A8 DW
10	3001050003	8904365500569			11.5/80-15.3		14 / 139 A8 / 126 A8
11	3001050004	8904365501092			11.5/80-15.3		16 / 142 A8 / 128 A8
12	3001050005	8904365501108			11.5/80-15.3		18 / 144A8 FR / 132A8 DW
13	3001050006	8904365500576			12.5/80-15.3 (300/80-15.3)		14 / 142 A8 / 129 A8
14	3001050050	8904365502709		12.5/80-15.3 (300/80-15.3)	18 / 151 A8 / 139 A8		
15	3001050082	8904365506639		15.5	400/60-15.5		16 / 146A8 FR / 133 A8 DW
16	3001050079	8904365504307		16	10.5/65-16		14 / 130A8 FR / 118A8 DW



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001050060	8904365503256	 Implement	16	13.0/75-16	 IMB 160 (TL) I-1	12 / 138 A8
2	3001050093	8904365507384			14.0/65-16 (360/65-16)		14 / 14PR/142 A8 FR/129 A8 DW
3	3001050080	8904365506615		17	15.0/55-17		10 / 134A8 FR / 122A8 DW
4	3001050081	8904365506622			15.0/55-17		14 / 141A8 FR / 128A8 DW
5	3001050083	8904365506646			19.0/45-17		14 / 144A8 FR / 131A8 DW
6	3001050084	8904365506653			500/50-17		14 / 149A8 FR / 136A8 DW
7	3001050101	8904365508541			500/50-17		18 / 154 A8 FR / 142 A8 DW
8	3001050061	8904365503263		18	10.5/80-18		14 / 138 A8
9	3001050032	8904365500996			12.5/80-18		16 / 148 A8 / 135 A8
10	3001050008	8904365500972			13.0/65-18		16 / 144 A8 / 131 A8
11	3001050009	8904365500989			15.0/70-18		16 / 151 A8 / 139 A8



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001050011	8904365500897	 Implement	15.3	260/70-15.3	 IMB 161 (TL) I-2	10 / 122 A8 110 A8
2	3001050012	8904365502181			260/70-15.3		14 / 131 A8 119 A8
3	3001050059	8904365503249			300/80-15.3		14 / 139 A8
4	3001050046	8904365502518		15.5	400/60-15.5		14 / 145 A8 132 A8
5	3001050014	8904365500927			400/60-15.5		16 / 148 A8 135 A8
6	3001050047	8904365502525			400/60-15.5		18 / 149 A8 136 A8
7	3001050015	8904365500934		16	340/55-16 (13.0/55-16)		12 / 133 A8 121 A8
8	3001050109	8904365509623			340/55-16 (13.0/55-16)		14 / 136 A8 124A8
9	3001050041	8904365501979			340/55-16 (13.0/55-16)		18 / 140 A8 128 A8
10	3001050044	8904365502143		17	380/55-17 (15.0/55-17)		10 / 134 A8 122 A8
11	3001050016	8904365500941			380/55-17 (15.0/55-17)		14 / 141 A8 128 A8
12	3001050042	8904365501986			380/55-17 (15.0/55-17)		18 / 146 A8 134 A8
13	3001050017	8904365500958			480/45-17 (19.0/45-17)		14 / 146 A8 134 A8
14	3001050043	8904365501993		480/45-17 (19.0/45-17)	18 / 149 A8 136 A8		
15	3001050018	8904365501597		20	500/50-17		10 / 143 A8 131 A8
16	3001050019	8904365500965			500/50-17		14 / 149 A8 137 A8
17	3001050020	8904365502006			500/50-17		18 / 154 A8 142 A8
18	3001050054	8904365502976			400/70-20 (16.0/70-20)		16 / 156 A8 144 A8
19	3001050021	8904365501580		20	500/55-20		10 / 150 A8 138 A8
20	3001050022	8904365501009			500/55-20		12 / 155 A8 143 A8



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001050066	8904365504093	 Implement	12	6.5/80-12	 IMB 162 (TL) I-2	6 / 93A8 FR 80A8 DW
2	3001050065	8904365504086			7.00-12		6 / 95A8 FR 83A8 DW
3	3001050112DF	8904365514870		13	6.5/80-13		6 / 95/82 A8
4	3001050068	8904365504116			5.00-15		6 / 88A8 FR 75A8 DW
5	3001050113	8904365514566		15	6.5/80-15		6 / 98A8 FR 86A8 DW
6	3001050069	8904365504079			7.5L-15		8 / 113A8 FR 100A8 DW
7	3001050023	8904365500903		15.3	10.0/75-15.3		10 / 123 A8 111 A8
8	3001050107	8904365509111			10.0/75-15.3 HLV		10 HLV / 129 A8 123 A8
9	3001050051	8904365502716			10.0/75-15.3		14 / 130 A8 118 A8
10	3001050052	8904365502723			10.0/75-15.3		18 / 135 A8 123 A8
11	3001050024	8904365500910			11.5/80-15.3		12 / 135 A8 123 A8
12	3001050053	8904365502730			11.5/80-15.3		14 / 139 A8 126 A8
13	3001050108	8904365509128			11.5/80-15.3 HLV		14 HLV / 145 A8 139 A8
14	3001050067	8904365504109		16	6.00-16		8 / 103 A8 91 A8
15	3001050089	8904365506660			6.50-16		8 / 105A8 FR 93A8 DW
16	3001050070	8904365504161			7.50-16		8 / 112A8 FR 99A8 DW
17	3001050048	8904365502556		17	19.0/45-17		10 / 138 A8 125 A8
18	3001050088	8904365505731			19.0/45-17		16 / 146A8 FR 133A8 DW
19	3001050072	8904365504154		18	7.50-18		8 / 114A8 FR 101A8 DW
20	3001050073	8904365504123			10.5/80-18		10 / 131A8 FR 119A8 DW
21	3001050074	8904365504130			12.5/80-18		12 / 142A8 FR 129A8 DW
22	3001050071	8904365504147			7.50-20		8 / 116A8 FR 103A8 DW



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001050039	8904365501856	Implement 	14	9.5L-14 SL	 IMB 163 (TL) I-1	8 / 111 B
2	3001050090	8904365506677		15	6.70-15 SL		6 / 97 B
3	3001050040	8904365501863		15	7.60-15 SL		10 / 110 B
4	3001050025	8904365501443		15	9.5L-15 SL		8 / 112 B
5	3001050026	8904365501955		15	9.5L-15 SL		12 / 121 B
6	3001050027	8904365501450		15	11L-15 SL		8 / 113 B
7	3001050037	8904365501962		15	11L-15 SL		12 / 121 B
8	3001050173	8904365514986		15	11L-15 SL		16 / 128 B
9	3001050029	8904365501603		15	12.5L-15 SL		12 / 127 B
10	3001050038	8904365501474		16	12.5L-16 SL		14 / 130 B
11	3001050100	8904365508985		16.1	14L-16.1SL		14 / 138 B
12	3001050063	8904365503485		16.1	16.5L-16.1 SL		12 / 141B
13	3001050064	8904365503492		16.1	21.5L-16.1 SL		14 / 152 B
14	3001050111	8904365509449		24	11.25-24 SL		12 / 138 B
15	3001050110	8904365509456		28	11.25-28 SL		12 / 139 B



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001050055	8904365503911	Implement 	14.5	200/60-14.5	 IMB 164 (TL) IMP	10 / 106 A8
2	3001050105	8904365508510			200/60-14.5		14 / 113 A8
3	3001050049	8904365503904			200/60-14.5		14 / 113 A8
4	3001050056	8904365503928			250/65-14.5		12 / 119 A8



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001050078	8904365504239	Implement 	12	23x8.50-12	 IMB 165 (TL) IMP	6 / 89 A6
2	3001050077	8904365504192			26x12.00-12		8 / 112 A6
3	3001050106	8904365508992			26x12.00-12		10 / 117A6
4	3001050076	8904365504178		15	29x12.50-15		6 / 98 B
5	3001050075	8904365504185			31x15.50-15		10 121 B



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	LISI
1	3001050092	8904365507407	Implement 	12	320/60-12	 IMB 166 (TL) IMP	132A8 FR 120 A8 DW
2	3001050094	8904365507391		15.5	280/60-15.5		128 A8 FR 116 A8 DW



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001050097	8904365508800	Implement 	15	9.5L-15 FI	 IMB 168 (TL) I-1	12 / 123 J
2	3001050098	8904365508817			11L-15 FI		12 / 128 J
3	3001050099	8904365508824			12.5L-15 FI		12 / 134 J



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001140001	8904365505038	Tractor Trailer 	16	9.00-16	 BOSS TR 20 (TT)	16/137 A6
2	3001140002	8904365501870			9.00-16		18/138 A6
3	3001140001	8904365505038			9.00-16		16/137 A6
4	3001140002	8904365501870			9.00-16		18/138 A6



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001180007	8904365508282	Tractor Trailer 	20	10.00-20	 BOSS TR 21 (TT)	18




Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001140003	8904365514757	Tractor Trailer 	20	10.00-20	 BOSS TR 22 (TT)	18




Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001060014	8904365514634	Implement 	17	380/55R17 (15.0/55R17)	 IMR 140 (TL) IMP	138A8/125A8
2	3001060005	8904365505472		15	31X15.5R15		122B
3	3001060006	8904365505489		15	33X15.5R15		126B
4	3001060003	8904365505496		17	425/55R17		134D
5	3001060004	8904365505502		17	500/50R17 SB		145D




Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	LISI
1	3001060009DF	8904365514856	Implement 	15	VF 265/85R15 SB, SG	 VIR 2500 (TL) IMP	129 D
2	3001060010DF	8904365514863			VF 340/60R15 SB, SG		129 D
3	3001080028	8904365507803			VF 280/70R15 SB SG		140 D
4	3001060008	8904365509340		16.5	VF 380/70R15 SBSG		152D
5	3001080029	8904365507810			VF 320/70R15 SB SG		145 D
6	3001080030	8904365507827			VF 380/55R16.5 SB SG		148 D
7	3001080031	8904365507834			VF 380/60R16.5 SB SG		147 D
8	3001060011DF	8904365514832			VF 480/45R17 SB, SG		155 D
9	3001060012DF	8904365514849			VF 500/50R17 SB, SG		156 D



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	LISI
1	3001070025	8904365507414	Implement 	12	300/65-12	 FTB 190 (TL) I-3	8 / 122A8 FR
2	3001070001	8904365501559		15.5	400/60-15.5		14 / 145 A8 / 141B FR
3	3001070007	8904365501016		400/60-15.5	16 / 148 A8 / 144B FR		
4	3001070021	8904365505724		400/60-15.5	18 / 151A8 / 147B FR		
5	3001070028	8904365507421		17	480/45-17		16 / 150A8 FR
6	3001070010	8904365502563		500/50-17	14 / 149 A8 145 B		
7	3001070014	8904365502662		500/50-17	18 / 157 A8 154 B		
8	3001070018	8904365503416		22.5	400/55-22.5		14 / 150 A8 146 B
9	3001070024	8904365504949			400/55-22.5		16 / 152 A8 / 149 B FR
10	3001070002	8904365501023			500/45-22.5		16 / 154 A8 / 150 B
11	3001070022	8904365503201			500/50-22.5		20 / 163A8 FR 159B FR
12	3001070003	8904365501030			500/60-22.5		16 / 163 A8 159 B
13	3001070020	8904365505670			500/60-22.5		20 / 170 A8 167 B
14	3001070004	8904365501047			550/45-22.5		16 / 159 A8 156 B
15	3001070008	8904365502136			550/45-22.5		20 / 166 A8 162 B
16	3001070005	8904365501054		550/60-22.5	16 / 166 A8 162 B		



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	LISI
17	3001070019	8904365503959	Flotation 	22.5	550/60-22.5 V	 FTB 190 (TL) I-3	16 / 166 A8 162 B
18	3001070009	8904365502174			550/60-22.5		20 / 171 A8 167 B
19	3001070038	8904365514580			560/60-22.5 HD		16 / 167 A8 163 B FR
20	3001070006	8904365501061			600/50-22.5		16 / 165 A8 161 B
21	3001070015	8904365502778			600/55-22.5		16 / 169 A8 166 B
22	3001070031	8904365514559			600/50-22.5 HD		20 / 171 A8 168 B FR
23	3001070012	8904365502594			700/40-22.5		16 / 166 A8 162 B
24	3001070011	8904365502587			700/50-22.5		16 / 174 A8 170 B
25	3001070013	8904365502600		26.5	600/55-26.5		16 / 170 A8 167 B
26	3001070016	8904365502785			700/50-26.5		16 / 174 A8 170 B
27	3001070017	8904365502792			800/45-26.5		16 / 177 A8 173 B



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001080036	8904365509739	Flotation  	22.5	560/60R22.5 HD SB	 FCR 185 (TL) IMP	169 D
2	3001080034	8904365509333		26.5	600/55R26.5 HD SB		173D
3	3001080035	8904365509722		650/55R26.5 HD SB	178 D		
4	3001080049	8904365509609		30.5	600/60R30.5 HD SB		178 D



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001080051	8904365514627	Flotation  	17	480/45R17 SB	 FTR 170 (TL) IMP	140 D
2	3001080019	8904365503478			500/50R17 SB		149 D
3	3001080050	8904365514610			520/50R17 SB		151 D
4	3001080042	8904365509784		17.5	400/45R17.5 SB		139 D
5	3001080023	8904365506158		22.5	500/60R22.5 SB		155 D
6	3001080011	8904365503089			560/45R22.5 SB		152 D
7	3001080010	8904365503058			560/60R22.5 SB		165 D
8	3001080037	8904365509821			580/65R22.5 SB		166 D
9	3001080012	8904365503423			600/50R22.5 SB		159 D
10	3001080033	8904365509326			600/50R22.5 SB		167D
11	3001080052DF	8904365514764			600/55R22.5 (SB)		162 D
12	3001080026	8904365506165			620/40R22.5 SB		154 D
13	3001080045	8904365509746			650/50R22.5 SB		163 D
14	3001080046	8904365509753			710/40R22.5 SB		165 D
15	3001080041	8904365509838		710/45R22.5 SB	165 D		
16	3001080016	8904365503454		26.5	750/45R26.5 SB		170 D
17	3001080025	8904365506172			650/60R26.5 SB		180 D
18	3001080038	8904365509791			650/65R26.5 SB		174 D
19	3001080039	8904365509807			650/65R26.5 SB		181 D
20	3001080015	8904365503072			710/50R26.5 SB		170 D
21	3001080013	8904365503119			600/55R26.5 SB		165 D
22	3001080014	8904365503065			650/55R26.5 SB		170 D
23	3001080024	8904365505793			650/55R26.5 SB		178 D
24	3001080022	8904365505854		800/45R26.5 SB	174 D		
25	3001080040	8904365509814		30.5	600/60R30.5 SB		173 D
26	3001080017	8904365503461			710/50R30.5 SB		176 D
27	3001080020	8904365504314			750/60R30.5 SB		181 D
28	3001080032	8904365509500			750/60R30.5 WS SB		181 D
29	3001080044	8904365509760			800/45R30.5 SB		176 D
30	3001080021	8904365505861			850/50R30.5 SB		182 D
31	3001080043	8904365509777			32		800/60R32 SB



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001080065DF	8904365514771	Flotation  	22.5	560/45R22.5 SB	 FTR 176 (TL) IMP	152 D
2	3001080066DF	8904365514788			560/60R22.5 SB		170 D



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001150001	8904365502327	Irrigation 	24	11.2-24	 IRB 260 (TL) R-1	6 / 110 A8
2	3001150002	8904365502334			14.9-24		8 / 128 A8
3	3001150003	8904365502341		38	11.2-38		6 / 114 A8



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001180003	8904365505748	Multi-Purpose 	26	23.1-26 DB	 SPB 260 (TL) R-3	18 / 170 A8
2	3001180001	8904365504468		30	620/75-30 (23.1-30) DB		16 / 161 A6
3	3001180004	8904365506189			620/75-30 (23.1-30) DB		18 / 164 A6
4	3001180002	8904365504727		32	650/75-32 (24.5-32) DB		16 / 164 A6
5	3001180005	8904365504901			650/75-32 (24.5-32) DB		18 / 167 A6



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001060007	8904365505571	Multi-Purpose 	18	355/60R18 SB	 MPR 390 (TL) MPT	16 / 142J



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3001200022	8904365514719	Lawn & Garden 	10	215/45R10 (18X8.50R10)	 UTR 240 (TL) R-3+	80A8/B
2	3001200016	8904365507544		12	220/55R12		82 A8/B
3	3001200001	8904365507612			240/60R12		89 A8/B
4	3001200021	8904365509043		14	315/55R12(26X12.00R12)		85 A8/B
5	3001200023DF	8904365514917			315/55R12(26X12.00R12)		102A8/B
6	3001200019	8904365508701		15	215/65R14(25X8.50R14)		90 A8/B
7	3001200025	8904365511596			220/55R14		105 A8/B
8	3001200024	8904365514726		16	215/70R15 (27X8.50R15)		90A8/B
9	3001200002	8904365507599			200/60R15		83 A8/B
10	3001200003	8904365507575		17.5	200/65R16		94 A8/B
11	3001200004	8904365507582			200/70R16		94 A8/B
12	3001200005	8904365507605			240/70R16		104 A8/B
13	3001200008	8904365507513			260/70R16		109 A8/B
14	3001200015	8904365507506			280/70R16		112 A8/B
15	3001200018	8904365508695			16.5		305/70R16.5(12R16.5)
16	3001200020	8904365509050		17.5	355/65R17.5(14R17.5)		130 A8/B
17	3001200009	8904365507568		18	260/70R18		114 A8/B
18	3001200014	8904365507490			280/70R18		114 A8/B
19	3001200017	8904365508688		19.5	385/65R19.5		130 A8/B
20	3001200006	8904365507629		20	300/70R20		110 A8/B
21	3001200010	8904365507636			320/70R20		113 A8/B
22	3001200012	8904365507520			380/70R20		122 A8/B
23	3001200013	8904365507537			24		380/70R24
24	3001200011	8904365507643		420/70R24			130 A8/B



Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3005040001	8904365502549	Agro Forestry 	10	18.4-26	 AFB 820 (TL) R-1	16 / 156 A8

Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3005040002	8904365504925	Agro Forestry 	10	12.4-24 (SB, CR)	 AFB 821 (TL) R-1	16 / 130 A8
2	3005040003	8904365504932		12	13.6-24 (SB, CR)		16 / 136 A8
3	3005040007	8904365504888		14.9-24 (SB, CR)	16 / 140 A8		
4	3005040004	8904365504857		16.9-30 (SB, CR)	16 / 149 A8		
5	3005040006	8904365504871		14	18.4-30 (SB, CR)		16 / 151 A8
6	3005040005	8904365504864			16.9-34 (SB, CR)		16 / 151 A8
7	3005040008	8904365504895			18.4-34 (SB, CR)		16 / 155 A8
8	3005040014	8904365514979			18.4-38 (SB, CR)		14 / 155 A8

Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3005010009	8904365507360	Log Skidder 	10	18.4-26 Steel Belted	 LSB 780 (TL) LS-2	16 / 152 A6
2	3005010001	8904365505663		12	23.1-26 Steel Belted		16 / 160 A6 172 A2
3	3005010002	8904365506400		28L-26 (SB, DB)	20 / 165 A6		
4	3005010010	8904365508657		28L-26 (SB, DB)	26 / 173 A6		
5	3005010008	8904365507377		14	24.5-32 (SB, DB)		20 / 169 A6 181A2
6	3005010007	8904365506486			30.5L-32 (SB, DB)		20 / 170 A6
7	3005010003	8904365506417			30.5L-32 (SB, DB)		26 / 176 A6
8	3005010005	8904365506424			30.5L-32 (SB, DB)		32 / 180 A6
9	3005010004	8904365507346			35.5L-32 (SB, DB)		26 / 183 A6
10	3005010006	8904365507353			35.5L-32 (SB, DB)		32 / 187 A6


Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3005060008	8904365508046	Forestry Forwarder 	22.5	710/40-22.5 SB	 FFB 840 (TL) LS-2	20 / 161A8 HT -161A2 / LT -168A2
2	3005060005	8904365508077		26.5	600/55-26.5 SB		20 / 165A8 HT -165A2 / LT -172A2
3	3005060006	8904365508053		710/45-26.5 SB	20 / 168A8 HT -168A2 / LT -175A2		
4	3005060011	8904365514443		710/55-26.5 SB	24 / 179A8 HT -179 A2 / LT- 186 A2		
5	3005060007	8904365508060		800/40-26.5 SB	20 / 170A8 HT -170A2 / LT -177A2		

Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3005060013DF	8904365515013	Forestry Forwarder 	22.5	710/40-22.5 SB	 FFB 841 (TL) LS-2	24 / 167 A8

Sr. No	SKU Code	EAN Number	Application	Rim Dia.	Tyre Size	Pattern	PR / LISI
1	3005060026DF	8904365515006	Forestry Forwarder 	15.5	400/60-15.5 SB	 FFB 843 (TL) I-3	20 / 152 A8 / 148 B 140 A8 / 135 B

DRIVE ON **7** ***** **YEAR** **WARRANTY**

On Agriculture Radial Tires

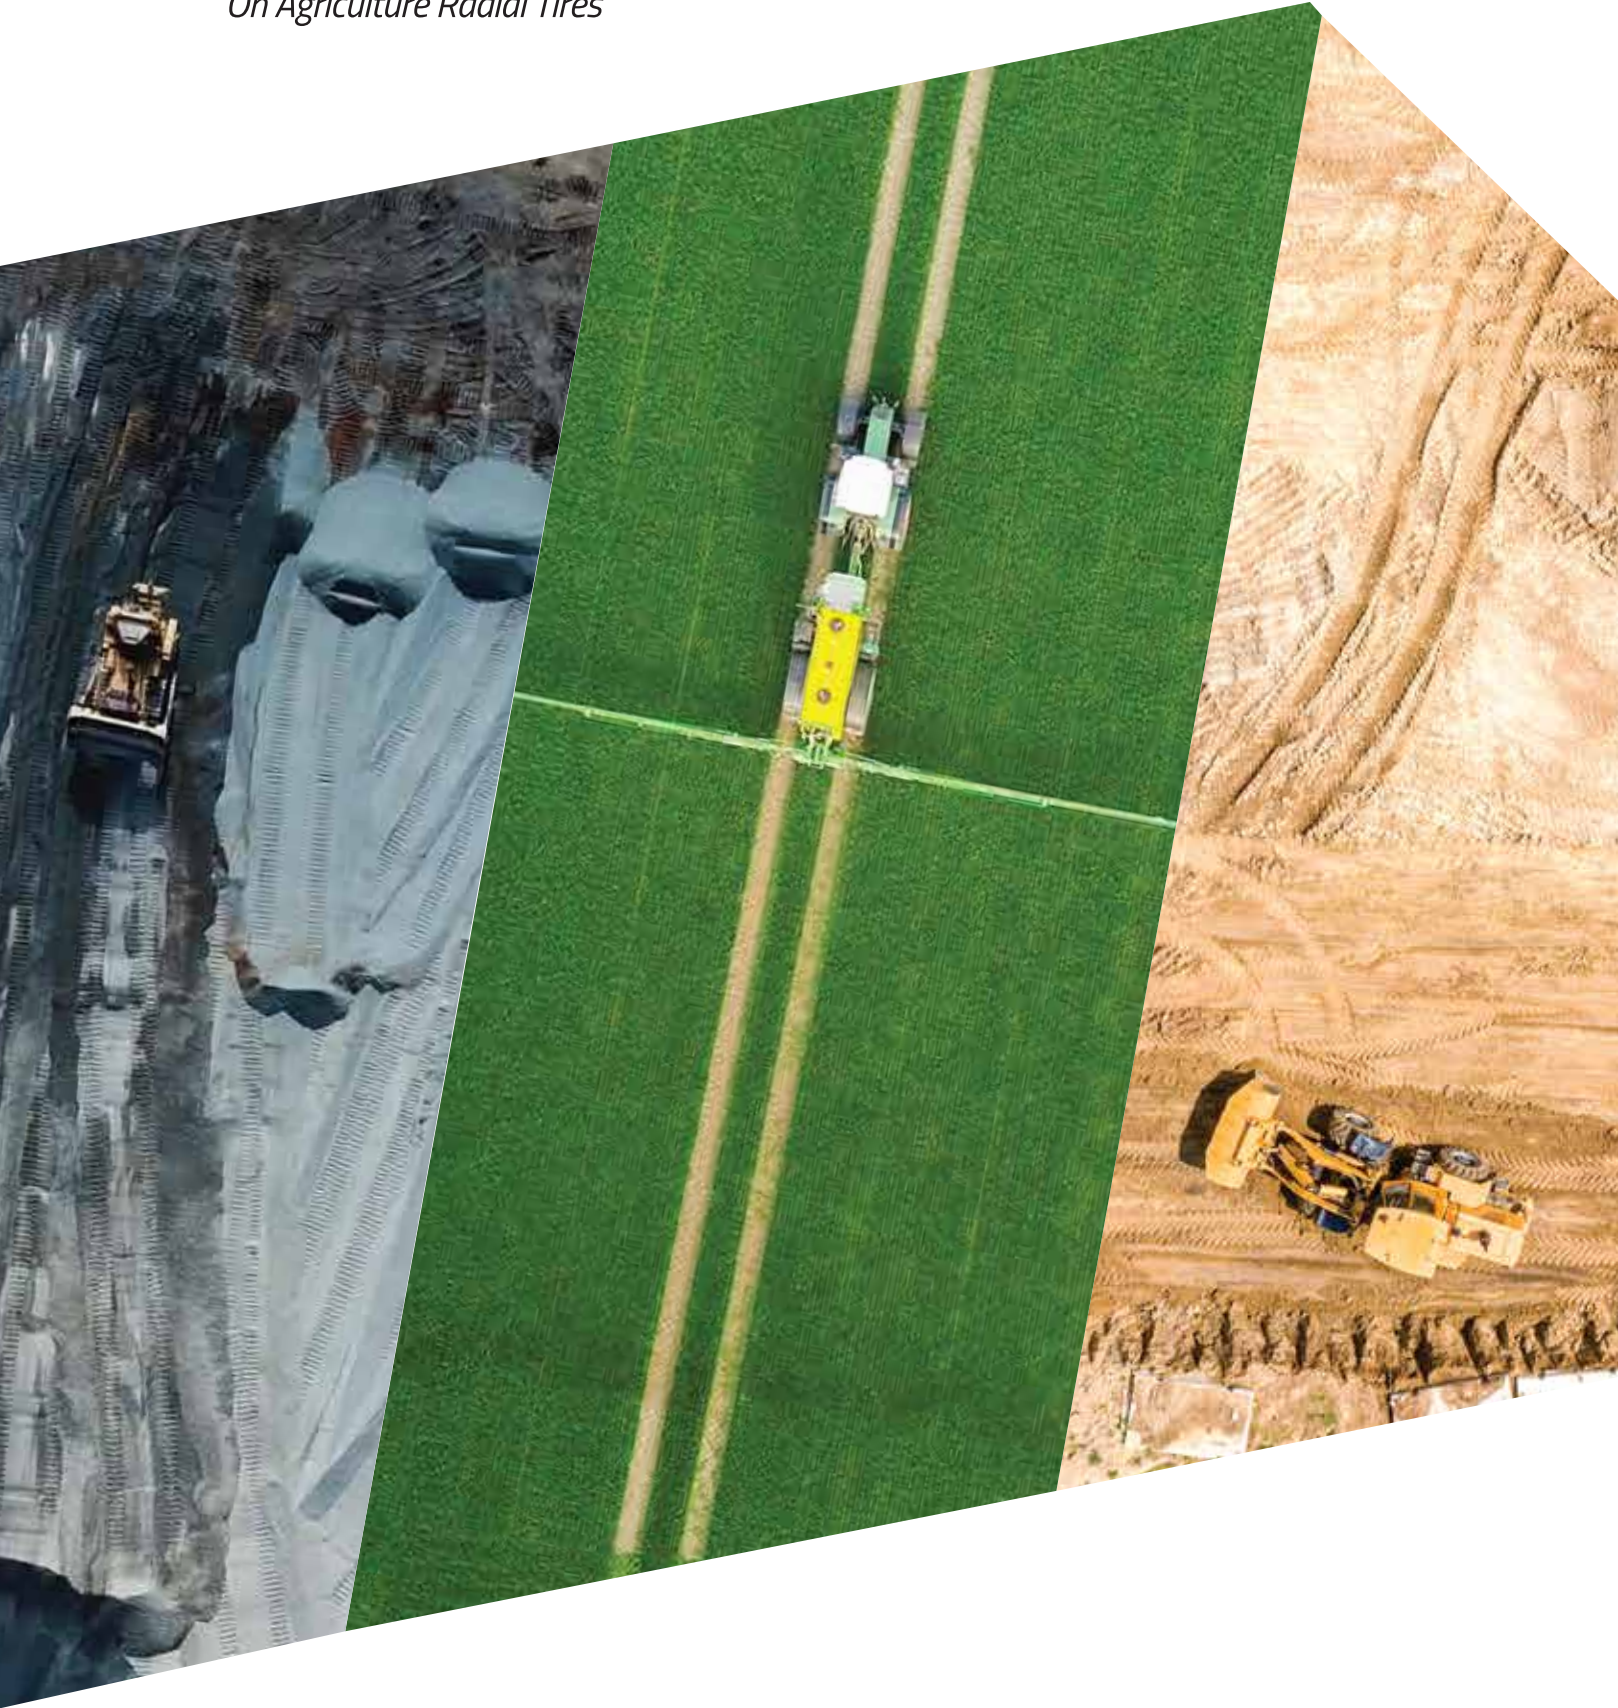

 **ASCENSO**
never stop rising

Ascenso International Warranty Policy for Agriculture Radial Tires


This limited warranty covers ASCENSO branded Agriculture Radial tires that are sold in the USA and Canada Markets, are manufactured on or after April 1, 2020 and meet the following criteria:

1. Tires that bear the name ASCENSO and the complete week codes, molded on the sidewall.
2. Products with at least 2 (32nds) of tread remaining.
3. The replacement percentage will be multiplied by the original purchase price of the tire (excluding any taxes or duties) to determine the amount of reimbursement to be applied. Such reimbursement must be applied towards the purchase price of the replacement tire in effect at the time of adjustment.
4. Tires that are not more than 7 years old. The years will be counted from the date of invoice (dealer's invoice to the end user) or from the month of production in case of non-availability of an invoice.
5. Tires that were used strictly in accordance with the recommendations of the applicable vehicle manufacturer and ASCENSO standard maintenance and safety recommendations, in normal agricultural service.
6. Defects established by ASCENSO personnel will only qualify for warranty and it will cease once the tires are repaired.
7. The customer will be responsible for all other charges including taxes, mounting, field service and other charges such as applicable freight.
8. The age of a tire will be determined by a sales invoice showing the date of purchase. If a proof of purchase is not available, the age of a tire will be determined from the date of manufacture, molded on the sidewall.
9. This warranty coverage is for tires used in normal applications and any use outside specifications automatically voids this warranty.
10. All adjusted tires will be disabled, and their week codes will be removed. The customer will be responsible for disposal of the adjusted tires.
11. If a tire in normal agricultural services becomes unserviceable within the time or tread-wear periods shown below, it will be replaced with a comparable new ASCENSO tire according annexure A mentioned below

Scope Of Warranty

Annexure-A

The limited warranty is available within certain age limits i.e. within certain number of month(s) from production or sale. Any adjustment will be based on the remaining tread depth or services life whichever is less, this warranty policy covers product described under the eligibility criteria.

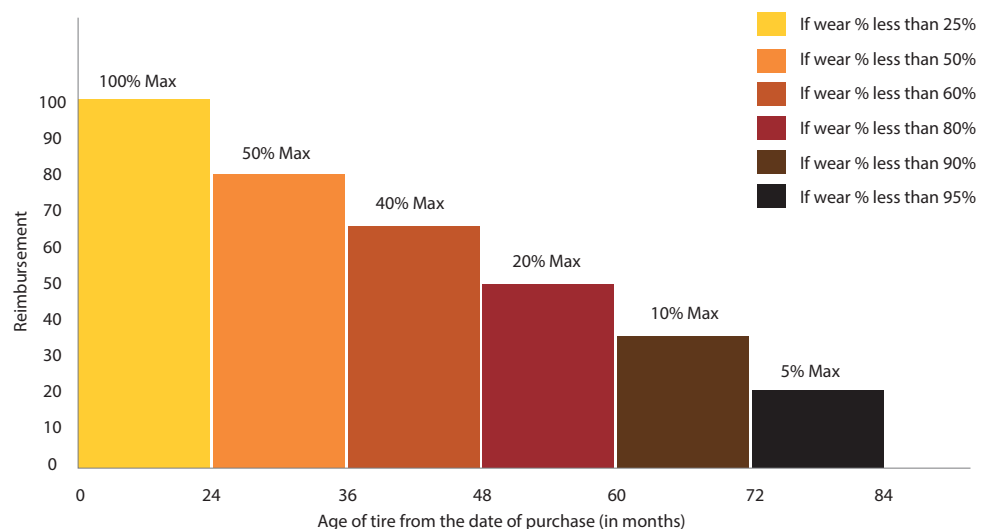

* If a tire's purchase month or service cannot be accurately determined, then the date of manufacture will be considered for replacement.

* Agriculture Tires include Tractor Radial, Flotation Radial and Agro Industrial Radials.

* If the tire wear is more than above mentioned for each period, % credit will be calculated on pro-rata basis of the remaining tread depth.

Field Hazard / Stubble Damage Policy

For stubble damage claims, the percentage of allowance will be based on the manufacture's evaluation of the fulfillment of the customer's obligations for stubble damage warranty as set out below. If a Tire running under normal agricultural service becomes completely unserviceable and non-repairable due to field hazard or stubble damage, the Customer will receive a replacement credit towards the purchase of a replacement tire equal to the % shown below:

Period	Tire Tread Depth Remaining	% Credit Allowance
up to 12 months	75 % or more	Up to 75%
up to 24 months	50 % or more	Up to 50%
up to 36 months	25% or more	Up to 25%
No credit allowed after 36 months or less than 25% tread depth remaining		

Limitations

1. This limited warranty is applicable to the original purchaser and is not assignable to any subsequent owner.
2. Any tire, no matter how well manufactured, may fail in service or become unserviceable due to conditions beyond our control.
3. This limited warranty is under no circumstances a representation that a tire failure cannot occur.
4. No ASCENSO dealer, agent, or representative has the authority to make any representation, promise, or agreement which, in any way, varies, alters or enhances the terms of this warranty.
5. This warranty ceases once the tires are repaired.

Failures Not Covered

This warranty does not cover:

No credit allowed after 36 months or less than 25% tread depth remaining

1. Damage resulting from misuse, improper mounting, misapplication, use of non-approved rims, improper inflation, improper repair, overloading, running on a flat tire, misalignment or imbalance of wheels/rims, defective brakes or shock absorbers, abuse, wilful damage, oil, chemical reaction, fire or other externally-generated heat, use of studs, water or other materials trapped inside the tire.
2. Claims for irregular or rapid tread-wear
3. Full service rendered, repaired or retread tires
4. Any modifications to the tire (like added buttress shoulders, retreading, regrooving)

Any material added to the tire (like tire fill, sealer, balancer) is not covered by this limited warranty and will not be compensated for under the provisions of this warranty.




Disclaimer & right to change the policy

When detailed information and/or decisions are required in order to implement/ interpret this policy, Ascenso can add and/or change such detailed information and/or decisions to this policy as "conditions" at any time. Ascenso reserves the right to change policy term and conditions from time to time at its sole direction.

DRIVE ON **5**★**YEAR** WARRANTY

On all BiasTires

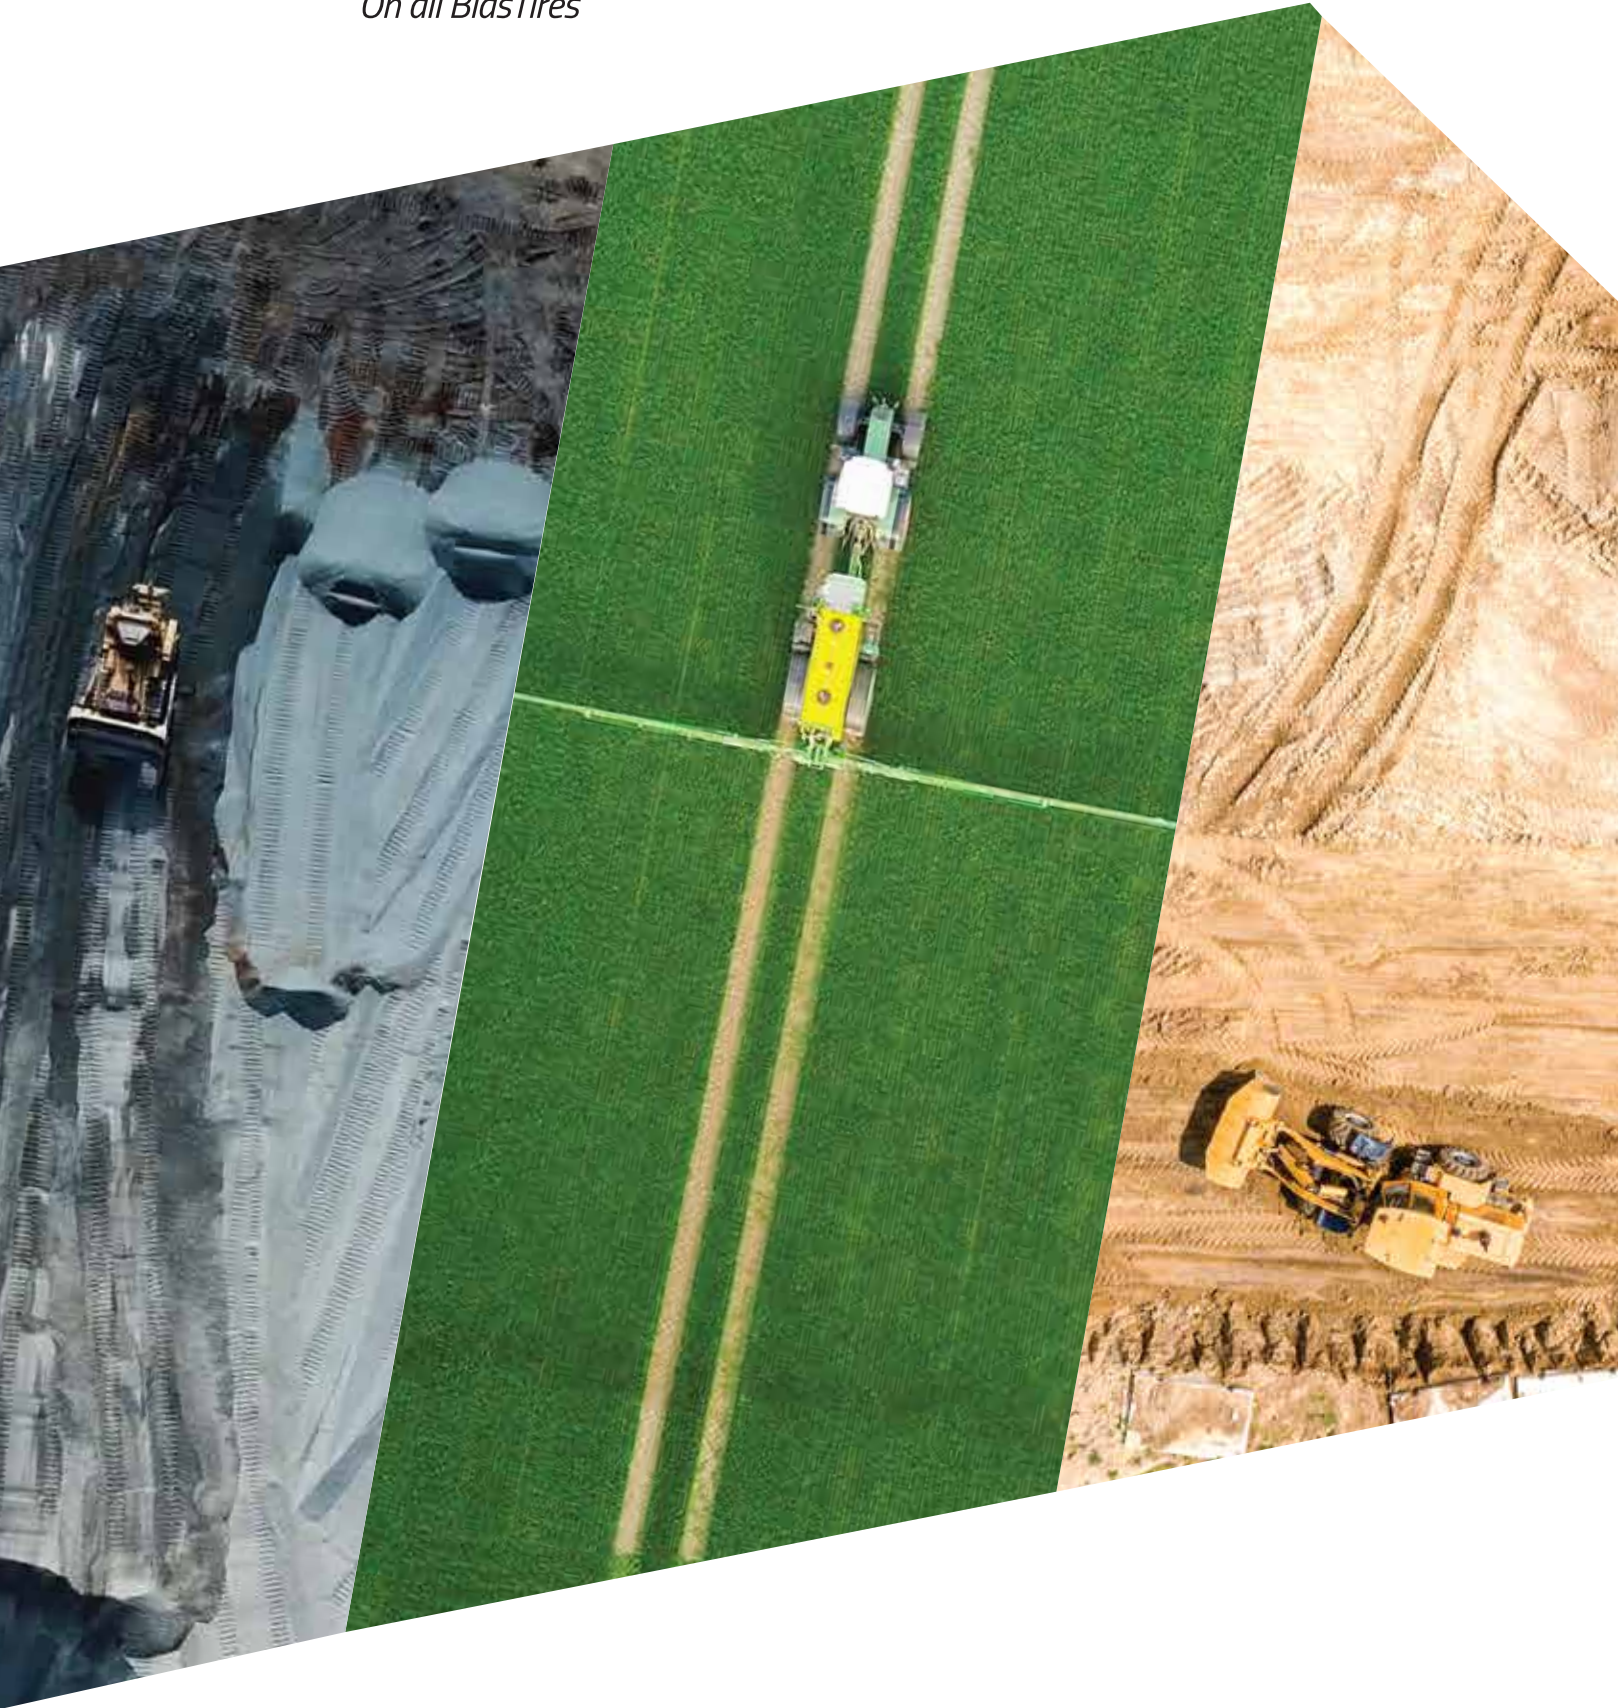

 **ASCENSO**
never stop rising

Ascenso International Warranty Policy for all Bias Tires

Limited warranty


This limited warranty covers ASCENSO branded Bias tire that are sold in the USA and Canada Markets, are manufactured on or after April 1, 2020 and meet the following criteria:

Eligibility

- Every tire bearing the name ASCENSO and with a complete week codes molded in the sidewall is warranted to be free from manufacturing defects within the manufacturer's control.
- Products with at least 2 (32nds) of tread remaining.
- The replacement percentage will be multiplied by the original purchase price of the tire (excluding any taxes or duties) to determine the amount of reimbursement to be applied. Such reimbursement must be applied towards the purchase price of the replacement tire in effect at the time of adjustment.
- All adjusted tires will be disabled, and the week codes will be removed. The customer is responsible for the disposal of all adjusted tires.
- This warranty coverage is for tires used within published design specifications for ASCENSO tires. Any use outside such specifications automatically voids the warranty. Please consult ASCENSO data books or maintenance manuals for design specifications.
- This warranty does not apply to used or 'NA' (not adjustable) tires.
- If an examination by an authorized ASCENSO representative shows that any such tire failed as a result of manufacturing defects, either it will be, at the option of ASCENSO, repaired at no charge or a reimbursement will be issued towards the purchase price of a replacement tire being comparable with the ASCENSO product. This reimbursement will be determined by applying the lesser of the percentage of remaining tread depth (RTD%) and the maximum age-based reimbursement shown in the graph displayed below.

Bias Agriculture, Industrial & Earthmover tires:

amount of credit to customer for manufacturing defects

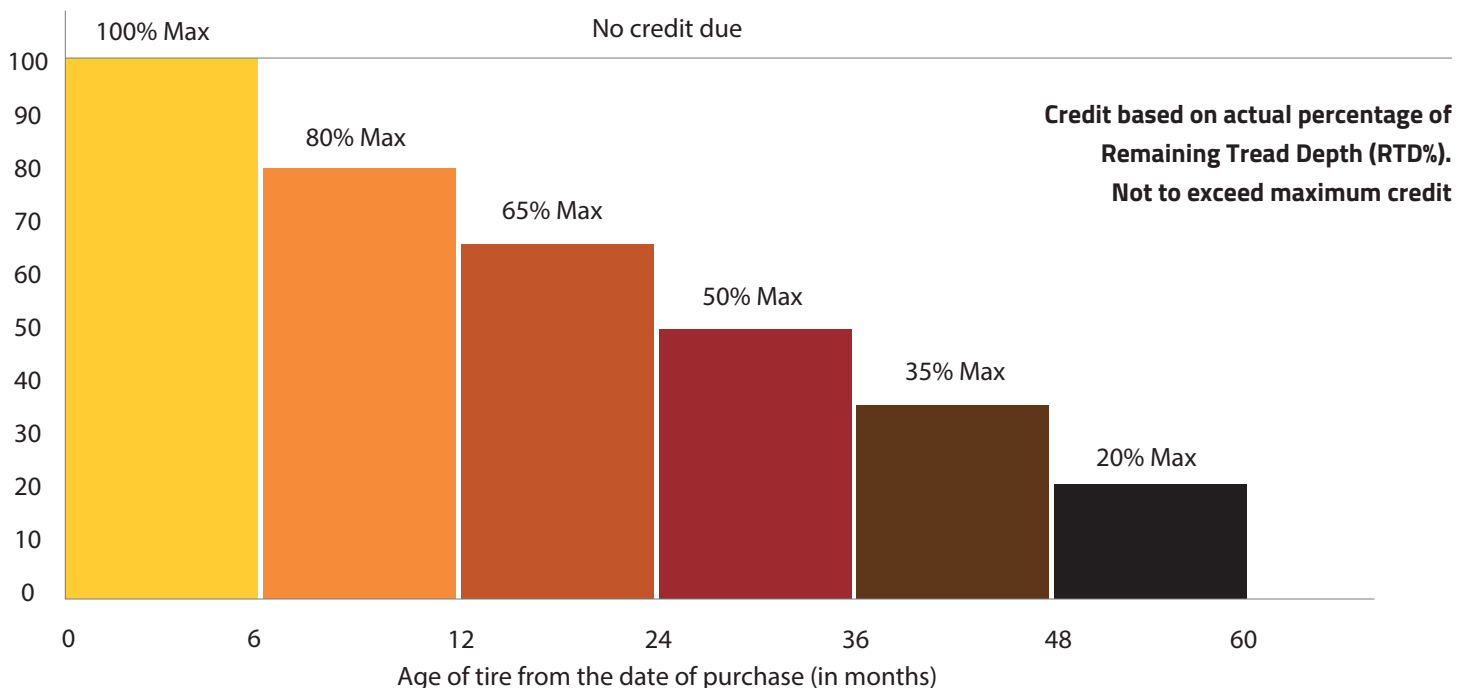

Time period

This warranty applies to a maximum period of 5 years (60 months) from the date of purchase of a tire. If no invoice or documentation of the purchase can be provided, the date of manufacture will be used to determine the warranty.

Limitations

- This limited warranty is applicable to the original purchaser and is not assignable to subsequent purchasers.
- No ASCENSO dealer, agent, or representative has the authority to make or imply any representation, promise or agreement which in any way varies or extends the terms of this warranty.
- Any tire, no matter how well manufactured, may fail in service or become unserviceable due to conditions beyond the control of the manufacturer.
- This limited warranty is under no circumstances a representation that a tire failure cannot occur.
- To the extent that the provisions of any applicable legislation expressly replace, eliminate, amend or prohibit any term or terms contained herein, such term or terms shall be accordingly replaced, eliminated, amended or extended, as the case may be, in accordance with such legislation.

Limited warranty exclusions

All tire warranties are subject to the following exclusions:

1. Tires purchased after 60 months from the date of manufacture.
2. Tires for which alternative warranties or guarantees have been negotiated.
3. Tires used under chains. ASCENSO does recognize that in many applications tire chains provide enhanced tire protection and may extend the tire life. In these cases, ASCENSO may extend special negotiated warranties. Please consult your ASCENSO Off Road Tire Division representative for details.
4. Damage resulting from misuse, improper mounting, misapplication, use of non-approved rims, improper inflation, overloading, running on a flat tire, misalignment or imbalance of wheels/rims, defective brakes or shock absorbers, abuse, wilful damage, oil, chemical action, fire or other externally-generated heat, use of studs, water or other material trapped inside the tire, vehicle damage or road hazards (such as rock cuts, punctures, cut separations, impacts, flex breaks).
5. Claims for irregular wear or rapid tread wear.
6. Any tire which is operated above its ton-mile-per hour (TMPH) or ton-kilometre-per hour (TKPH) rating.
7. Tires mounted with non-approved tubes or O-rings.
8. Used, repaired or retread tires.
9. Any modifications to the tire (like added buttress shoulders, regrooving, relugging).
10. Any material added to the tire (like tire fill, sealer, balancer).
11. Use of a solid type fill (such as urethane).



Disclaimer & right to change the policy

When detailed information and/or decisions are required in order to implement/ interpret this policy, Ascenso can add and/or change such detailed information and/or decisions to this policy as "conditions" at any time. Ascenso reserves the right to change policy term and conditions from time to time at its sole direction.

Limited warranty exclusions

12. Any costs associated with the repair of tires (unless previously approved by ASCENSO).
13. Costs of mounting and balancing following pro-rated replacement or repair of tires or tubes, and applicable federal, state, provincial, and local taxes.
14. Cost of disposal of warranted tires. Disposal of tires is the sole responsibility of the customer.
15. All other warranties, including the implied warranties of merchantability and fitness for a particular purpose, are expressly disclaimed to the extent permitted by law.
16. All obligations or liabilities for indirect, incidental, punitive or consequential damage are hereby excluded to the extent permitted by law, including economic loss, loss of profit, loss of use of vehicle, loss of time, personal injury or death.

Some jurisdictions do not allow limitations in how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages; so the above limitations or exclusions may not apply to you.

To obtain the warranty service:

1. Contact an authorized ASCENSO dealer or representative. Please be prepared to provide a proof of purchase of the product and a purchase date.
2. The authorized dealer or representative will contact ASCENSO to arrange the inspection of the tire in question and processing of your claim. The dealer has no authority or responsibility to make the determination as to eligibility for coverage under this warranty.



Disclaimer & right to change the policy

When detailed information and/or decisions are required in order to implement/ interpret this policy, Ascenso can add and/or change such detailed information and/or decisions to this policy as "conditions" at any time. Ascenso reserves the right to change policy term and conditions from time to time at its sole direction.



Our philosophy to conserve and protect natural resources for future generations through environmental stewardship



Ascenso Tyres North America.
4637 Allen Road, Stow, OH 44224
T: 800-321-0941
E: sales@AscensoTiresNA.com
W: www.AscensoTiresNA.com



Mahansaria Tyres Pvt. Ltd.
3rd Floor, Peninsula Chambers, Ganpat Rao Kadam Marg,
Lower Parel West, Mumbai 400013, India
T: +91 22 4348 1600
E: enquiry@ascensotyres.com
W: www.ascensotyres.com



Empty box for distributor/dealer signature and stamp

Please sign and stamp inside the box

Distributor/Dealer