

*The journey becomes easy  
when your co-traveler  
is an expert.*

Americas



**Agriculture & Forestry**





Doing business is a journey.  
Sometimes you just cruise on, sometimes the going gets tough. When it does, you need an expert.

An expert who helps you rise above obstacles and take your business to newer heights.

Presenting Ascenso off-highway tires.

Designed keeping in mind absolutely everything: vehicle types, terrain, weather conditions and category needs. Our expertise comes from our vast experience in the tire business.

We have a total experience of about three decades in the off-highway tire business. Ascenso is our third off-highway tire venture, after having launched two successful off-highway tire brands in the past.

**Let's begin our journey together. Welcome aboard!**

*\*The word 'We' refers to the Mahansaria family.*



Never stop learning.  
Never stop improving.  
Never stop growing.  
**Never stop rising!**

## Our Brand Beliefs

- Customer first
- Long term partnership
- Competitive and world class
- High on value products
- Wide and growing range
- Tyres for specific application
- Consistent quality

## Our Core Values

**O**wnership

**R**espect

**A**gility

**N**ever give up

**G**o getter, go together

**E**mpathetic

A. Patterns, Markings and Definitions

|                                            |    |
|--------------------------------------------|----|
| Tire Size Markings .....                   | 08 |
| Tire Sidewall Marking and Structures ..... | 10 |
| Load Index and Speed Symbols .....         | 11 |
| Product Nomenclature .....                 | 12 |
| Abbreviation .....                         | 13 |

B. Agriculture

Tractor

TRACTOR STEER BIAS

|                  |    |
|------------------|----|
| TSB 110 .....    | 16 |
| TSB 111 .....    | 17 |
| TSB 112 .....    | 18 |
| BOSS TS 10 ..... | 19 |

TRACTOR DRIVE BIAS

|                  |    |
|------------------|----|
| TDB 120 .....    | 20 |
| TDB 121 .....    | 23 |
| TDB 123 .....    | 24 |
| TDB 124 .....    | 25 |
| TDB 125 .....    | 26 |
| BOSS TD 15 ..... | 27 |
| BOSS TD 16 ..... | 28 |

TRACTOR DRIVE RADIAL

|                |    |
|----------------|----|
| XLR 880 .....  | 29 |
| TDR 650 .....  | 30 |
| TDR 700 .....  | 31 |
| TDR 800 .....  | 32 |
| TDR 850 .....  | 33 |
| VDR 2000 ..... | 35 |

COMPACT DRIVE RADIAL

|               |    |
|---------------|----|
| CDR 700 ..... | 38 |
|---------------|----|

TRACTOR DRIVE RADIAL

|               |    |
|---------------|----|
| TDR 900 ..... | 39 |
| VDR 900 ..... | 40 |
| VDR 901 ..... | 41 |

MULTI DRIVE RADIAL

|                |    |
|----------------|----|
| MDR 1000 ..... | 42 |
|----------------|----|

## Harvester

### BIAS

|               |    |
|---------------|----|
| HRB 210 ..... | 45 |
|---------------|----|

### RADIAL

|                |    |
|----------------|----|
| HRR 200 .....  | 46 |
| VHR 3000 ..... | 47 |

## Implement

### BIAS

|                  |    |
|------------------|----|
| IMB 160 .....    | 49 |
| IMB 161 .....    | 50 |
| IMB 162 .....    | 51 |
| IMB 163 .....    | 52 |
| IMB 164 .....    | 53 |
| IMB 165 .....    | 54 |
| IMB 166 .....    | 55 |
| IMB 168 .....    | 56 |
| BOSS TR 20 ..... | 57 |
| BOSS TR 21 ..... | 58 |
| BOSS TR 22 ..... | 59 |

### RADIAL

|                |    |
|----------------|----|
| IMR 140 .....  | 60 |
| VIR 2500 ..... | 61 |
| SPR 250 .....  | 62 |

## Flotation

### BIAS

|               |    |
|---------------|----|
| FTB 190 ..... | 64 |
|---------------|----|

### RADIAL

|               |    |
|---------------|----|
| FCR 185 ..... | 65 |
| FTR 170 ..... | 66 |
| FTR 176 ..... | 68 |

## Irrigation

### BIAS

|               |    |
|---------------|----|
| IRB 260 ..... | 70 |
|---------------|----|

## Multi-Purpose

### BIAS

|               |    |
|---------------|----|
| SPB 260 ..... | 72 |
|---------------|----|

### RADIAL

|               |    |
|---------------|----|
| MPR 390 ..... | 73 |
|---------------|----|

## Lawn & Garden

|               |    |
|---------------|----|
| <b>RADIAL</b> |    |
| UTR 240 ..... | 75 |

## C. Forestry

### Agro Forestry

|               |    |
|---------------|----|
| <b>BIAS</b>   |    |
| AFB 821 ..... | 78 |

### Log Skidder

|               |    |
|---------------|----|
| <b>BIAS</b>   |    |
| LSB 780 ..... | 80 |

### Forestry Forwarder

|               |    |
|---------------|----|
| <b>BIAS</b>   |    |
| FFB 840 ..... | 82 |
| FFB 841 ..... | 83 |
| FFB 843 ..... | 84 |

## D. Tire Care and Usage Manual

|                                         |     |
|-----------------------------------------|-----|
| Tire Description .....                  | 86  |
| Conversion Table .....                  | 87  |
| Tire Care and Maintenance .....         | 88  |
| Fitting and Removal Instructions .....  | 89  |
| Parameter For Extending Tire Life ..... | 91  |
| Rim and Wheel Discs .....               | 93  |
| SKU/ EAN Code .....                     | 95  |
| Warranty .....                          | 111 |

# 1. Tire Size Markings

380/55-17 14 PR TL

- Nominal Section Width  
(in mm)
- Aspect Ratio (SH/SW) in %
- Type Construction (Bias)
- Nominal Rim Diameter  
(in inches)
- Ply Rating
- Tubeless



19.5L-24 12 PR TL

- Nominal Section Width  
(in inches)
- Reduced Aspect Ratio
- Type Construction (Bias )
- Nominal Rim Diameter  
(in inches)
- Ply Rating
- Tubeless

23.5-25 20 PR TL 3


- Nominal Section Width  
(in inches)
- Type Construction (Bias)
- Nominal Rim Diameter  
(in inches)
- Ply Rating
- Tubeless
- T&RA Code

# 1. Tire Size Markings

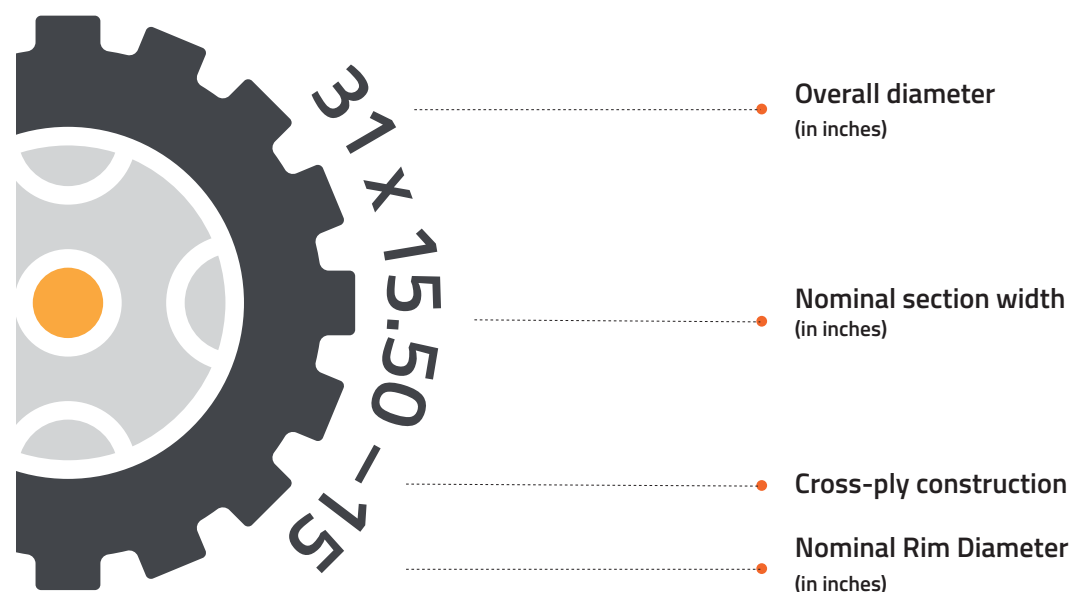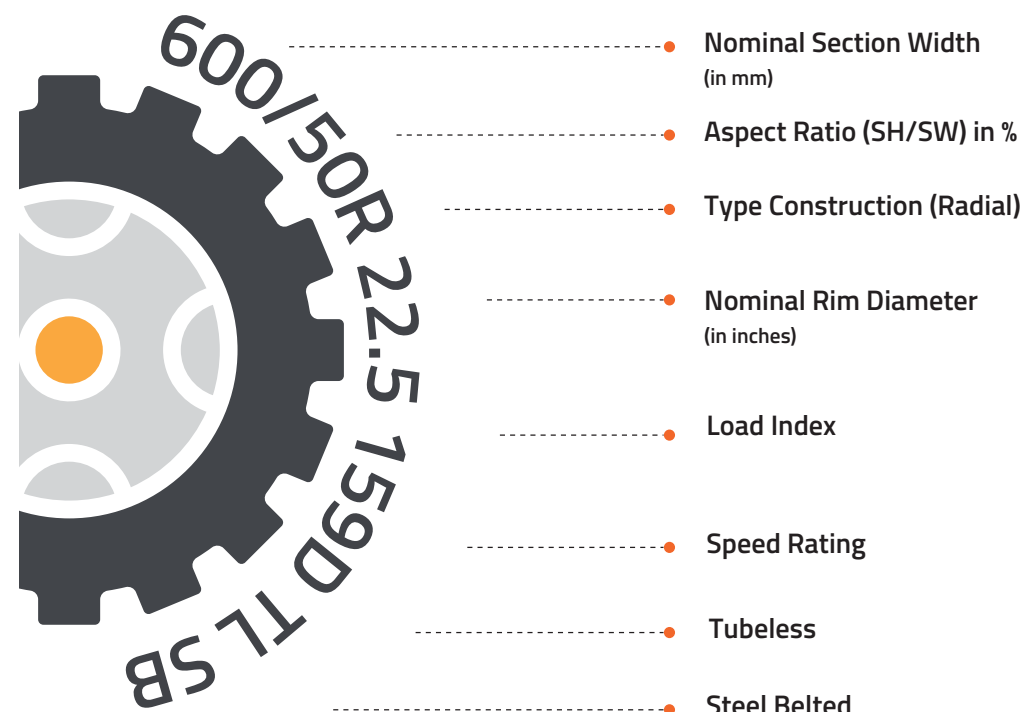



## 2. Tire Sidewall Markings

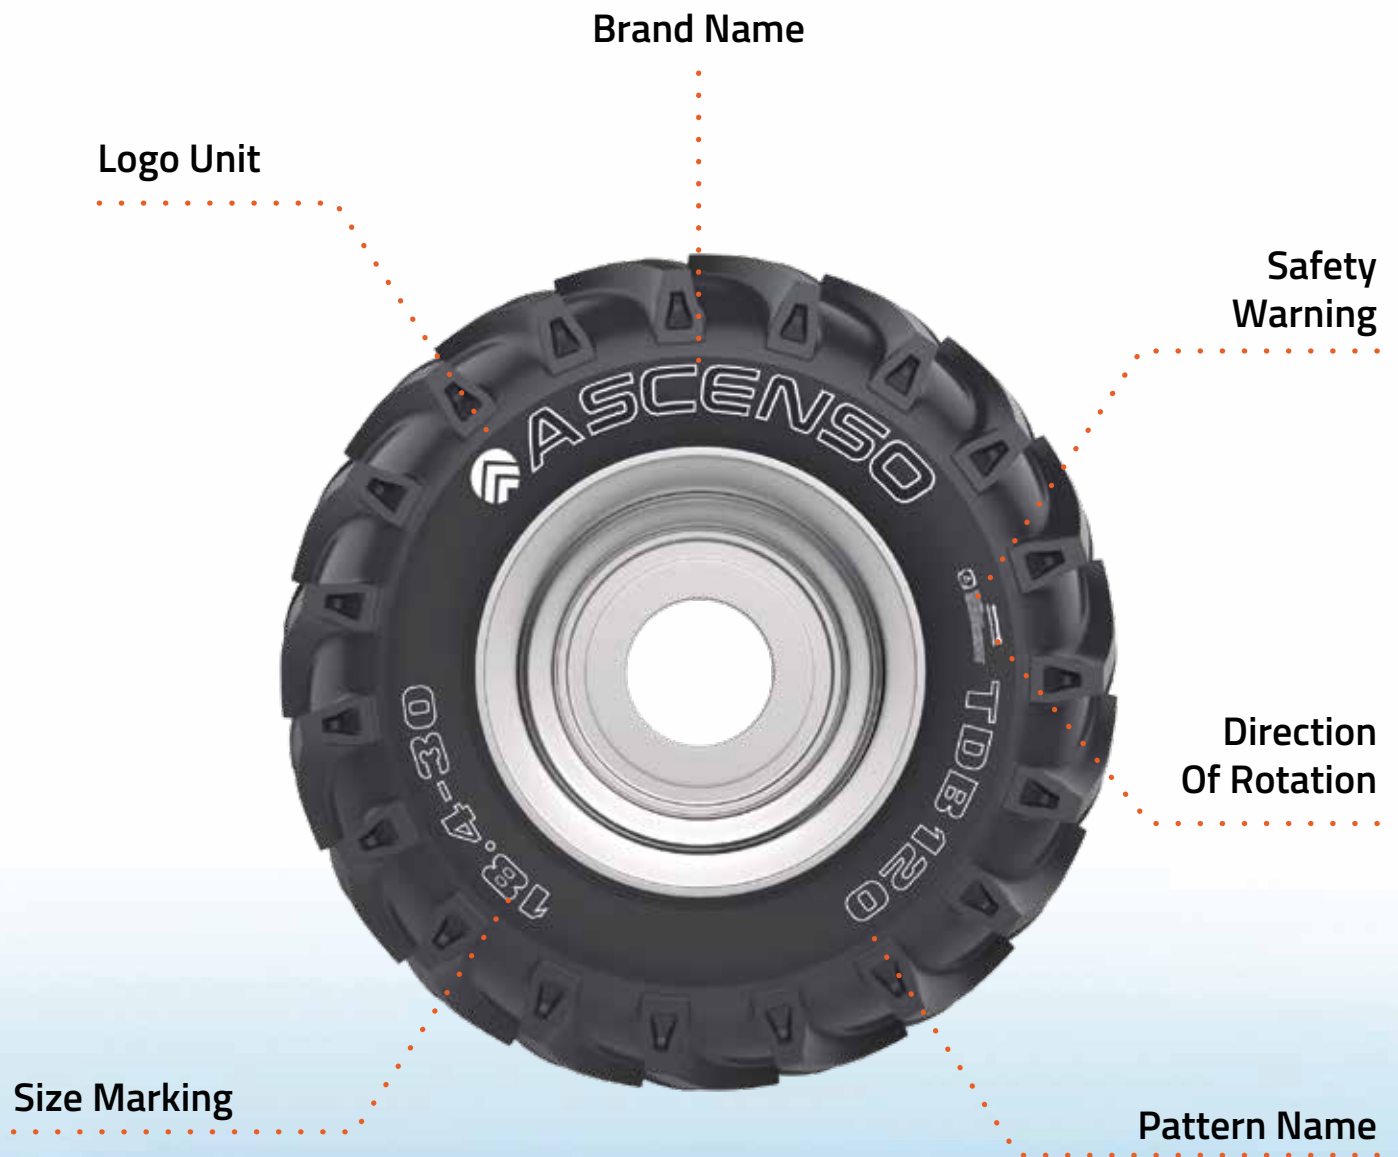

### 3. Load Index and Speed Symbols

According to ETRTO (The European Tire and Rim Technical Organization), as well as to ECE (Economic Commission for Europe-UN Institution Geneva), the maximum load capacity, as well as the maximum speed are indicated by load index and speed symbol.

The following table shows the meaning of each speed symbol and the load in kg/lbs corresponding to each load index.

| Load Index | Load Kg / lbs | Load Index | Load Kg / lbs | Load Index | Load Kg / lbs | Load Index | Load Kg / lbs | Speed Symbol | Kmph / mph |
|------------|---------------|------------|---------------|------------|---------------|------------|---------------|--------------|------------|
| 50         | 190/419       | 90         | 600/1323      | 130        | 1900 / 4189   | 170        | 6000 / 13228  | A1           | 5 / 3      |
| 51         | 195/430       | 91         | 615/1356      | 131        | 1950 / 4299   | 171        | 6150 / 13558  | A2           | 10 / 6     |
| 52         | 200/441       | 92         | 630/1389      | 132        | 2000 / 4409   | 172        | 6300 / 13889  | A3           | 15 / 9     |
| 53         | 206/454       | 93         | 650/1433      | 133        | 2060 / 4541   | 173        | 6500 / 14330  | A4           | 20 / 12    |
| 54         | 212/467       | 94         | 670/1477      | 134        | 2120 / 4670   | 174        | 6700 / 14771  | A5           | 25 / 16    |
| 55         | 218/481       | 95         | 690/1521      | 135        | 2180 / 4806   | 175        | 6900 / 15212  | A6           | 30 / 19    |
| 56         | 224/494       | 96         | 710/1566      | 136        | 2240 / 4938   | 176        | 7100 / 15653  | A7           | 35 / 22    |
| 57         | 230/597       | 97         | 730/1610      | 137        | 2300 / 5071   | 177        | 7300 / 16093  | A8           | 40 / 25    |
| 58         | 236/520       | 98         | 750/1654      | 138        | 2360 / 5203   | 178        | 7500 / 16534  | B            | 50 / 31    |
| 59         | 243/536       | 99         | 775/1709      | 139        | 2430 / 5357   | 179        | 7750 / 17086  | C            | 60 / 37    |
| 60         | 250/551       | 100        | 800/1765      | 140        | 2500 / 5511   | 180        | 8000 / 17637  | D            | 65 / 40    |
| 61         | 257/567       | 101        | 805/1820      | 141        | 2575 / 5677   | 181        | 8250 / 18188  | E            | 70 / 44    |
| 62         | 265/584       | 102        | 850 / 1874    | 142        | 2650 / 5842   | 182        | 8500 / 18739  | F            | 80 / 50    |
| 63         | 272/600       | 103        | 875 / 1929    | 143        | 2725 / 6007   | 183        | 8750 / 19290  | G            | 90 / 56    |
| 64         | 280/617       | 104        | 900 / 1984    | 144        | 2800 / 6173   | 184        | 9000 / 19841  | J            | 100 / 62   |
| 65         | 290/639       | 105        | 925 / 2039    | 145        | 2900 / 6393   | 185        | 9250 / 20392  | K            | 110 / 68   |
| 66         | 300/662       | 106        | 950 / 2094    | 146        | 3000 / 6614   | 186        | 9500 / 20944  | L            | 120 / 75   |
| 67         | 307/667       | 107        | 975 / 2149    | 147        | 3075 / 6779   | 187        | 9750 / 21495  | M            | 130 / 81   |
| 68         | 315/695       | 108        | 1000 / 2205   | 148        | 3150 / 6944   | 188        | 10000 / 22046 | N            | 140 / 87   |
| 69         | 325/717       | 109        | 1030 / 2271   | 149        | 3250 / 7165   | 189        | 10300 / 22707 | P            | 150 / 93   |
| 70         | 335/739       | 110        | 1060 / 2337   | 150        | 3350 / 7385   | 190        | 10600 / 23369 | Q            | 160 / 99   |
| 71         | 345/761       | 111        | 1090 / 2403   | 151        | 3450 / 7606   | 191        | 10900 / 24030 | R            | 170 / 106  |
| 72         | 355/783       | 112        | 1120 / 2469   | 152        | 3550 / 7826   | 192        | 11200 / 24691 | S            | 180 / 112  |
| 73         | 365/805       | 113        | 1150 / 2535   | 153        | 3650 / 8047   | 193        | 11500 / 25353 |              |            |
| 74         | 375/827       | 114        | 1180 / 2601   | 154        | 3750 / 8267   | 194        | 11800 / 26014 |              |            |
| 75         | 387/853       | 115        | 1215 / 2679   | 155        | 3875 / 8543   | 195        | 12150 / 26786 |              |            |
| 76         | 400/882       | 116        | 1250 / 2756   | 156        | 4000 / 8818   | 196        | 12500 / 27557 |              |            |
| 77         | 412/908       | 117        | 1285 / 2833   | 157        | 4000 / 8818   | 197        | 12850 / 28329 |              |            |
| 78         | 425/937       | 118        | 1320 / 2910   | 158        | 4250 / 9369   | 198        | 13200 / 29101 |              |            |
| 79         | 437/964       | 119        | 1360 / 2998   | 159        | 4375 / 9645   | 199        | 13600 / 29982 |              |            |
| 80         | 450/992       | 120        | 1400 / 3086   | 160        | 4500 / 9921   | 200        | 14000 / 30864 |              |            |
| 81         | 462/1019      | 121        | 1450 / 3197   | 161        | 4625 / 10196  | 201        | 14500 / 31966 |              |            |
| 82         | 475/1047      | 122        | 1500 / 3307   | 162        | 4750 / 10472  | 202        | 15000 / 33069 |              |            |
| 83         | 487/1074      | 123        | 1550 / 3417   | 163        | 4875 / 10747  | 203        | 15500 / 34171 |              |            |
| 84         | 500/1103      | 124        | 1600 / 3527   | 164        | 5000 / 11023  | 204        | 16000 / 35273 |              |            |
| 85         | 515/1136      | 125        | 1650 / 3638   | 165        | 5150 / 11354  | 205        | 16500 / 36376 |              |            |
| 86         | 530/1169      | 126        | 1700 / 3748   | 166        | 5300 / 11684  | 206        | 17000 / 37478 |              |            |
| 87         | 545/1202      | 127        | 1750 / 3858   | 167        | 5450 / 12015  | 207        | 17500 / 38580 |              |            |
| 88         | 560/1235      | 128        | 1800 / 3968   | 168        | 5600 / 12346  | 208        | 18000 / 39683 |              |            |
| 89         | 580/1279      | 129        | 1850 / 4078   | 169        | 5800 / 12787  | 209        | 18500 / 40790 |              |            |

## 4. Product Nomenclature



| Application | Category           | Cat Code | Radial/ Bias | Design Number | Product Name |
|-------------|--------------------|----------|--------------|---------------|--------------|
| Agriculture | TRACTOR STEER      | TS       | B            | 110           | TSB 110      |
|             | TRACTOR STEER      | TS       | B            | 111           | TSB 111      |
|             | TRACTOR STEER      | TS       | B            | 112           | TSB 112      |
|             | TRACTOR STEER      | BOSS TS  | B            | 10            | BOSS TS 10   |
|             | TRACTOR DRIVE      | TD       | B            | 120           | TDB 120      |
|             | TRACTOR DRIVE      | TD       | B            | 121           | TDB 121      |
|             | TRACTOR DRIVE      | TD       | B            | 123           | TDB 123      |
|             | TRACTOR DRIVE      | TD       | B            | 124           | TDB 124      |
|             | TRACTOR DRIVE      | BOSS TD  | B            | 15            | BOSS TD 15   |
|             | TRACTOR DRIVE      | BOSS TD  | B            | 16            | BOSS TD 16   |
|             | TRACTOR DRIVE      | TD       | R            | 850           | TDR 850      |
|             | TRACTOR DRIVE      | TD       | R            | 700           | TDR 700      |
|             | TRACTOR DRIVE      | TD       | R            | 800           | TDR 800      |
|             | TRACTOR DRIVE      | TD       | R            | 650           | TDR 650      |
|             | TRACTOR DRIVE      | XL       | R            | 880           | XLR 880      |
|             | TRACTOR DRIVE      | VD       | R            | 2000          | VDR 2000     |
|             | COMPACT DRIVE      | CD       | R            | 700           | CDR 700      |
|             | ROW CROP           | TD       | R            | 900           | TDR 900      |
|             | ROW CROP           | VD       | R            | 900           | VDR 900      |
|             | ROW CROP           | VD       | R            | 901           | VDR 901      |
|             | MULTI DRIVE        | MD       | R            | 1000          | MDR 1000     |
|             | HARVESTER          | HR       | B            | 210           | HRB 210      |
|             | HARVESTER          | HR       | R            | 200           | HRR 200      |
|             | IMPLEMENT          | IM       | B            | 160           | IMB 160      |
|             | IMPLEMENT          | IM       | B            | 161           | IMB 161      |
|             | IMPLEMENT          | IM       | B            | 162           | IMB 162      |
|             | IMPLEMENT          | IM       | B            | 163           | IMB 163      |
|             | IMPLEMENT          | IM       | B            | 164           | IMB 164      |
|             | IMPLEMENT          | IM       | B            | 165           | IMB 165      |
|             | IMPLEMENT          | IM       | B            | 166           | IMB 166      |
|             | IMPLEMENT          | BOSS TR  | B            | 20            | BOSS TR 20   |
|             | IMPLEMENT          | BOSS TR  | B            | 21            | BOSS TR 21   |
|             | IMPLEMENT          | IM       | R            | 140           | IMR 140      |
|             | IMPLEMENT          | VI       | R            | 2500          | VIR 2500     |
|             | IMPLEMENT          | SP       | R            | 250           | SPR 250      |
|             | FLOTATION          | FT       | B            | 190           | FTB 190      |
|             | FLOTATION          | FC       | R            | 185           | FCR 185      |
|             | FLOTATION          | FT       | R            | 170           | FTR 170      |
|             | IRRIGATION         | IR       | B            | 260           | IRB 260      |
|             | TELEHANDLER        | TH       | B            | 230           | THB 230      |
|             | TELEHANDLER        | TH       | B            | 230 HD        | THB 230 HD   |
|             | MULTI PURPOSE      | SP       | B            | 260           | SPB 260      |
|             | MULTI PURPOSE      | MP       | R            | 390           | MPR 390      |
|             | UTILITY TRACTOR    | UT       | R            | 240           | UTR 240      |
| Forestry    | AGRO FORESTRY      | AF       | B            | 821           | AFB 821      |
|             | LOG SKIDDER        | LS       | B            | 780           | LSB 780      |
|             | FORESTRY FORWARDER | FF       | B            | 840           | FFB 840      |

## 5. Abbreviation

| SR No. | Abbreviation | Fullform                       |
|--------|--------------|--------------------------------|
| 1      | (SH/SW)      | (Section Height/Section Width) |
| 2      | PR           | Ply rating                     |
| 3      | TRA          | Tire and Rim association       |
| 4      | VF           | Very-High Flexion              |
| 5      | HD           | Heavy Duty                     |
| 6      | SB           | Steel Belted                   |
| 7      | SG           | Stubble Guard                  |
| 8      | SL           | Standard Load                  |
| 9      | DB           | Dual Bead                      |
| 10     | CR           | Cut Resistant                  |
| 11     | kg / lbs     | kilogram/ Pound                |
| 12     | kmph         | kilometre per hour             |
| 13     | mph          | miles per hour                 |
| 14     | LI/SI        | Load Index/Speed Index         |
| 15     | 2WD          | 2-wheel drive                  |
| 16     | 4WD          | 4-wheel drive                  |
| 17     | OD           | Overall Diameter               |
| 18     | Psi          | Pound per square inch          |
| 19     | SLR          | Static loaded Radius           |
| 20     | FR           | Free Rolling                   |
| 21     | DW           | Drive Wheel                    |
| 22     | kPa          | kilo Pascal                    |
| 23     | RC           | Rolling Circumference          |
| 24     | Cat Code     | Category Code                  |
| 25     | TT           | Tube Type                      |
| 26     | TL           | Tube Less                      |
| 27     | Rec.         | Recommended                    |
| 28     | Alt.         | Alternate                      |
| 29     | V            | Value Plus                     |



# ● Agriculture





# ● Tractor





## Wider Centre Rib:

- Ease in steering and prevents damage to the grassland.

## High Strength Nylon Carcass:

- Provides stability to the machine and ensures durability.

## Special Tread Compound:

- Provides longer tire life.
- Resistance to puncture.



| Size     | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 5.00-15  | -        | 76A8  | 6  | TT   | 14                   | 4.00E         | 14       | 26        | 5         | 78        | 12         | 880            | 60  | 25              |
| 5.50-16  | -        | 82A8  | 6  | TT   | 19                   | 4.00E         | 18       | 28        | 6         | 84        | 13         | 1050           | 56  | 25              |
| 6.00-16  | -        | 85A8  | 6  | TT   | 22                   | 4.50E         | 20       | 29        | 6         | 87        | 13         | 1130           | 52  | 25              |
| 6.00-16  | -        | 91A8  | 8  | TT   | 22                   | 4.50E         | 20       | 29        | 6         | 87        | 13         | 1350           | 68  | 25              |
| 6.50-16  | -        | 88A8  | 6  | TT   | 23                   | 4.50E         | 24       | 30        | 7         | 90        | 14         | 1230           | 48  | 25              |
| 7.50-16  | -        | 99A8  | 8  | TT   | 26                   | 5.50F         | 34       | 32        | 8         | 95        | 15         | 1710           | 56  | 25              |
| 7.50-16  | -        | 104A8 | 10 | TT   | 26                   | 5.50F         | 35       | 32        | 8         | 95        | 15         | 1980           | 69  | 25              |
| 9.00-16  | -        | 111A8 | 10 | TT   | 30                   | 6.00F         | 49       | 34        | 9         | 101       | 15         | 2400           | 60  | 25              |
| 10.00-16 | -        | 115A8 | 10 | TT   | 34                   | W8L           | 55       | 35        | 11        | 105       | 16         | 2680           | 49  | 25              |
| 11.00-16 | -        | 118A8 | 10 | TT   | 37                   | W10L          | 70       | 38        | 12        | 114       | 17         | 2910           | 48  | 25              |
| 7.50-18  | -        | 102A8 | 8  | TT   | 26                   | 5.50F         | 35       | 34        | 8         | 101       | 16         | 1870           | 56  | 25              |
| 4.00-19  | -        | 69A8  | 6  | TT   | 14                   | 3.00D         | 13       | 28        | 4         | 84        | 13         | 720            | 52  | 25              |
| 6.00-19  | -        | 89A8  | 6  | TT   | 20                   | 4.50E         | 22       | 32        | 6         | 96        | 15         | 1280           | 52  | 25              |
| 7.50-20  | -        | 105A8 | 8  | TT   | 26                   | 5.50F         | 40       | 36        | 8         | 107       | 17         | 2040           | 56  | 25              |



## Unique Dumbbell Pattern:

- Reduces block tearing and shoulder block deformation.

## Strong Nylon Carcass:

- Provides stability to the machine and ensures durability.

## Special Tread Compound:

- Ensures longer tire life.
- Resistance to puncture.



| Size         | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|--------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 4.50-16      | -        | 74A8  | 6  | TT   | 13                   | 3.00D         | 12       | 26        | 5         | 77        | 12         | 830            | 65  | 25              |
| 5.00-16      | -        | 76A8  | 6  | TT   | 15                   | 4.00E         | 14       | 27        | 6         | 80        | 13         | 880            | 61  | 25              |
| 5.50-16      | -        | 82A8  | 6  | TT   | 17                   | 4.00E         | 17       | 28        | 6         | 84        | 13         | 1050           | 56  | 25              |
| 6.00-16      | -        | 91A8  | 8  | TT   | 18                   | 4.50E         | 25       | 29        | 6         | 87        | 13         | 1350           | 65  | 25              |
| 6.00-16 (HD) | -        | 91A8  | 8  | TT   | 22                   | 4.50E         | 25       | 29        | 6         | 87        | 13         | 1350           | 65  | 25              |
| 6.50-16      | -        | 94A8  | 8  | TT   | 22                   | 4.50E         | 28       | 30        | 7         | 90        | 14         | 1480           | 61  | 25              |
| 6.50-16 (HD) | -        | 94A8  | 8  | TT   | 22                   | 4.50E         | 30       | 30        | 7         | 90        | 14         | 1480           | 61  | 25              |
| 7.50-16      | -        | 99A8  | 8  | TT   | 26                   | 5.50F         | 36       | 32        | 8         | 95        | 15         | 1710           | 56  | 25              |
| 7.50-16 (HD) | -        | 99A8  | 8  | TT   | 26                   | 5.50F         | 37       | 32        | 8         | 95        | 15         | 1710           | 56  | 25              |
| 7.50-16      | -        | 119A8 | 14 | TT   | 26                   | 5.50F         | 40       | 32        | 8         | 95        | 15         | 3000           | 80  | 25              |
| 7.50-18      | -        | 102A8 | 8  | TT   | 26                   | 5.50F         | 38       | 34        | 8         | 101       | 16         | 1870           | 56  | 25              |
| 6.00-19      | -        | 91A8  | 8  | TT   | 18                   | 4.50E         | 23       | 32        | 7         | 96        | 15         | 1350           | 56  | 25              |
| 6.50-20      | -        | 93A8  | 8  | TT   | 22                   | 4.50F         | 36       | 34        | 7         | 102       | 16         | 1650           | 56  | 25              |
| 7.50-20      | -        | 105A8 | 8  | TT   | 26                   | 5.50F         | 44       | 36        | 8         | 107       | 17         | 2040           | 56  | 25              |





## Wider Ribs:

- Provides ease in steering.
- Better maneuvering.

## High Strength Nylon Carcass:

- Provides longer tire life.
- Trouble-free service.



| Size        | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 9.5L-15 SL  | -        | 102A8 | 8  | TL   | 22                   | 7.00          | 40       | 31        | 10        | 92        | 14         | 1870           | 48  | 25              |
| 11L-15 SL   | -        | 106A8 | 8  | TL   | 26                   | 8LB           | 49       | 32        | 11        | 96        | 15         | 2090           | 44  | 25              |
| 10.00-16 SL | -        | 110A8 | 8  | TL   | 26                   | 8LB           | 55       | 35        | 11        | 105       | 16         | 2330           | 44  | 25              |
| 11.00-16 SL | -        | 114A8 | 8  | TL   | 30                   | 10LB          | 71       | 38        | 12        | 114       | 17         | 2600           | 41  | 25              |
| 11.00-16 SL | -        | 123A8 | 12 | TL   | 30                   | 10LB          | 79       | 38        | 12        | 114       | 17         | 3410           | 60  | 25              |



## Specially-designed CCR Compound:

- Puncture and cut resistance.
- Extra mileage.

## Wider Centre Rib:

- Optimum road contact for better steering control.



| Size    | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 6.00-16 | -        | 94A6  | 8  | TT   | 24                   | 4.50E         | 28       | 29        | 7         | 86        | 13         | 1470           | 65  | 19              |
| 6.50-16 | -        | 98A6  | 8  | TT   | 30                   | 4.50E         | 35       | 30        | 7         | 90        | 14         | 1650           | 61  | 19              |
| 7.50-16 | -        | 103A6 | 8  | TT   | 28                   | 5.50F         | 38       | 32        | 8         | 95        | 15         | 1930           | 54  | 19              |



## Wider Lugs:

- Easy to penetrate the soil, generate optimum traction and ensure comfortable ride.

## Sturdy Sidewall Structure:

- Provides resistance to external damage.

## Strong Nylon Carcass:

- Safeguards the tire against failures.



| Size             | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|------------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 6.50-16          | -        | 94A8  | 8  | TT   | 20                   | 4E            | 22       | 30        | 7         | 90        | 14         | 1480           | 64  | 25              |
| 8-16             | -        | 88A8  | 6  | TT   | 35                   | 6LB           | 32       | 31        | 8         | 93        | 14         | 1230           | 28  | 25              |
| 9.5-16           | -        | 98 A8 | 8  | TL   | 42                   | 8             | 50       | 33        | 9         | 100       | 15         | 1650           | 41  | 25              |
| 8-18             | -        | 109A8 | 12 | TT   | 35                   | 6F            | 44       | 33        | 8         | 99        | 15         | 2270           | 57  | 25              |
| 8.00-18 HD       | -        | 116A8 | 12 | TT   | 35                   | 6F            | 44       | 33        | 8         | 99        | 15         | 2750           | 68  | 25              |
| 8.3-20           | -        | 92A8  | 6  | TT   | 35                   | W6            | 40       | 35        | 8         | 105       | 16         | 1390           | 35  | 25              |
| 9.5-20           | -        | 99A8  | 6  | TT   | 35                   | W7            | 46       | 37        | 9         | 111       | 17         | 1710           | 30  | 25              |
| 11.2-20          | -        | 107A8 | 8  | TT   | 42                   | W10           | 65       | 39        | 11        | 118       | 18         | 2150           | 35  | 25              |
| 11.2-20 (SB, SG) | -        | 107A8 | 8  | TT   | 42                   | W10           | 93       | 39        | 11        | 118       | 18         | 2150           | 35  | 25              |
| 8.3-24           | -        | 105A8 | 8  | TT   | 35                   | W7            | 44       | 39        | 8         | 117       | 18         | 2040           | 45  | 25              |
| 8.3-24           | -        | 105A8 | 8  | TL   | 35                   | W7            | 45       | 39        | 8         | 117       | 18         | 2040           | 45  | 25              |
| 9.5-24           | -        | 112A8 | 8  | TT   | 39                   | W8            | 57       | 41        | 9         | 123       | 19         | 2470           | 41  | 25              |
| 9.5-24           | -        | 112A8 | 8  | TL   | 39                   | W8            | 59       | 41        | 9         | 123       | 19         | 2470           | 41  | 25              |
| 9.5-24           | -        | 116A8 | 12 | TT   | 39                   | W8            | 63       | 41        | 10        | 123       | 19         | 2760           | 59  | 25              |
| 11.2-24          | -        | 116A8 | 8  | TT   | 42                   | W10           | 70       | 43        | 11        | 130       | 20         | 2750           | 36  | 25              |
| 11.2-24          | -        | 116A8 | 8  | TL   | 42                   | W10           | 77       | 43        | 11        | 130       | 20         | 2750           | 36  | 25              |
| 11.2-24          | -        | 124A8 | 12 | TT   | 42                   | W10           | 79       | 43        | 11        | 130       | 20         | 3520           | 52  | 25              |
| 12.4-24          | -        | 121A8 | 8  | TT   | 43                   | W11           | 86       | 46        | 12        | 136       | 21         | 3190           | 32  | 25              |
| 12.4-24          | -        | 121A8 | 8  | TL   | 43                   | W11           | 89       | 46        | 12        | 136       | 21         | 3190           | 32  | 25              |
| 12.4-24          | -        | 128A8 | 12 | TT   | 43                   | W11           | 96       | 46        | 12        | 136       | 21         | 3960           | 49  | 25              |
| 13.6-24          | -        | 123A8 | 8  | TT   | 45                   | W12           | 103      | 48        | 14        | 142       | 22         | 3410           | 28  | 25              |
| 13.6-24          | -        | 123A8 | 8  | TL   | 45                   | W12           | 106      | 48        | 14        | 142       | 22         | 3410           | 28  | 25              |
| 13.6-24          | -        | 130A8 | 12 | TT   | 45                   | W12           | 114      | 48        | 14        | 142       | 22         | 4190           | 42  | 25              |
| 14.9-24          | -        | 128A8 | 8  | TT   | 43                   | W13           | 119      | 50        | 15        | 149       | 23         | 3960           | 26  | 25              |
| 14.9-24          | -        | 128A8 | 8  | TL   | 43                   | W13           | 123      | 50        | 15        | 149       | 23         | 3960           | 26  | 25              |
| 14.9-24          | -        | 136A8 | 12 | TT   | 43                   | W13           | 139      | 50        | 15        | 149       | 23         | 4930           | 38  | 25              |
| 16.9-24          | -        | 133A8 | 8  | TT   | 47                   | W15L          | 148      | 52        | 17        | 157       | 24         | 4540           | 24  | 25              |
| 16.9-24          | -        | 133A8 | 8  | TL   | 47                   | W15L          | 156      | 52        | 17        | 157       | 24         | 4540           | 24  | 25              |
| 16.9-24          | -        | 143A8 | 12 | TT   | 47                   | W15L          | 167      | 52        | 17        | 157       | 24         | 6000           | 35  | 25              |
| 14.9-26          | -        | 129A8 | 10 | TT   | 45                   | W12           | 140      | 52        | 15        | 155       | 24         | 4070           | 32  | 25              |
| 14.9-26          | -        | 134A8 | 12 | TT   | 46                   | W12           | 143      | 52        | 15        | 155       | 24         | 4670           | 39  | 25              |
| 16.9-26          |          | 133A8 | 10 | TT   | 48                   | W15L          | 166      | 54        | 17        | 163       | 25         | 4540           | 28  | 25              |

# TDB 120 - [R-1] [TT/TL]



Tractor



| Size        | ALT Size | LI/SI  | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-------------|----------|--------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 11.2-28     | -        | 118A8  | 8  | TT   | 42                   | W10           | 80       | 47        | 11        | 142       | 22         | 2910           | 36  | 25              |
| 11.2-28     | -        | 118A8  | 8  | TL   | 42                   | W10           | 84       | 47        | 11        | 142       | 22         | 2910           | 36  | 25              |
| 12.4-28     | -        | 123A8  | 8  | TT   | 43                   | W11L          | 98       | 50        | 12        | 148       | 23         | 3410           | 32  | 25              |
| 12.4-28     | -        | 123A8  | 8  | TL   | 43                   | W11L          | 103      | 50        | 12        | 148       | 23         | 3410           | 32  | 25              |
| 12.4-28     | -        | 131A8  | 12 | TT   | 43                   | W11L          | 110      | 50        | 12        | 148       | 23         | 4300           | 51  | 25              |
| 13.6-28     | -        | 125A8  | 8  | TT   | 45                   | W12           | 114      | 52        | 14        | 154       | 24         | 3630           | 28  | 25              |
| 13.6-28     | -        | 125A8  | 8  | TL   | 45                   | W12           | 117      | 52        | 14        | 154       | 24         | 3630           | 28  | 25              |
| 14.9-28     | -        | 130A8  | 8  | TT   | 47                   | W13           | 132      | 54        | 15        | 161       | 25         | 4190           | 26  | 25              |
| 14.9-28     | -        | 130A8  | 8  | TL   | 47                   | W13           | 141      | 54        | 15        | 161       | 25         | 4190           | 26  | 25              |
| 14.9-28     | -        | 137A8  | 12 | TT   | 47                   | W13           | 148      | 54        | 15        | 161       | 25         | 5070           | 38  | 25              |
| 16.9-28     | -        | 135A8  | 8  | TT   | 47                   | W15L          | 160      | 56        | 17        | 169       | 26         | 4800           | 24  | 25              |
| 16.9-28     | -        | 135A8  | 8  | TL   | 47                   | W15L          | 166      | 56        | 17        | 169       | 26         | 4800           | 24  | 25              |
| 16.9-28     | -        | 143A8  | 12 | TT   | 47                   | W15L          | 172      | 56        | 17        | 169       | 26         | 6000           | 35  | 25              |
| 7.2-30      | -        | 96A8   | 6  | TT   | 35                   | W6            | 46       | 43        | 7         | 129       | 20         | 1560           | 41  | 25              |
| 9.5-30      | -        | 111A8  | 6  | TT   | 39                   | W7            | 69       | 47        | 10        | 141       | 22         | 2400           | 41  | 25              |
| 14.9-30     | -        | 127A8  | 8  | TT   | 45                   | W13           | 140      | 56        | 15        | 167       | 26         | 3850           | 26  | 25              |
| 16.9-30     | -        | 137A8  | 8  | TT   | 47                   | W15L          | 171      | 58        | 17        | 175       | 27         | 5070           | 24  | 25              |
| 16.9-30     | -        | 137A8  | 8  | TL   | 47                   | W15L          | 177      | 58        | 17        | 175       | 27         | 5070           | 24  | 25              |
| 16.9-30     | -        | 144A8  | 12 | TT   | 47                   | W15L          | 187      | 58        | 17        | 175       | 27         | 6170           | 36  | 25              |
| 16.9-30     | -        | 146A8  | 14 | TT   | 47                   | W15L          | 190      | 58        | 17        | 175       | 27         | 6610           | 41  | 25              |
| 18.4-30     | -        | 139A8  | 8  | TT   | 48                   | W16L          | 188      | 61        | 18        | 183       | 28         | 5350           | 20  | 25              |
| 18.4-30     | -        | 139A8  | 8  | TL   | 48                   | W16L          | 205      | 61        | 18        | 183       | 28         | 5350           | 20  | 25              |
| 18.4-30     | -        | 152A8  | 14 | TT   | 48                   | W16L          | 228      | 61        | 18        | 183       | 28         | 7820           | 39  | 25              |
| 18.4-30     | -        | 154A8  | 16 | TT   | 48                   | W16L          | 235      | 61        | 18        | 183       | 28         | 8260           | 42  | 25              |
| 8.3-32      | -        | 107A8  | 8  | TT   | 39                   | W7            | 57       | 47        | 8         | 141       | 22         | 2150           | 46  | 25              |
| 8.3-32 (HD) | -        | 107A8  | 8  | TT   | 35                   | W7            | 64       | 47        | 8         | 141       | 22         | 2150           | 46  | 25              |
| 9.5-32      | -        | 106A8  | 6  | TT   | 39                   | W7            | 72       | 49        | 10        | 147       | 23         | 2090           | 30  | 25              |
| 12.4-32     | -        | 125A8  | 8  | TT   | 43                   | W11L          | 107      | 54        | 12        | 160       | 25         | 3630           | 32  | 25              |
| 16.9-34     | -        | 139A8  | 8  | TT   | 47                   | W15L          | 191      | 63        | 17        | 187       | 29         | 5350           | 24  | 25              |
| 16.9-34     |          | 139A8  | 8  | TL   | 47                   | W15L          | 201      | 63        | 17        | 187       | 29         | 5350           | 24  | 25              |
| 16.9-34     | -        | 144 A8 | 12 | TL   | 47                   | W15L          | 207      | 63        | 17        | 187       | 29         | 6170           | 33  | 25              |
| 16.9-34     | -        | 149 A8 | 14 | TT   | 47                   | W15L          | 197      | 63        | 17        | 187       | 29         | 7160           | 41  | 25              |
| 18.4-34     | -        | 142A8  | 8  | TT   | 48                   | W16L          | 216      | 65        | 18        | 195       | 30         | 5840           | 20  | 25              |
| 18.4-34     | -        | 142A8  | 8  | TL   | 48                   | W16L          | 226      | 65        | 18        | 195       | 30         | 5840           | 20  | 25              |
| 18.4-34     | -        | 153A8  | 14 | TT   | 48                   | W16L          | 228      | 65        | 18        | 195       | 30         | 8040           | 36  | 25              |
| 12.4-36     | -        | 126A8  | 8  | TT   | 43                   | W11L          | 117      | 58        | 12        | 172       | 27         | 3740           | 32  | 25              |
| 12.4-36     | -        | 139A8  | 14 | TT   | 43                   | W11L          | 138      | 58        | 12        | 172       | 27         | 5350           | 59  | 25              |
| 13.6-36     | -        | 129A8  | 8  | TT   | 45                   | W12           | 141      | 60        | 14        | 178       | 28         | 4070           | 28  | 25              |
| 13.6-36     | -        | 138A8  | 12 | TT   | 45                   | W12           | 157      | 60        | 14        | 178       | 28         | 5200           | 46  | 25              |
| 13.6-36     | -        | 142A8  | 14 | TT   | 46                   | W12           | 164      | 60        | 14        | 178       | 28         | 5850           | 51  | 25              |
| 13.6-38     | -        | 131A8  | 8  | TT   | 45                   | W12           | 148      | 62        | 14        | 184       | 29         | 4300           | 29  | 25              |
| 13.6-38     | -        | 131A8  | 8  | TL   | 45                   | W12           | 153      | 62        | 14        | 184       | 29         | 4300           | 29  | 25              |

Note: SB- Steel Belted, SG- Stubble Guard



# TDB 120 - [R-1] [TT]



Tractor



| Size    | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 13.6-38 | -        | 136A8 | 10 | TT   | 45                   | W12           | 163      | 62        | 14        | 184       | 29         | 4930           | 36  | 25              |
| 13.6-38 | -        | 138A8 | 14 | TT   | 46                   | W12           | 169      | 62        | 14        | 184       | 29         | 5200           | 51  | 25              |
| 15.5-38 | -        | 133A8 | 8  | TT   | 42                   | W14L          | 165      | 62        | 16        | 185       | 29         | 4540           | 26  | 19              |
| 15.5-38 | -        | 133A8 | 8  | TL   | 42                   | W14L          | 179      | 62        | 16        | 185       | 29         | 4540           | 26  | 19              |
| 15.5-38 | -        | 138A6 | 10 | TT   | 42                   | W14L          | 171      | 62        | 16        | 186       | 29         | 5200           | 33  | 19              |
| 15.5-38 | -        | 141A6 | 12 | TT   | 42                   | W14L          | 180      | 62        | 16        | 186       | 29         | 5670           | 41  | 19              |
| 16.9-38 | -        | 141A8 | 8  | TT   | 47                   | W15L          | 207      | 66        | 17        | 199       | 31         | 5670           | 24  | 25              |
| 16.9-38 | -        | 141A8 | 8  | TL   | 48                   | W15L          | 219      | 66        | 17        | 199       | 31         | 5670           | 24  | 25              |
| 16.9-38 | -        | 151A8 | 14 | TT   | 47                   | W15L          | 222      | 66        | 17        | 199       | 31         | 7600           | 38  | 25              |
| 18.4-38 | -        | 143A8 | 8  | TT   | 48                   | W16L          | 241      | 69        | 18        | 207       | 32         | 6000           | 20  | 25              |
| 18.4-38 | -        | 143A8 | 8  | TL   | 48                   | W16L          | 259      | 69        | 18        | 207       | 32         | 6000           | 20  | 25              |
| 18.4-38 |          | 151A8 | 14 | TT   | 48                   | W16L          | 261      | 69        | 18        | 207       | 32         | 8540           | 38  | 25              |

Note: SB- Steel Belted, SG- Stubble Guard

# TDB 121 - [R-1W+] [TL/TT] (Deep Tread)



Tractor



- Optimized lug distribution to support excellent traction and self-cleaning for puddling operation.
- Better inner volume to give higher traction in wet & moist soil conditions.
- Good lateral traction gives operational stability.



| Size    | ALT Size | LI/SI       | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------|----------|-------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 5-12    | -        | 64A6/60A8   | 6  | TT   | 34                   | 4JA           | 15       | 21        | 5         | 62        | 10         | 620            | 51  | 19              |
| 6-12    | -        | 71A6/67A8   | 6  | TT   | 34                   | 5JA           | 19       | 23        | 6         | 68        | 10         | 760            | 38  | 19              |
| 6-14    | -        | 66A6/63A8   | 4  | TL   | 34                   | 5JA           | 21       | 25        | 6         | 74        | 11         | 660            | 28  | 19              |
| 9.5-18  | -        | 105A6/101A8 | 8  | TT   | 57                   | W8            | 60       | 35        | 10        | 106       | 16         | 2040           | 44  | 19              |
| 8.3-20  | -        | 101A6/98A8  | 8  | TT   | 56                   | W7            | 50       | 35        | 8         | 105       | 16         | 1820           | 46  | 19              |
| 9.5-20  | -        | 107A6/103A8 | 8  | TT   | 57                   | W8            | 63       | 38        | 10        | 112       | 17         | 2150           | 41  | 19              |
| 9.5-24  | -        | 111A6/108A8 | 8  | TT   | 56                   | W8            | 74       | 41        | 9         | 124       | 19         | 2400           | 41  | 19              |
| 12.4-24 | -        | 120A6/117A8 | 8  | TT   | 65                   | W11           | 111      | 46        | 12        | 137       | 21         | 3080           | 33  | 19              |
| 13.6-26 | -        | 126A6/123A8 | 8  | TT   | 68                   | W12           | 140      | 50        | 14        | 148       | 23         | 3740           | 32  | 19              |
| 12.4-28 | -        | 131A6/127A8 | 12 | TT   | 65                   | W11           | 129      | 50        | 12        | 148       | 23         | 4290           | 51  | 19              |
| 13.6-28 | -        | 134A6/130A8 | 12 | TT   | 68                   | W12           | 156      | 52        | 14        | 154       | 24         | 4660           | 44  | 19              |
| 14.9-28 | -        | 137A6/133A8 | 12 | TT   | 71                   | W13           | 176      | 54        | 15        | 161       | 25         | 5060           | 38  | 19              |
| 16.9-28 | -        | 143A6/139A8 | 12 | TT   | 73                   | W15L          | 216      | 57        | 17        | 170       | 26         | 6000           | 35  | 19              |



## Unique 23° Lug Design:

- Excellent ground contact.
- Unbeatable traction.

## Strong Nylon Carcass:

- Safeguards the tire against failures.

## Special Tread Compound:

- Ensures longer tire life.



| Size    | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 23.1-26 | -        | 153A8 | 12 | TL   | 54                   | DW20B         | 304      | 63        | 23        | 189       | 28         | 8040           | 25  | 25              |
| 23.1-26 | -        | 159A8 | 16 | TL   | 54                   | DW20B         | 320      | 63        | 23        | 189       | 28         | 9640           | 33  | 25              |
| 23.1-26 | -        | 159A8 | 16 | TL   | 54                   | DW20B         | 316      | 63        | 23        | 189       | 28         | 9640           | 33  | 25              |
| 20.8-38 | -        | 148A8 | 8  | TT   | 53                   | W18A          | 322      | 72        | 21        | 216       | 33         | 6940           | 19  | 25              |
| 20.8-38 | -        | 159A8 | 14 | TL   | 53                   | W18A          | 379      | 72        | 21        | 216       | 33         | 9640           | 33  | 25              |
| 20.8-38 |          | 159A8 | 14 | TT   | 53                   | W18A          | 347      | 72        | 21        | 216       | 33         | 9640           | 33  | 25              |



## Specially Designed to Maximize the Load Capacity:

- Ensure self-cleaning.
- Extensive footprint area for uniform load distribution.
- Better lateral stability on the field.



| Size    | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 24.5-32 | -        | 159A6 | 12 | TL   | 53                   | DW21B         | 440      | 71        | 24        | 212       | 32         | 9640           | 25  | 19              |





## Optimized Tread Design with Extra Deep Tread:

- Excellent traction in flooded soil muddy, sticky soil conditions.
- Longer Tire Life.

## Centre Tie Bar

- Minimizes lug shuffling in operation.
- Strong Lug Base.

## Optimized Lug Spacing (Void ratio):

- Good lateral Traction
- Superior grip
- Outstanding self-cleaning properties due to exclusive tread geometry

## High Inner Volumes:

- Ideal for wet & moist soil conditions

## Superior Tread Compound:

- Minimizes wear/tear in operations.



| Size    | ALT Size | LI/SI           | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------|----------|-----------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 12.4-24 | -        | 117 A8 / 121 A6 | 8  | TT   | 83                   | W11           | 113      | 47        | 12        | 140       | 21         | 2830           | 32  | 25              |
| 13.6-24 | -        | 120 A8 / 123 A6 | 8  | TT   | 88                   | W11           | 133      | 49        | 14        | 147       | 22         | 3080           | 28  | 25              |
| 14.9-24 |          | 124 A8 / 128 A6 | 8  | TT   | 91                   | W13           | 157      | 51        | 15        | 154       | 23         | 3520           | 26  | 25              |
| 23.1-26 |          | 152 A8 / 156 A6 | 14 | TT   | 107                  | DW20B         | 346      | 65        | 23        | 196       | 29         | 7810           | 28  | 25              |
| 18.4-30 |          | 145 A8 / 149 A6 | 12 | TT   | 102                  | DW16A         | 267      | 62        | 18        | 187       | 28         | 6380           | 32  | 25              |
| 23.1-34 |          | 156 A8 / 160 A6 | 14 | TT   | 107                  | DW20B         | 441      | 73        | 23        | 220       | 33         | 8800           | 28  | 25              |



## Unique Mud Breaker:

- Excellent self-cleaning properties during field operation.

## Dual-angle Lug Design:

- Provides unbeatable traction.

## High Non-skid Depth:

- Best-in-class mileage.



| Size     | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 12.4-28  | -        | 125A6 | 12 | TT   | 48                   | W11           | 121      | 50        | 12        | 148       | 23         | 3630           | 36  | 19              |
| 13.6-28  | -        | 128A6 | 12 | TT   | 49                   | W12           | 147      | 52        | 14        | 154       | 24         | 3960           | 33  | 19              |
| 14.9-28  | -        | 134A6 | 12 | TT   | 49                   | W13           | 163      | 54        | 15        | 161       | 25         | 4670           | 33  | 19              |
| 16.9-28  | -        | 143A6 | 12 | TT   | 53                   | W15L          | 207      | 57        | 17        | 169       | 26         | 6000           | 35  | 19              |
| *18.4-30 | -        | 152A8 | 14 | TT   | 52                   | W16L          | 261      | 61        | 18        | 183       | 28         | 7820           | 39  | 25              |

Note: Star marked size is also for Harvester Machinery.



### Deep Tread Depth with high inner volume:

- Excellent Traction.
- Excellent Self-Cleaning Properties.

### Center Tie bar with Strong Lug Base:

- Minimizes lug shuffling in operation.

### Superior Nylon Construction:

- High load carrying capacity.

### Deep Tread:

- Enhanced Performance in both Field and Haulage.
- Improved Mileage.

### CCR (Cut & Chip Resistance) Compound:

- Resistance to Cut & Chip & also minimizes Puncture.



| Size    | ALT Size | LI/SI  | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------|----------|--------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 9.5-24  | -        | 114 A6 | 12 | TT   | 49                   | W8            | 76       | 42        | 10        | 125       | 19         | 2595           | 43  | 19              |
| 13.6-28 | -        | 128A6  | 12 | TT   | 55                   | W12           | 152      | 53        | 14        | 154       | 24         | 3960           | 33  | 19              |
| 14.9-28 | -        | 134A6  | 12 | TT   | 54                   | W13           | 174      | 54        | 15        | 161       | 25         | 4670           | 33  | 19              |
| 16.9-28 |          | 143 A6 | 12 | TT   | 59                   | W15L          | 206      | 57        | 17        | 171       | 26         | 5995           | 35  | 19              |



## Optimum Tread Design:

- Maximum performance in the field and on-road operations.

## First in the Industry with Dual Mud Breakers:

- Ensure better self-cleaning and maximum traction.

## Greater Lug Overlap:

- Provides safe and comfortable ride at high speeds.



| Size               | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|--------------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 600/65R28          | -        | 154D  | -  | TL   | 70                   | DW20B         | 340      | 59        | 24        | 176       | 27         | 8260           | 35  | 40              |
| 600/70R28          | -        | 161D  | -  | TL   | 70                   | DW20B         | 377      | 61        | 24        | 183       | 28         | 10190          | 41  | 40              |
| 600/70R30          | -        | 152D  | -  | TL   | 69                   | DW20B         | 377      | 63        | 24        | 189       | 29         | 7820           | 35  | 40              |
| 600/70R34          | -        | 160D  | -  | TL   | 69                   | DW20B         | 422      | 67        | 24        | 201       | 31         | 9910           | 35  | 40              |
| 650/75R38          | -        | 169D  | -  | TL   | 71                   | DW21B         | 558      | 76        | 26        | 229       | 35         | 12780          | 35  | 40              |
| 710/70R38          | -        | 172D  | -  | TL   | 75                   | DW23B         | 648      | 77        | 28        | 231       | 35         | 13880          | 35  | 40              |
| 710/70R38          | -        | 178D  | -  | TL   | 75                   | DW23B         | 674      | 77        | 28        | 231       | 35         | 16520          | 49  | 40              |
| 650/85R38          | -        | 173D  | -  | TL   | 78                   | DW23B         | 705      | 82        | 27        | 244       | 37         | 14320          | 35  | 40              |
| 650/85R38 (SB, SG) | -        | 173D  | -  | TL   | 78                   | DW23B         | 705      | 82        | 27        | 244       | 37         | 14320          | 35  | 40              |
| 800/70R38          | -        | 178D  | -  | TL   | 78                   | DW27B         | 797      | 82        | 31        | 246       | 37         | 16520          | 35  | 40              |
| 620/70R42          | -        | 166D  | -  | TL   | 69                   | DW20B         | 511      | 76        | 25        | 228       | 35         | 11670          | 35  | 40              |
| 710/70R42          | -        | 173D  | -  | TL   | 75                   | DW23B         | 699      | 81        | 28        | 243       | 37         | 14320          | 35  | 40              |
| 710/70R42 (SB)     | -        | 173D  | -  | TL   | 75                   | DE23B         | 699      | 81        | 28        | 243       | 37         | 14320          | 35  | 40              |
| 710/75R42          | -        | 175D  | -  | TL   | 77                   | DW23B         | 785      | 84        | 28        | 251       | 38         | 15200          | 35  | 40              |
| 620/70R46          | -        | 167D  | -  | TL   | 73                   | DW20B         | 565      | 80        | 25        | 240       | 37         | 12000          | 35  | 40              |

Note: SB- Steel Belted, SG- Stubble Guard



## Optimum Tread Design:

- Maximum performance in the field and on-road operations.

## First in the Industry with Dual Mud Breakers:

- Ensure better self-cleaning.

## Greater Lug Overlap:

- Provides safe and comfortable ride at high speeds.



| Size           | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 420/65R20      | -        | 135D  | -  | TL   | 48                   | W13           | 134      | 42        | 17        | 125       | 19         | 4800           | 35  | 40              |
| 440/65R20      | -        | 138D  | -  | TL   | 56                   | W14L          | 148      | 43        | 18        | 128       | 19         | 5200           | 35  | 40              |
| 440/65R24      | -        | 135D  | -  | TL   | 56                   | W14L          | 169      | 47        | 17        | 139       | 21         | 4800           | 35  | 40              |
| 480/65R24      | -        | 140D  | -  | TL   | 59                   | W15L          | 199      | 49        | 19        | 145       | 22         | 5510           | 35  | 40              |
| 540/65R24      | -        | 146D  | -  | TL   | 63                   | W16L          | 244      | 52        | 21        | 154       | 23         | 6610           | 35  | 40              |
| 540/65R26      | -        | 141 D | -  | TL   | 63                   | W16L          | 256      | 54        | 21        | 161       | 24         | 5670           | 23  | 40              |
| 440/65R28      | -        | 138D  | -  | TL   | 56                   | W14L          | 185      | 51        | 17        | 151       | 23         | 5200           | 35  | 40              |
| 480/65R28      | -        | 142D  | -  | TL   | 59                   | W15L          | 219      | 53        | 19        | 157       | 24         | 5840           | 35  | 40              |
| 540/65R28      | -        | 149D  | -  | TL   | 63                   | W16L          | 271      | 56        | 21        | 166       | 25         | 7160           | 35  | 40              |
| 540/65R28      | -        | 154 D | -  | TL   | 63                   | W16L          | 289      | 56        | 21        | 166       | 25         | 8260           | 46  | 40              |
| 540/65R30      | -        | 150D  | -  | TL   | 63                   | W16L          | 285      | 58        | 21        | 176       | 26         | 7380           | 35  | 40              |
| 540/65R34      | -        | 152D  | -  | TL   | 63                   | W16L          | 309      | 62        | 21        | 184       | 28         | 7820           | 35  | 40              |
| 600/65R34      | -        | 157D  | -  | TL   | 69                   | DW20B         | 390      | 65        | 24        | 194       | 30         | 9090           | 35  | 40              |
| 540/65R38      | -        | 153D  | -  | TL   | 63                   | W16L          | 338      | 66        | 21        | 196       | 30         | 8040           | 35  | 40              |
| 600/65R38      | -        | 159D  | -  | TL   | 69                   | DW20B         | 421      | 69        | 24        | 205       | 32         | 9640           | 35  | 40              |
| 650/65R38      | -        | 163D  | -  | TL   | 74                   | DW20B         | 488      | 71        | 25        | 213       | 33         | 10740          | 35  | 40              |
| 650/65R38 (SB) | -        | 171D  | -  | TL   | 74                   | DW20B         | 525      | 71        | 25        | 213       | 33         | 13550          | 52  | 40              |
| 650/65R42      |          | 165D  |    | TL   | 74                   | DW20B         | 530      | 75        | 25        | 229       | 35         | 11350          | 35  | 40              |

Note: SB- Steel Belted





## Tractor Tires Designed with a Unique Mud Breaker:

- Low soil compaction.
- High traction.
- Excellent driving experience.



| Size               | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|--------------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 360/70R20          | -        | 129D  | -  | TL   | 52                   | W11           | 111      | 41        | 14        | 123       | 19         | 4070           | 35  | 40              |
| 380/70R20          | -        | 122D  | -  | TL   | 52                   | W12           | 125      | 43        | 15        | 127       | 19         | 3300           | 23  | 40              |
| 320/70R24          | -        | 116D  | -  | TL   | 51                   | W10           | 105      | 43        | 13        | 129       | 20         | 2760           | 23  | 40              |
| 360/70R24          | -        | 122D  | -  | TL   | 52                   | W11           | 135      | 45        | 14        | 136       | 21         | 3310           | 23  | 40              |
| 380/70R24          | -        | 125D  | -  | TL   | 52                   | W12           | 145      | 47        | 15        | 140       | 21         | 3640           | 23  | 40              |
| 420/70R24          | -        | 130D  | -  | TL   | 56                   | W13           | 178      | 49        | 16        | 147       | 22         | 4190           | 23  | 40              |
| 420/70R24          | -        | 130D  | -  | TL   | 56                   | W13           | 178      | 49        | 16        | 147       | 22         | 4190           | 23  | 40              |
| 480/70R24 (SB, SG) | -        | 138D  | -  | TL   | 61                   | W15L          | 220      | 52        | 19        | 155       | 24         | 5200           | 23  | 40              |
| 360/70R28          | -        | 125D  | -  | TL   | 52                   | W11           | 150      | 49        | 14        | 147       | 23         | 3640           | 23  | 40              |
| 380/70R28          | -        | 127D  | -  | TL   | 52                   | W12           | 162      | 51        | 15        | 152       | 23         | 3860           | 23  | 40              |
| 420/70R28          | -        | 133D  | -  | TL   | 56                   | W13           | 195      | 53        | 16        | 159       | 24         | 4540           | 23  | 40              |
| 480/70R28          | -        | 140D  | -  | TL   | 61                   | W15L          | 245      | 56        | 19        | 167       | 26         | 5510           | 23  | 40              |
| 420/70R30          | -        | 134D  | -  | TL   | 56                   | W13           | 211      | 55        | 16        | 165       | 25         | 4670           | 23  | 40              |
| 480/70R30          | -        | 141D  | -  | TL   | 61                   | W15L          | 257      | 58        | 19        | 174       | 27         | 5680           | 23  | 40              |
| 480/70R34          | -        | 143D  | -  | TL   | 61                   | W15L          | 283      | 62        | 19        | 186       | 29         | 6010           | 23  | 40              |
| 480/70R34 (SB, SG) | -        | 157D  | -  | TL   | 63                   | W15L          | 318      | 62        | 19        | 187       | 29         | 9090           | 52  | 40              |
| 520/70R34          | -        | 148D  | -  | TL   | 68                   | W16L          | 331      | 65        | 20        | 193       | 30         | 6940           | 23  | 40              |
| 400/75R38          | 15.5R38  | 138D  | -  | TL   | 61                   | W13           | 224      | 62        | 16        | 185       | 29         | 5200           | 23  | 40              |
| 480/70R38          | -        | 145D  | -  | TL   | 61                   | W15L          | 308      | 66        | 19        | 198       | 31         | 6390           | 23  | 40              |
| 520/70R38          | -        | 150D  | -  | TL   | 68                   | W16L          | 364      | 69        | 20        | 206       | 32         | 7390           | 23  | 40              |
| 580/70R38          | -        | 155D  | -  | TL   | 73                   | DW18L         | 451      | 72        | 23        | 215       | 33         | 8540           | 23  | 40              |
| 580/70R38 (SB)     | -        | 180D  | -  | TL   | 73                   | DW18L         | 493      | 72        | 23        | 215       | 33         | 8540           | 80  | 40              |

Note: SB- Steel Belted, SG- Stubble Guard



## Tractor Tires Designed with a Unique Mud Breaker:

- Low soil compaction.
- High traction.
- Excellent driving experience.



| Size               | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|--------------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 380/80R38          | 14.9R38  | 142D  | -  | TL   | 58                   | W12           | 217      | 62        | 15        | 185       | 29         | 5840           | 35  | 40              |
| 380/80R38 (SB, SG) | 14.9R38  | 152D  | -  | TL   | 58                   | W12           | 248      | 62        | 15        | 186       | 29         | 7820           | 58  | 40              |
| 480/80R42          | 18.4R42  | 156D  | -  | TL   | 68                   | DW16L         | 376      | 73        | 19        | 217       | 34         | 8810           | 23  | 40              |
| 480/80R46          | 16.9R46  | 159D  | -  | TL   | 64                   | W13           | 330      | 72        | 16        | 218       | 34         | 9640           | 35  | 40              |
| 480/80R46          | 18.4R46  | 158D  | -  | TL   | 68                   | DW16L         | 415      | 77        | 19        | 229       | 36         | 9360           | 35  | 40              |
| 480/80R50          | 18.4R50  | 159D  | -  | TL   | 68                   | DW16L         | 459      | 81        | 19        | 241       | 38         | 9640           | 35  | 40              |
| 480/80R50          | 18.4R50  | 165D  | -  | TL   | 68                   | DW16L         | 472      | 81        | 19        | 241       | 38         | 11340          | 46  | 40              |

Note: SB- Steel Belted, SG- Stubble Guard



## Tractor Tires Designed with a Unique Mud Breaker:

- Low soil compaction.
- High traction.
- Excellent driving experience.



| Size              | ALT Size | LI/SI | PR | Type | Tread Depth (32nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-------------------|----------|-------|----|------|---------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 250/85R20         | 9.5R20   | 116D  | -  | TL   | 47                  | W8            | 66       | 37        | 10        | 110       | 17         | 2750           | 35  | 40              |
| 280/85R20         | 11.2R20  | 116D  | -  | TL   | 48                  | W10           | 81       | 39        | 11        | 116       | 17         | 2750           | 28  | 40              |
| 320/85R20         | 12.4R20  | 119D  | -  | TL   | 52                  | W11           | 102      | 41        | 13        | 124       | 19         | 3000           | 23  | 40              |
| 250/85R24         | 9.5R24   | 109D  | -  | TL   | 48                  | W8            | 81       | 41        | 10        | 122       | 19         | 2270           | 23  | 40              |
| 280/85R24         | 11.2R24  | 115D  | -  | TL   | 51                  | W10           | 95       | 43        | 12        | 128       | 20         | 2680           | 23  | 40              |
| 280/85R24 (SB)    | 11.2R24  | 130 D | -  | TL   | 51                  | W10           | 126      | 43        | 12        | 128       | 20         | 4190           | 58  | 40              |
| 320/85R24         | 12.4R24  | 122D  | -  | TL   | 52                  | W11           | 117      | 45        | 13        | 136       | 21         | 3300           | 23  | 40              |
| 340/85R24         | 13.6R24  | 125D  | -  | TL   | 54                  | W12           | 135      | 47        | 14        | 140       | 21         | 3630           | 23  | 40              |
| 380/85R24         | 14.9R24  | 131D  | -  | TL   | 56                  | W12           | 162      | 49        | 16        | 148       | 22         | 4300           | 23  | 40              |
| 420/85R24         | 16.9R24  | 137D  | -  | TL   | 58                  | W15L          | 205      | 52        | 17        | 156       | 24         | 5070           | 23  | 40              |
| 420/85R26         | 16.9R26  | 143 D | -  | TL   | 58                  | W15L          | 226      | 54        | 17        | 162       | 25         | 6000           | 35  | 40              |
| 250/85R28         | 9.5R28   | 112 D |    | TL   | 48                  | W8            | 85       | 45        | 10        | 134       | 21         | 2470           | 23  | 40              |
| 280/85R28         | 11.2R28  | 118D  | -  | TL   | 51                  | W10           | 107      | 47        | 11        | 140       | 22         | 2910           | 23  | 40              |
| 320/85R28         | 12.4R28  | 124D  | -  | TL   | 52                  | W11           | 131      | 49        | 13        | 148       | 23         | 3520           | 23  | 40              |
| 340/85R28         | 13.6R28  | 127D  | -  | TL   | 54                  | W12           | 150      | 51        | 14        | 152       | 23         | 3850           | 23  | 40              |
| 380/85R28         | 14.9R28  | 133D  | -  | TL   | 56                  | W12           | 182      | 53        | 15        | 160       | 24         | 4540           | 23  | 40              |
| 380/85R28         | 14.9R28  | 141D  | -  | TL   | 56                  | W12           | 198      | 53        | 15        | 160       | 24         | 5670           | 38  | 40              |
| 420/85R28         | 16.9R28  | 139D  | -  | TL   | 58                  | W15L          | 227      | 56        | 17        | 168       | 26         | 5350           | 23  | 40              |
| 380/85R30         | 14.9R30  | 135D  | -  | TL   | 56                  | W12           | 197      | 55        | 15        | 166       | 26         | 4806           | 23  | 40              |
| 420/85R30         | 16.9R30  | 140D  | -  | TL   | 58                  | W15L          | 235      | 58        | 17        | 174       | 27         | 5510           | 23  | 40              |
| 460/85R30         | 18.4R30  | 145D  | -  | TL   | 62                  | W16L          | 286      | 61        | 19        | 182       | 28         | 6390           | 23  | 40              |
| 320/85R32         | 12.4R32  | 126D  | -  | TL   | 52                  | W11           | 149      | 53        | 13        | 160       | 25         | 3740           | 23  | 40              |
| 320/85R32(SB)     | 12.4R32  | 145D  | -  | TL   | 52                  | W11           | 167      | 54        | 13        | 160       | 25         | 6390           | 64  | 40              |
| 380/85R34 (SB,SG) | 14.9R34  | 137D  | -  | TL   | 56                  | W12           | 214      | 59        | 15        | 178       | 28         | 5071           | 23  | 40              |
| 420/85R34 (SB,SG) | 16.9R34  | 142D  | -  | TL   | 58                  | W15L          | 258      | 62        | 17        | 187       | 29         | 5840           | 23  | 40              |
| 420/85R34         | 16.9R34  | 152D  | -  | TL   | 58                  | W15L          | 291      | 62        | 17        | 187       | 29         | 7820           | 44  | 40              |
| 460/85R34         | 18.4R34  | 147D  | -  | TL   | 62                  | W16L          | 299      | 65        | 19        | 194       | 30         | 6770           | 23  | 40              |
| 320/85R36         | 12.4R36  | 128D  | -  | TL   | 52                  | W11           | 164      | 57        | 13        | 172       | 27         | 3960           | 23  | 40              |
| 320/85R36         | 12.4R36  | 148D  | -  | TL   | 52                  | W11           | 173      | 57        | 13        | 172       | 27         | 6940           | 67  | 40              |
| 340/85R36         | 13.6R36  | 132D  | -  | TL   | 54                  | W12           | 186      | 59        | 14        | 176       | 27         | 4410           | 23  | 40              |
| 320/85R38         | 12.4R38  | 143D  | -  | TL   | 52                  | W11           | 177      | 59        | 13        | 178       | 28         | 6000           | 52  | 40              |
| 340/85R38         | 13.6R38  | 133D  |    | TL   | 54                  | W12           | 192      | 61        | 14        | 182       | 28         | 4540           | 23  | 40              |

Note: SB- Steel Belted, SG- Stubble Guard

# TDR 850 - [R-1W] [TL]



Tractor



| Size              | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-------------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 380/85R38         | 14.9R28  | 141D  | -  | TL   | 56                   | W12           | 198      | 53        | 15        | 160       | 24         | 5670           | 38  | 40              |
| 420/85R38         | 16.9R38  | 144D  | -  | TL   | 58                   | W15L          | 278      | 66        | 17        | 198       | 31         | 6170           | 23  | 40              |
| 460/85R38         | 18.4R38  | 149D  | -  | TL   | 62                   | W16L          | 327      | 69        | 19        | 206       | 32         | 7160           | 23  | 40              |
| 460/85R38 (SB)    | 18.4R38  | 167 D | -  | TL   | 67                   | W16L          | 397      | 69        | 19        | 206       | 32         | 12015          | 64  | 50              |
| 460/85R38 (SB,SG) | 18.4R38  | 149D  | -  | TL   | 62                   | W16L          | 351      | 69        | 19        | 206       | 32         | 7160           | 23  | 40              |
| 520/85R38         | 20.8R38  | 155D  | -  | TL   | 68                   | DW16L         | 426      | 73        | 21        | 218       | 33         | 8540           | 23  | 40              |
| 520/85R42         | 20.8R42  | 157D  | -  | TL   | 68                   | DW16L         | 431      | 77        | 21        | 230       | 35         | 9090           | 23  | 40              |
| 520/85R42         | 20.8R42  | 165D  | -  | TL   | 68                   | DW16L         | 150      | 77        | 20        | 230       | 35         | 11340          | 41  | 40              |
| 520/85R42         | 20.8R42  | 169D  | -  | TL   | 68                   | DW16L         | 462      | 77        | 20        | 230       | 35         | 12780          | 49  | 40              |
| 520/85R46         | 20.8R46  | 158D  | -  | TL   | 68                   | DW16L         | 493      | 81        | 21        | 242       | 37         | 9360           | 23  | 40              |
| 520/85R46         | 20.8R46  | 169D  |    | TL   | 68                   | DW16L         | 550      | 81        | 20        | 242       | 37         | 12780          | 46  | 40              |

Note: SB- Steel Belted, SG- Stubble Guard



## Advanced Tread design with Wider & longer footprint:

- More Gripping Edge.
- Excellent Traction with minimum amount of slip.
- Reduce Soil stress, Compaction & improved yields.
- More no of lugs acting together at same time, deliver more tractive force.

## Advance VF technology- Built with Strong shoulder with higher draft angle and base radius:

- Built to handle 40% more load than a conventional radial tire, or the same load at 40% lower pressure.

## Overlap of lugs:

- Leads to a comfortable and smooth drive on road.

## SSR compound (Special Stubble Resistant):

- Longer Tire Life and defense against stubble which provides better protection on field.

## Extra Strong Casing with High Performance Steel belts:

- Radially stiffer carcass ,enough to absorb impact and stress and returns its original shape.
- SB offers better impact resistance and exceptional



| Size                  | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Alternate Rim | NRO         | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-----------------------|----------|-------|----|------|----------------------|---------------|---------------|-------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| VF 600/60R28 NRO (SB) | -        | 160 D | -  | TL   | 63                   | DW20B         | DW21B         | DW18L       | 350      | 56        | 24        | 169       | 26         | 9910           | 29  | 40              |
| VF 600/65R28 NRO (SB) | -        | 163D  | -  | TL   | 63                   | DW21B         | DW20B         | DW20B       | 380      | 59        | 24        | 176       | 27         | 10740          | 29  | 40              |
| VF 540/65R30 NRO (SB) |          | 161 D |    | TL   | 61                   | DW20B         | W18L DW18L    | W16L        | 325      | 58        | 21        | 173       | 26         | 10190          | 35  | 40              |
| VF 600/60R30 NRO (SB) | -        | 162D  | -  | TL   | 63                   | DW20B         | DW21B         | DW18L       | 361      | 58        | 24        | 175       | 27         | 10460          | 29  | 40              |
| VF 600/65R30 NRO (SB) | -        | 161 D | -  | TL   | 63                   | DW21B         | -             | DW20B       | 396      | 64        | 24        | 182       | 28         | 10190          | 23  | 40              |
| VF 600/70R30 NRO (SB) | -        | 170D  | -  | TL   | 71                   | DW21B         | DW20B         | DW20B       | 476      | 63        | 24        | 189       | 29         | 13230          | 35  | 40              |
| VF 710/55R30 NRO (SB) | -        | 165 D | -  | TL   | 69                   | DW25B         | W12 DW12 DW13 | DW23B DW24B | 460      | 61        | 28        | 183       | 28         | 11340          | 23  | 40              |
| VF 380/85R34 (SB)     | -        | 149 D | -  | TL   | 58                   | W13           | DW14L         | -           | 243      | 59        | 15        | 178       | 27         | 7160           | 23  | 40              |
| VF 420/85R34 (SB)     | -        | 159 D | -  | TL   | 60                   | DW15L         | DW21B         | -           | 305      | 62        | 17        | 187       | 29         | 9640           | 35  | 40              |
| VF 600/60R34 (SB)     | -        | 160 D | -  | TL   | 63                   | DW20B         | DW20B         | -           | 396      | 62        | 24        | 187       | 29         | 9910           | 23  | 40              |
| VF 600/70R34 NRO (SB) | -        | 170 D |    | TL   | 71                   | DW21B         | DW21B         | DW20B       | 520      | 67        | 24        | 202       | 31         | 13220          | 29  | 40              |

Note: VF- Very High Flexion, SB- Steel Belted, SG- Steel Guard, NRO: Narrow Rim Option



# VDR 2000 - [R-1W] [TL]



Tractor



| Size                  | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Alternate Rim     | NRO   | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-----------------------|----------|-------|----|------|----------------------|---------------|-------------------|-------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| VF 650/60R34 NRO (SB) | -        | 168 D | -  | TL   | 71                   | DW23B         | DW21B             | DW20B | 488      | 65        | 26        | 194       | 29         | 12330          | 29  | 40              |
| VF 650/65R34 NRO (SB) | -        | 170 D | -  | TL   | 74                   | DW23B         | DW21B             | DW20B | 551      | 67        | 26        | 202       | 31         | 13220          | 29  | 40              |
| VF 710/60R34 NRO (SB) | -        | 173 D | -  | TL   | 68                   | DW25B         | DW24B DW27B       | DW23B | 546      | 68        | 28        | 203       | 31         | 14320          | 29  | 40              |
| VF 380/80R38 (SB)     | -        | 167D  | -  | TL   | 59                   | DW12          | W12               | -     | 287      | 62        | 15        | 186       | 29         | 12000          | 64  | 40              |
| VF 380/95R38 NRO (SB) |          | 159 D |    | TL   | 61                   | W13           | W12               | W12   | 317      | 66        | 15        | 199       | 31         | 9640           | 35  | 40              |
| VF 420/85R38 (SB)     | -        | 155 D | -  | TL   | 61                   | DW15L         | DW14L             | -     | 341      | 66        | 17        | 198       | 31         | 8540           | 23  | 40              |
| VF 650/65R38 (SB)     | -        | 180D  | -  | TL   | 74                   | DW23B         | DW21B             | -     | 592      | 71        | 26        | 214       | 33         | 17620          | 46  | 40              |
| VF 650/85R38 (SB)     | -        | 182 D | -  | TL   | 78                   | DW23B         | DW20B DW23B       | DW23B | 780      | 82        | 26        | 244       | 37         | 18720          | 29  | 40              |
| VF 710/60R38 NRO (SB) | -        | 174D  | -  | TL   | 68                   | DW25B         | DW24B DW27B       | DW23B | 567      | 72        | 28        | 215       | 33         | 14760          | 29  | 40              |
| VF 710/70R38 NRO (SB) | -        | 181 D | -  | TL   | 79                   | DW25B         | DW24B DW23B       | DW27B | 561      | 77        | 28        | 232       | 35         | 18170          | 29  | 40              |
| VF 800/70R38 NRO (SB) | -        | 187D  | -  | TL   | 76                   | DW28B         | DW25B DW27B DW30B | DW20B | 937      | 82        | 32        | 247       | 37         | 21480          | 29  | 40              |
| VF 650/65R42 NRO (SB) | -        | 174D  | -  | TL   | 74                   | DW23B         | DW21B             | DW23B | 607      | 75        | 26        | 226       | 35         | 14760          | 29  | 43              |
| VF 710/60R42 NRO (SB) | -        | 176D  | -  | TL   | 68                   | DW25B         | DW24B DW27B       | DW23B | 613      | 76        | 28        | 227       | 35         | 15640          | 29  | 43              |
| VF 710/70R42 NRO (SB) | -        | 185 D | -  | TL   | 79                   | DW25B         | DW23B DW24B       | DW28B | 613      | 81        | 28        | 244       | 37         | 20370          | 35  | 40              |
| VF 900/60R42 NRO (SB) | -        | 189 D | -  | TL   | 77                   | DW30B         | -                 | -     | 1032     | 85        | 35        | 253       | 39         | 22690          | 29  | 40              |
| VF 750/70R44 (SB)     |          | 186 D |    | TL   | 84                   | DW25B         | -                 | -     | 955      | 85        | 29        | 255       | 39         | 20930          | 29  | 40              |
| VF 380/85R46 (SB)     |          | 162 D |    | TL   | 58                   | W13           | DW12 W12 DW13     | DW16L | 338      | 71        | 15        | 214       | 34         | 10460          | 41  | 40              |
| VF 480/80R46 NRO (SB) |          | 177 D |    | TL   | 66                   | DW16L         | DW15L             | DW15L | 472      | 76        | 19        | 229       | 35         | 16080          | 52  | 40              |
| VF 480/95R54 NRO (SB) |          | 180 D |    | TL   | 67                   | DW16L         | DW15L             |       | 648      | 90        | 19        | 648       | 42         | 17620          | 41  | 40              |

Note: VF-Very High Flexion, SB-Steel Belted, SG-Stubble Guard, CFO-Cyclical Field Operation , NRO- Narrow Rim Option

# VDR 2000 - [R-1W] [TL]



Tractor



| Size                  | Pref Rim | Alt Rim           | Type | Tread Depth<br>(32 nds) | Wt (lbs) | Unloaded Dimension    |    | RC inches | SLR inches | LI/SI  | Psi | Recommended load, (lbs) |       |       |              |              |       |       |
|-----------------------|----------|-------------------|------|-------------------------|----------|-----------------------|----|-----------|------------|--------|-----|-------------------------|-------|-------|--------------|--------------|-------|-------|
|                       |          |                   |      |                         |          | Speed (mph)           |    |           |            |        |     |                         |       |       |              |              |       |       |
|                       |          |                   |      |                         |          | Harvester Application |    |           |            |        |     | CFO                     |       |       |              |              |       |       |
|                       |          |                   |      |                         |          | 6                     | 16 |           |            |        |     | 19                      | 25    | 31    | Upto 15 Cyc. | Upto 30 Cyc. |       |       |
| VF 600/65R28 CFO (SB) | DW21B    | DW20B             | TL   | 63                      | 408      | 24                    | 59 | 176       | 27         | 166A8  | 35  | 11780                   | 11040 | 10930 | 11670        | 10700        | 15810 | 13260 |
| VF 540/65R30 CFO (SB) | DW20B    | W18L DW18L        | TL   | 61                      | 351      | 21                    | 58 | 173       | 26         | 161 A8 | 35  | 10260                   | 9630  | 9520  | 10190        | 9340         | 13810 | 11560 |
| VF 710/70R38 CFO (SB) | DW25B    | DW24B DW23B       | TL   | 79                      | 772      | 28                    | 77 | 232       | 35         | 183 A8 | 35  | 19450                   | 18220 | 18040 | 19270        | 17690        | 26120 | 21870 |
| VF 800/70R38 CFO (SB) | DW28B    | DW25B DW27B DW30B | TL   | 79                      | 941      | 32                    | 82 | 247       | 37         | 190A8  | 35  | 23550                   | 22050 | 21830 | 23350        | 21410        | 31630 | 26500 |
| VF 710/70R42 CFO (SB) | DW25B    | DW23B DW24B       | TL   | 79                      | 838      | 28                    | 81 | 244       | 37         | 190 A8 | 46  | 23550                   | 22050 | 21830 | 23350        | 21410        | 31630 | 26500 |

Note: VF-Very High Flexion, SB-Steel Belted, SG-Stubble Guard, CFO-Cyclical Field Operation , NRO- Narrow Rim Option



## Multi-angle Tread Pattern:

- Distinctive shoulder design provides high traction.
- Dual mud breaker ensures better self-cleaning properties.

## Handling & Comfort:

- Larger footprint ensures better stability on-field and on-road.
- Safeguards comforts on all surfaces.



| Size      | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-----------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 240/70R16 | -        | 104D  | -  | TL   | 34                   | W8            | 43       | 29        | 10        | 87        | 13         | 1980           | 35  | 40              |
| 260/70R16 | -        | 109D  | -  | TL   | 35                   | W8            | 49       | 30        | 10        | 91        | 14         | 2270           | 35  | 40              |
| 280/70R16 | -        | 112D  | -  | TL   | 37                   | W9            | 55       | 31        | 11        | 94        | 14         | 2470           | 35  | 40              |
| 320/65R16 | -        | 117D  | -  | TL   | 38                   | W10           | 66       | 32        | 13        | 97        | 15         | 2835           | 35  | 40              |
| 280/70R18 | -        | 114D  | -  | TL   | 37                   | W9            | 59       | 33        | 11        | 100       | 15         | 2600           | 35  | 40              |
| 320/65R18 | -        | 109 D | -  | TL   | 38                   | 38            | 71       | 34        | 13        | 103       | 16         | 2270           | 23  | 40              |
| 340/65R18 | -        | 113D  | -  | TL   | 39                   | W11           | 76       | 35        | 14        | 106       | 16         | 2530           | 23  | 40              |
| 260/70R20 | -        | 113D  | -  | TL   | 35                   | W8            | 57       | 34        | 10        | 103       | 16         | 2530           | 35  | 40              |
| 280/70R20 | -        | 116D  | -  | TL   | 37                   | W9            | 65       | 35        | 11        | 106       | 16         | 2750           | 35  | 40              |
| 300/70R20 | -        | 120D  | -  | TL   | 38                   | W9            | 74       | 37        | 12        | 112       | 17         | 3080           | 35  | 40              |
| 320/70R20 | -        | 123D  | -  | TL   | 39                   | W10           | 78       | 39        | 13        | 116       | 18         | 3410           | 35  | 40              |



## Narrow & Sprayer Tires Designed with a Unique Mud Breaker:

- High load-carrying capacity for smooth operations.
- High traction.
- Ensures soil protection and provides better roadability.



| Size           | ALT Size | LI/SI      | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------------|----------|------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 210/90R24      | 8.3R24   | 107 A8/B   | -  | TL   | 40                   | W7            | 63       | 39        | 8         | 116       | 18         | 2150           | 35  | 31              |
| 210/95R28      | 8.3R28   | 116 A8/B   | -  | TL   | 40                   | W7            | 72       | 44        | 8         | 131       | 20         | 2750           | 44  | 31              |
| 420/90R30      | -        | 147A8/B    | -  | TL   | 62                   | DW13          | 241      | 60        | 17        | 179       | 27         | 6779           | 35  | 31              |
| 210/95R32      | 8.3R32   | 116D/119A8 | -  | TL   | 40                   | W7            | 80       | 48        | 8         | 143       | 22         | 2756           | 39  | 40              |
| 230/95R32      | 9.5R32   | 128D       | -  | TL   | 43                   | W7            | 92       | 49        | 9         | 147       | 23         | 3960           | 58  | 40              |
| 270/95 R32     | 11.2R32  | 136D       | -  | TL   | 46                   | W9            | 119      | 52        | 11        | 156       | 24         | 4938           | 58  | 40              |
| 320/85R34      | 12.4R34  | 141D       | -  | TL   | 48                   | W11           | 150      | 55        | 13        | 166       | 26         | 5677           | 52  | 31              |
| 230/95R36      | 9.5R36   | 130D       | -  | TL   | 43                   | W7            | 102      | 53        | 9         | 159       | 25         | 4190           | 58  | 40              |
| 270/95R36      | 11.2R36  | 139D       | -  | TL   | 46                   | W9            | 131      | 56        | 11        | 168       | 26         | 5350           | 58  | 40              |
| 270/95R38      | 11.2R38  | 140D       | -  | TL   | 46                   | W9            | 136      | 58        | 11        | 174       | 27         | 5510           | 58  | 40              |
| 380/95R38      | -        | 147D/150A8 | -  | TL   | 61                   | W12           | 241      | 66        | 15        | 199       | 31         | 6779           | 35  | 40              |
| 230/95R40      | 9.5R40   | 132D/135A8 | -  | TL   | 43                   | W7            | 111      | 57        | 9         | 171       | 27         | 4409           | 58  | 40              |
| 230/95R42      | 9.5R42   | 133D       | -  | TL   | 43                   | W7            | 114      | 59        | 9         | 177       | 28         | 4540           | 58  | 40              |
| 270/95R42      | 11.2R42  | 139D       | -  | TL   | 46                   | W9            | 145      | 62        | 11        | 186       | 29         | 5350           | 49  | 40              |
| 320/80R42      | 12.4R42  | 141A8/141B | -  | TL   | 48                   | W10           | 168      | 62        | 13        | 186       | 29         | 5677           | 46  | 31              |
| 320/90R42      | 12.4R42  | 144D/147A8 | -  | TL   | 48                   | W10           | 188      | 65        | 13        | 193       | 30         | 6173           | 46  | 40              |
| 210/95R44      | 8.3R44   | 126 D      | -  | TL   | 40                   | W7            | 103      | 60        | 8         | 179       | 29         | 3740           | 52  | 40              |
| 230/95R44      | 9.5R44   | 134D       | -  | TL   | 43                   | W7            | 120      | 61        | 9         | 183       | 29         | 4670           | 58  | 40              |
| 270/95R44      | 11.2R44  | 142D       | -  | TL   | 46                   | W9            | 153      | 64        | 11        | 192       | 30         | 5840           | 58  | 40              |
| 300/95R46      | 12.4R46  | 148D       | -  | TL   | 48                   | W9            | 188      | 68        | 12        | 205       | 32         | 6940           | 58  | 40              |
| 320/90R46      | 12.4R46  | 148D       | -  | TL   | 48                   | W10           | 195      | 69        | 13        | 205       | 32         | 6940           | 52  | 40              |
| 340/85R46      | 13.6R46  | 150 D      | -  | TL   | 48                   | W12           | 218      | 69        | 14        | 206       | 32         | 7380           | 52  | 40              |
| 380/90R46 (SB) | 14.9R46  | 159D       | -  | TL   | 51                   | W12           | 307      | 73        | 15        | 218       | 34         | 9640           | 58  | 40              |
| 380/90R46 (SB) | 14.9R46  | 173D       | -  | TL   | 51                   | W12           | 341      | 73        | 15        | 218       | 34         | 14320          | 88  | 40              |
| 230/95R48      | 9.5R48   | 136D       | -  | TL   | 43                   | W7            | 130      | 65        | 9         | 195       | 31         | 4930           | 58  | 40              |
| 270/95R48      | 11.2R48  | 144D       | -  | TL   | 46                   | W9            | 165      | 68        | 11        | 204       | 32         | 6170           | 58  | 40              |
| 340/85R48      | 13.6R48  | 151D       | -  | TL   | 48                   | W12           | 218      | 71        | 14        | 212       | 33         | 7600           | 52  | 40              |
| 320/90R50      | 12.4R50  | 150D       | -  | TL   | 48                   | W10           | 212      | 73        | 13        | 217       | 34         | 7380           | 52  | 40              |
| 480/95R50      | -        | 164D/167A8 | -  | TL   | 67                   | W15L          | 462      | 86        | 19        | 257       | 40         | 11023          | 35  | 40              |
| 300/95R52 (SB) | 12.4R52  | 156D       | -  | TL   | 48                   | W9            | 245      | 74        | 12        | 223       | 35         | 8810           | 70  | 40              |
| 270/95R54 (SB) | 11.2R54  | 156D       | -  | TL   | 46                   | W9            | 217      | 74        | 11        | 222       | 35         | 8810           | 81  | 40              |

Note: SB- Steel Belted



## Advance VF technology:

- Built to handle 40% more load than a conventional radial tire, or the same load at 40% lower pressure.

## Extra Strong Casing with High Performance Steel belts:

- Provides exceptional puncture resistance, with even footprint to disperse load equally.
- SB offers better impact resistance & defence against stubble to enhance tire durability.

## Stronger lugs with larger Contact Patch:

- Excellent traction which decreases slippage, delivers lower fuel consumption, and increases overall productivity.
- Better Roadability.

## Designed with a unique mud breaker:

- Self cleaning and reinforcement to lugs.

## Reinforced sidewalls and bead zones:

- Increased casing stiffness to carry extra load and easy of fitment.



| Size                | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| VF580/85R42 (SB)    | -        | 183 D | -  | TL   | 71                   | DW20B         | 623      | 80        | 23        | 241       | 37         | 19290          | 41  | 40              |
| VF380/90R46 (SB)    | -        | 173 D | -  | TL   | 59                   | W13           | 334      | 73        | 15        | 219       | 34         | 14320          | 64  | 40              |
| VF520/85R46 (SB)    | -        | 173 D | -  | TL   | 67                   | DW18L         | 518      | 81        | 21        | 243       | 37         | 14330          | 29  | 40              |
| VF320/90R50 (SB)    | -        | 169 D | -  | TL   | 56                   | W11           | 274      | 73        | 13        | 218       | 34         | 12787          | 70  | 40              |
| VF380/90R50 (SB)    | -        | 175 D | -  | TL   | 59                   | W13           | 376      | 77        | 15        | 231       | 36         | 15212          | 64  | 40              |
| VF 380/105R50 (SB)  | -        | 179 D | -  | TL   | 60                   | W13           | 431      | 81        | 15        | 244       | 38         | 17086          | 64  | 40              |
| VF 420/95R50 (SB)   | -        | 177 D | -  | TL   | 62                   | W14L          | 420      | 81        | 16        | 244       | 38         | 16094          | 52  | 40              |
| VF480/80R50 (SB)    | -        | 179 D | -  | TL   | 66                   | DW16L         | 486      | 80        | 19        | 241       | 38         | 17086          | 52  | 40              |
| VF480/95R50 (SB)    | -        | 176 D | -  | TL   | 67                   | DW16L         | 535      | 86        | 19        | 258       | 40         | 15653          | 35  | 40              |
| VF250/115R54 (SB) # | -        | 151 D | -  | TL   | 58                   | W8            | 237      | 77        | 10        | 230       | 36         | 7600           | 38  | 40              |
| VF320/90R54 (SB)    | -        | 168 D | -  | TL   | 56                   | W11           | 289      | 77        | 13        | 230       | 36         | 12330          | 64  | 40              |
| VF 380/90R54 (SB)   | -        | 176 D | -  | TL   | 59                   | W13           | 406      | 81        | 15        | 243       | 38         | 15640          | 64  | 40              |
| VF380/105R54 (SB)   | -        | 180 D | -  | TL   | 60                   | W13           | 445      | 85        | 15        | 256       | 40         | 17637          | 64  | 40              |

Note: VF- Very High Flexion SB- Steel Belted

Note: # VF 250/115R54 size replaces VF 230/115R54





## Advance VF Technology:

- Built to handle 40% more load than a conventional radial tire, or the same load at 40% lower pressure.

## Directional Lug with Continuous Center Support:

- Excellent traction which decreases slippage, delivers lower fuel consumption, and increases overall productivity.
- Better Roadability.

## Reinforced Sidewalls and Bead Zones:

- Increased casing stiffness to carry extra load and easy of fitment.

## Extra Strong Casing with High Performance Steel Belts:

- Provides exceptional puncture resistance, with even footprint to disperse load equally.
- SB offers better impact resistance and defence against stubble to enhance tire durability.



| Size             | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|------------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| VF380/90R46 (SB) | -        | 173D  | -  | TL   | 49                   | W13           | 350      | 73        | 15        | 219       | 34         | 14320          | 64  | 40              |

Note: VF- Very High Flexion SB- Steel Belted



### Multi-block tread design with Wider footprint:

- Tread design gives wider footprint and gives excellent grip on/off road application even winter condition.
- Offset shoulder block design gives stable and comfortable driving response both ON/OFF road.

### Unique Center Lug:

- Provides Stability and a smooth, comfortable ride on hard surfaces, soft conditions even in mud and snow.

### High number of blocks with high rubber-to-void ratio:

- Provides low tire vibration and stable ride.

### Extra Strong Casing Equipped with Steel Belts:

- Higher load-carrying capacity in all applications & Improved Puncture resistance.

### Special Tread Compound:

- Longer Tire Life and provides even wear both on the road and in the field.



| Size           | ALT Size   | LI/SI      | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------------|------------|------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 250/75R16 SB   | -          | 120G       |    | TL   | 19                   | W8            | 49       | 31        | 10        | 92        | 14         | 3080           | 65  | 56              |
| 340/80R18 (SB) | 12.5R18    | 143A8/138D | -  | TL   | 32                   | 11            | 122      | 39        | 14        | 118       | 18         | 5200           | 58  | 40              |
| 340/80R20 (SB) | 12.5R20    | 144A8/141D |    | TL   | 44                   | 11X20         | 134      | 41        | 14        | 124       | 19         | 5510           | 58  | 40              |
| 360/80R20 (SB) | 13.6R20    | 147A8/143D | -  | TL   | 33                   | 11            | 141      | 43        | 14        | 128       | 19         | 6000           | 58  | 40              |
| 400/70R20 (SB) | 16.0/70R20 | 149A8/144D | -  | TL   | 32.8                 | 13            | 152      | 42        | 16        | 126       | 19         | 6170           | 58  | 40              |
| 360/80R24 (SB) | 13.6R24    | 143A8/138D | -  | TL   | 33                   | DW11          | 158      | 47        | 14        | 140       | 21         | 5200           | 46  | 40              |
| 400/80R24 (SB) | 14.9R24    | 149A8/144D | -  | TL   | 34                   | DW13          | 192      | 49        | 16        | 147       | 22         | 6170           | 46  | 40              |
| 440/80R24 (SB) | 16.9R24    | 154A8/149D | -  | TL   | 34                   | DW14L         | 222      | 52        | 17        | 155       | 23         | 7160           | 46  | 40              |
| 460/70R24 (SB) | 17.5LR24   | 159A8/154D | -  | TL   | 33                   | DW15L         | 230      | 49        | 18        | 148       | 23         | 8260           | 58  | 40              |
| 500/70R24 (SB) | 19.5LR24   | 164A8/159D | -  | TL   | 37                   | DW16L         | 259      | 52        | 20        | 154       | 23         | 9640           | 58  | 40              |
| 540/70R24 (SB) | -          | 168A8/162D | -  | TL   | 35                   | DW16L         | 294      | 54        | 21        | 161       | 24         | 10460          | 58  | 40              |
| 480/80R26 (SB) | 18.4R26    | 160A8/155D | -  | TL   | 37                   | DW15L         | 283      | 56        | 19        | 168       | 26         | 8540           | 46  | 40              |
| 580/70R26 (SB) | -          | 158A8/153D | -  | TL   | 38                   | DW18L         | 318      | 58        | 23        | 173       | 26         | 8040           | 35  | 40              |
| 400/80R28 (SB) | 16.9R28    | 151A8/146D | -  | TL   | 34                   | DW13          | 215      | 53        | 16        | 159       | 24         | 6610           | 46  | 40              |
| 440/80R28 (SB) | -          | 156A8/151D | -  | TL   | 34                   | DW14L         | 244      | 56        | 17        | 167       | 25         | 7600           | 46  | 40              |
| 480/65R28 (SB) | -          | 154A8/149D | -  | TL   | 35                   | DW15L         | 235      | 53        | 19        | 157       | 24         | 7160           | 46  | 40              |
| 540/65R28 (SB) | 16.9R30    | 160A8/155D | -  | TL   | 35                   | DW18L         | 281      | 56        | 21        | 166       | 25         | 8540           | 46  | 40              |
| 440/80R30 (SB) | 18.4R30    | 157A8/153D | -  | TL   | 35                   | DW14L         | 257      | 58        | 17        | 173       | 26         | 8040           | 46  | 40              |
| 480/80R30 (SB) | -          | 162A8/157D | -  | TL   | 37                   | DW15L         | 302      | 60        | 19        | 180       | 28         | 9090           | 46  | 40              |
| 540/65R30 (SB) | -          | 161A8/156D | -  | TL   | 38                   | W18L          | 307      | 58        | 22        | 172       | 26         | 8810           | 46  | 40              |
| 600/70R30 (SB) | 16.9R34    | 171A8/166D | -  | TL   | 38                   | DW20          | 411      | 63        | 24        | 189       | 29         | 11670          | 46  | 40              |
| 440/80R34 (SB) | 18.4R34    | 159A8/155D | -  | TL   | 35                   | DW14L         | 285      | 62        | 17        | 185       | 28         | 8540           | 46  | 40              |
| 480/80R34 (SB) | 18.4R38    | 164A8/159D | -  | TL   | 37                   | DW15L         | 332      | 64        | 19        | 192       | 30         | 9640           | 46  | 40              |
| 480/80R38 (SB) | 20.8R38    | 166A8/161D | -  | TL   | 37                   | DW15L         | 368      | 68        | 19        | 204       | 32         | 10190          | 46  | 40              |
| 540/80R38 (SB) | -          | 172A8/167D | -  | TL   | 38                   | DW16L         | 438      | 72        | 21        | 215       | 33         | 12000          | 46  | 40              |

Note: SB- Steel Belted SG- Stubble Gard

# MDR 1000 - [IND] [TL]



Tractor  
Telehandler



| Size                | ALT Size | LI/SI      | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------------------|----------|------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 600/65R38 (SB)      | -        | 170A8/166D | -  | TL   | 38                   | DW18L         | 432      | 69        | 23        | 206       | 32         | 11670          | 46  | 40              |
| 650/65R38 (SB)      | -        | 175A8/170D | -  | TL   | 40                   | DW20B         | 490      | 71        | 25        | 213       | 33         | 13220          | 46  | 40              |
| 650/65R38 (SB) (SG) | -        | 175A8/170D | -  | TL   | 40                   | DW20B         | 497      | 71        | 25        | 213       | 33         | 13220          | 46  | 40              |
| 650/85R38 (SG)      | -        | 183A8/178D | -  | TL   | 45                   | DW23B         | 719      | 82        | 27        | 244       | 37         | 16520          | 46  | 40              |
| 620/80R42 (SB)      |          | 181A8/177D |    | TL   | 44                   | DW20B         | 662      | 81        | 25        | 242       | 37         | 16080          | 46  | 40              |
| 650/65R42 (SB)      |          | 176A8/171D |    | TL   | 40                   | DW20B         | 524      | 75        | 25        | 225       | 35         | 13550          | 46  | 40              |
| 710/70R42 (SB)      |          | 185A8/180D |    | TL   | 47                   | DW23B         | 690      | 81        | 28        | 243       | 37         | 17620          | 46  | 40              |

Note: SB- Steel Belted, SG- Stubble Guard

# ● Harvester





## 23° Angle Lug Design:

- Stubble resistant design.
- Designed for high load-carrying applications.

## Wider Lugs:

- Provides optimum traction.



| Size     | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 23.1-26  | -        | 159A6 | 16 | TL   | 54                   | DW20B         | 386      | 63        | 23        | 189       | 28         | 9640           | 33  | 19              |
| 30.5L-32 | -        | 170A6 | 18 | TL   | 61                   | DH27B         | 629      | 73        | 31        | 217       | 33         | 13220          | 30  | 19              |

# HRR 200 - [R-1] [TL]



Harvester



Steel Belted



- Pattern optimized for quiet running.
- Optimized carcass for better operational stability, roadability and maneuvering.
- Specially designed for high load-carrying capacity.



| Size                 | ALT Size | LI/SI                      | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------------------|----------|----------------------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 500/85R24 (IMP) (SB) | -        | 171 A8 (FR)<br>158 A8 (DW) | -  | TL   | 48                   | W16L          | 304      | 58        | 20        | 172       | 26         | 13550          | 41  | 25              |
| 620/75R26 (SB)       | -        | 167A8                      | -  | TL   | 59                   | DW20B         | 396      | 63        | 25        | 187       | 28         | 12000          | 46  | 25              |
| 500/85R30 (IMP) (SB) | -        | 176 A8 (FR)<br>164 A8 (DW) | -  | TL   | 48                   | W16L          | 341      | 63        | 20        | 190       | 29         | 15640          | 41  | 25              |
| 620/75R30 CHO (SB)   |          | 169 A8 / B                 |    | TL   | 59                   | DW20B         | 453      | 67        | 25        | 199       | 30         | 12780          | 46  | 25 / 31         |
| 650/75R32 (SB)       |          | 172 A8                     |    | TL   | 63                   | DW21B         | 510      | 70        | 26        | 211       | 32         | 13880          | 46  | 25              |
| 680/85R32 (SB)       |          | 179 A8                     |    | TL   | 63                   | DW21B         | 714      | 78        | 27        | 232       | 35         | 17070          | 46  | 25              |
| 800/65R32 (SB)       |          | 181 A8                     |    | TL   | 67                   | DW27B         | 710      | 73        | 32        | 218       | 33         | 18170          | 52  | 25              |
| 800/70R32 (SB)       |          | 175 A8                     |    | TL   | 69                   | DW27B         | 738      | 76        | 32        | 228       | 34         | 15200          | 35  | 25              |
| 900/60R32 (SB)       |          | 191 D                      |    | TL   | 69                   | DW28B         | 837      | 75        | 35        | 223       | 34         | 24010          | 64  | 40              |
| 710/75R34 CHO (SB)   |          | 184 A8 / B                 |    | TL   | 67                   | DW23B         | 708      | 76        | 28        | 227       | 34         | 19820          | 64  | 25 / 31         |

Note: SB- Steel Belted, CHO- Cyclic Harvesting Operation, IMP- Implement, FR- Free Rolling, DW- Drive Wheel



## Dual angle lug design with larger contact surface area:

- Optimized dual angle lug shape improves traction and stability
- Strong shoulders with higher draft angle and base radius of lug can withstand heavy loads at low inflation pressure

## Advance VF technology:

- Designed to bear heavy loads, 40% more than standard radial tyre. Due to greater flexion capacity of carcass, the pressure distributes to the ground uniformly
- Excellent for frequent loading and unloading in cyclic field operation (CFO), ensuring better durability and reliability than standard tyres.

## Mud Ejector:

- Excellent Self-Cleaning properties.

## SR compound (Special Stubble Resistant):

- Longer Tire Life and defense against stubble which provides better protection on field.

## High flex carcass with durable Steel belts:

- Maximize the load capacity of the tire at low inflation pressure, preserving the soil.
- SB offers excellent puncture resistance and optimized load distribution.



| Size                       | Preferred Rim | LI/SI          | Type | Tread Depth (32 nds) | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------------------------|---------------|----------------|------|----------------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| VF 1000/50R25 CFO (SB SG)* | 36.0TH        | 184 D / 184 A8 | TL   | 58.0                 | 786.4    | 64.3      | 39.6      | 192.5     | 28.7       | 19820          | 35  | 40              |
| VF 750/50R26 CFO (SB SG)*  | DW25B         | 169 D / 169 A8 | TL   | 50.4                 | 424.1    | 55.5      | 28.9      | 166       | 25.1       | 12780          | 35  | 40              |
| VF 750/65R26 CFO (SB SG)   | DW27B         | 180 A8         | TL   | 70.6                 | 663.5    | 64.4      | 29.6      | 192.6     | 28.8       | 17620          | 41  | 25              |
| VF 800/65R32 CFO (SB SG)   | DW28B         | 183 A8         | TL   | 73.1                 | 795.4    | 72.9      | 31.3      | 218.2     | 32.8       | 19270          | 35  | 25              |
| VF 1050/50R32 CFO (SB SG)* | 36.00VA(SDC)  | 198 D / 198 A8 | TL   | 58.0                 | 958.8    | 73.3      | 40.8      | 219.3     | 33.1       | 29070          | 52  | 40              |
| VF 580/80R34 CFO (SB SG)   | DW20B         | 178 A8         | TL   | 73.1                 | 631.4    | 70.6      | 23.1      | 211       | 32.0       | 16520          | 41  | 25              |
| VF 800/55R46 CFO (SB SG)   | DW28B         | 190 D / 190 A8 | TL   | 76.9                 | 947.9    | 81.3      | 31.2      | 243.3     | 37.5       | 23350          | 44  | 40              |

Note: SB- Steel Belted, SG-Stubble Guard, CFO-Cyclical Field Operation, VF-Very High Flexion, Sizes marked in \* have TRA code as R-1

# ● Implement







## Optimum Implement Design:

- Minimizes soil compaction and protects the grassland.

## Strong Nylon Carcass:

- Provides high load-carrying capacity.



| Size         | ALT Size    | LI/SI      | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|--------------|-------------|------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 7.50-10      | -           | 111/99A8   | 12 | TT   | 11                   | 5.5           | 22       | 25        | 8         | 75        | 11         | 2405           | 73  | 25              |
| 10.0/80-12   | -           | 116/104A8  | 8  | TL   | 13                   | 9             | 34       | 28        | 10        | 84        | 13         | 2490           | 45  | 31              |
| 10.0/80-12   | -           | 121/109A8  | 10 | TL   | 13                   | 9             | 34       | 28        | 10        | 84        | 13         | 3190           | 57  | 25              |
| 10.0/75-15.3 | 260/75-15.3 | 123/111A8  | 10 | TL   | 11                   | 9             | 32       | 30        | 10        | 90        | 14         | 3410           | 57  | 25              |
| 10.0/75-15.3 | 260/75-15.3 | 126/114A8  | 12 | TL   | 11                   | 9             | 35       | 30        | 10        | 90        | 14         | 3370           | 68  | 31              |
| 10.0/75-15.3 | 260/75-15.3 | 130/118A8  | 14 | TL   | 11                   | 9             | 35       | 30        | 10        | 90        | 14         | 4180           | 80  | 25              |
| 10.0/75-15.3 | 260/75-15.3 | 135/122A8  | 18 | TL   | 11                   | 9             | 44       | 30        | 10        | 90        | 14         | 4800           | 103 | 25              |
| 11.5/80-15.3 | -           | 131/119A8  | 10 | TL   | 11                   | 9             | 41       | 33        | 11        | 100       | 15         | 3870           | 49  | 25              |
| 11.5/80-15.3 | -           | 135/123A8  | 12 | TL   | 11                   | 9             | 42       | 33        | 11        | 100       | 15         | 4310           | 59  | 31              |
| 11.5/80-15.3 | -           | 139/126A8  | 14 | TL   | 11                   | 9             | 42       | 33        | 11        | 100       | 15         | 4820           | 69  | 25              |
| 11.5/80-15.3 | -           | 142/129A8  | 16 | TL   | 11                   | 9             | 42       | 33        | 11        | 100       | 15         | 5260           | 80  | 25              |
| 11.5/80-15.3 | -           | 144/132A8  | 18 | TL   | 11                   | 9             | 50       | 33        | 11        | 100       | 15         | 5540           | 91  | 25              |
| 12.5/80-15.3 | 300/80-15.3 | 142/129A8  | 14 | TL   | 11                   | 9             | 53       | 34        | 12        | 102       | 15         | 5830           | 62  | 25              |
| 12.5/80-15.3 | 300/80-15.3 | 151/139A8  | 18 | TL   | 11                   | 9             | 62       | 34        | 12        | 102       | 15         | 7590           | 98  | 25              |
| 400/60-15.5  | -           | 146/133A8  | 16 | TL   | 13                   | 13            | 65       | 34        | 16        | 103       | 16         | 6615           | 58  | 25              |
| 10.5/65-16   | 360/65-16   | 130/118A8  | 14 | TL   | 10                   | W9            | 37       | 30        | 11        | 89        | 14         | 4180           | 77  | 25              |
| 13.0/75-16   | -           | 138A8      | 12 | TL   | 15                   | 11            | 63       | 35        | 13        | 106       | 16         | 5190           | 52  | 25              |
| 14.0/65-16   | -           | 142/129 A8 | 14 | TL   | 15                   | 11            | 63       | 34        | 14        | 103       | 16         | 5840           | 58  | 25              |
| 15.0/55-17   | -           | 134/122A8  | 10 | TL   | 15                   | 13            | 53       | 34        | 15        | 100       | 15         | 4680           | 39  | 25              |
| 15.0/55-17   | -           | 141/128A8  | 14 | TL   | 15                   | 13            | 59       | 34        | 15        | 100       | 15         | 5670           | 54  | 25              |
| 19.0/45-17   | -           | 144/131A8  | 14 | TL   | 17                   | 16            | 86       | 34        | 19        | 102       | 16         | 6175           | 44  | 25              |
| 500/50-17    | -           | 149/136A8  | 14 | TL   | 16                   | 16            | 94       | 37        | 20        | 110       | 17         | 7165           | 41  | 25              |
| 500/50-17    | -           | 154/142A8  | 18 | TL   | 16                   | 16            | 99       | 37        | 20        | 110       | 17         | 7440           | 52  | 31              |
| 10.5/80-18   | -           | 138A8      | 14 | TL   | 14                   | W9            | 54       | 35        | 11        | 104       | 16         | 5190           | 75  | 25              |
| 12.5/80-18   | -           | 148/135A8  | 16 | TL   | 15                   | 9             | 75       | 38        | 12        | 114       | 17         | 6930           | 71  | 25              |
| 13.0/65-18   | -           | 144/131A8  | 16 | TL   | 15                   | 11            | 68       | 35        | 13        | 105       | 16         | 6160           | 71  | 25              |
| 15.0/70-18   | -           | 151/139A8  | 16 | TL   | 15                   | 13            | 93       | 39        | 15        | 117       | 18         | 7590           | 62  | 25              |



## Wider Footprint:

- Minimizes soil compaction and protects the grassland.

## Optimum Height to Width Ratio:

- Ensures stability.

## Strong Nylon Carcass:

- Provides high load-carrying capacity.



| Size        | ALT Size   | LI/SI      | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-------------|------------|------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 260/70-15.3 | -          | 122/110A8  | 10 | TL   | 14                   | 9             | 37       | 30        | 11        | 89        | 14         | 3300           | 46  | 25              |
| 260/70-15.3 | -          | 131/119A8  | 14 | TL   | 14                   | 9             | 40       | 30        | 11        | 89        | 14         | 4290           | 73  | 25              |
| 300/80-15.3 | -          | 139A8      | 14 | TL   | 13                   | 9             | 51       | 34        | 12        | 102       | 15         | 5345           | 54  | 25              |
| 400/60-15.5 | -          | 148/135A8  | 16 | TL   | 15                   | 13            | 74       | 34        | 16        | 103       | 16         | 6930           | 61  | 25              |
| 400/60-15.5 | -          | 145/132A8  | 14 | TL   | 15                   | 13            | 73       | 34        | 16        | 103       | 16         | 6380           | 52  | 25              |
| 400/60-15.5 | -          | 149/136 A8 | 18 | TL   | 15                   | 13            | 77       | 34        | 16        | 103       | 16         | 7150           | 65  | 25              |
| 340/55-16   | 13.0/55-16 | 133/121A8  | 12 | TL   | 15                   | 11            | 49       | 31        | 14        | 92        | 14         | 4530           | 46  | 25              |
| 340/55-16   | 13.0/55-16 | 136 /124A8 | 14 | TL   | 15                   | 11            | 48       | 31        | 14        | 92        | 12         | 4930           | 52  | 25              |
| 340/55-16   | 13.0/55-16 | 140/128A8  | 18 | TL   | 15                   | 11            | 53       | 31        | 14        | 92        | 14         | 5500           | 70  | 25              |
| 380/55-17   | 15.0/55-17 | 134/122A8  | 10 | TL   | 15                   | 13            | 60       | 33        | 15        | 100       | 15         | 4665           | 38  | 25              |
| 380/55-17   | 15.0/55-17 | 141/128A8  | 14 | TL   | 15                   | 13            | 57       | 33        | 15        | 100       | 15         | 5665           | 46  | 25              |
| 380/55-17   | 15.0/55-17 | 146/134A8  | 18 | TL   | 15                   | 13            | 73       | 33        | 15        | 100       | 15         | 6600           | 67  | 25              |
| 480/45-17   | 19.0/45-17 | 146/134A8  | 14 | TL   | 17                   | 16            | 88       | 34        | 19        | 102       | 16         | 6600           | 46  | 25              |
| 480/45-17   | 19.0/45-17 | 149/136A8  | 18 | TL   | 17                   | 16            | 96       | 34        | 19        | 102       | 16         | 7150           | 51  | 25              |
| 500/50-17   | -          | 143/131A8  | 10 | TL   | 17                   | 16            | 111      | 37        | 20        | 110       | 17         | 5995           | 29  | 25              |
| 500/50-17   | -          | 149/137A8  | 14 | TL   | 17                   | 16            | 121      | 37        | 20        | 110       | 17         | 7150           | 41  | 25              |
| 500/50-17   | -          | 154/142A8  | 18 | TL   | 17                   | 16            | 116      | 37        | 20        | 110       | 17         | 8250           | 58  | 25              |
| 400/70-20   | 16.0/70-20 | 156/144A8  | 16 | TL   | 15                   | 13            | 107      | 42        | 20        | 126       | 19         | 8800           | 58  | 25              |
| 500/55-20   | -          | 150/138A8  | 10 | TL   | 17                   | 16            | 116      | 42        | 20        | 125       | 19         | 7370           | 35  | 25              |
| 500/55-20   | -          | 155/143A8  | 12 | TL   | 17                   | 16            | 129      | 42        | 20        | 125       | 19         | 8525           | 46  | 25              |



## Specially-designed Directional Tread Pattern:

- Ensures excellent traction and self-cleaning properties.

## Superior Carcass Construction:

- High load-carrying capacity and directional stability.

## Special Tread Compound:

- Ensures longer tire life.



| Size             | ALT Size    | LI/SI     | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|------------------|-------------|-----------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 6.5/80-12        | -           | 93/80A8   | 6  | TT   | 18                   | 5J            | 16       | 23        | 6         | 69        | 11         | 1430           | 52  | 25              |
| 7.00-12          | -           | 95/83A8   | 6  | TL   | 24                   | 4.5           | 27       | 27        | 7         | 80        | 12         | 1520           | 36  | 25              |
| 6.5/80-13        | -           | 95/82 A8  | 6  | TT   | 18                   | 9             | 17       | 25        | 6         | 74        | 11         | 1518           | 54  | 25              |
| 5.00-15          | -           | 88/75A8   | 6  | TL   | 20                   | 3.50D         | 18       | 26        | 5         | 77        | 12         | 1230           | 51  | 25              |
| 6.5/80-15        | -           | 98/86A8   | 6  | TL   | 20                   | 5.0F          | 24       | 26        | 6         | 78        | 12         | 1650           | 52  | 25              |
| 7.5L-15          | 260/75-15.3 | 113/100A8 | 8  | TL   | 32                   | 6LB           | 36       | 30        | 8         | 90        | 14         | 2530           | 54  | 25              |
| 10.0/75-15.3     | 260/75-15.3 | 123/111A8 | 10 | TL   | 29                   | 9             | 46       | 31        | 10        | 92        | 14         | 3410           | 57  | 25              |
| 10.0/75-15.3 HLV | 260/75-15.3 | 129/123A8 | 10 | TL   | 29                   | 9             | 49       | 31        | 10        | 92        | 14         | 4070           | 68  | 25              |
| 10.0/75-15.3     | 260/75-15.3 | 130/118A8 | 14 | TL   | 29                   | 9             | 48       | 31        | 10        | 92        | 14         | 4180           | 80  | 25              |
| 10.0/75-15.3     | -           | 135/123A8 | 18 | TL   | 29                   | 9             | 55       | 31        | 10        | 92        | 14         | 4795           | 103 | 25              |
| 11.5/80-15.3     | -           | 135/123A8 | 12 | TL   | 29                   | 9             | 60       | 34        | 11        | 102       | 15         | 4795           | 59  | 25              |
| 11.5/80-15.3     | -           | 139/126A8 | 14 | TL   | 29                   | 9             | 60       | 34        | 11        | 102       | 15         | 5345           | 69  | 25              |
| 11.5/80-15.3 HLV | -           | 145/139A8 | 14 | TL   | 29                   | 9             | 68       | 34        | 11        | 102       | 15         | 6380           | 84  | 25              |
| 6.00-16          | -           | 103/91A8  | 8  | TL   | 23                   | 4.00E         | 25       | 29        | 6         | 86        | 13         | 1925           | 58  | 25              |
| 6.50-16          | -           | 105/93A8  | 8  | TT   | 23                   | 4.5           | 24       | 30        | 7         | 90        | 14         | 2040           | 54  | 25              |
| 7.50-16          | -           | 112/99A8  | 8  | TL   | 27                   | 5.50F         | 33       | 32        | 8         | 95        | 14         | 2460           | 46  | 25              |
| 19.0/45-17       | -           | 138/125A8 | 10 | TL   | 32                   | 16            | 84       | 35        | 19        | 104       | 16         | 5190           | 33  | 25              |
| 19.0/45-17       | -           | 146/133A8 | 16 | TL   | 30                   | 16            | 99       | 35        | 19        | 104       | 16         | 6600           | 46  | 25              |
| 7.50-18          | -           | 114/101A8 | 8  | TT   | 27                   | 5.50F         | 33       | 34        | 8         | 101       | 15         | 2600           | 45  | 25              |
| 10.5/80-18       | -           | 131/119A8 | 10 | TL   | 28                   | W9            | 68       | 35        | 11        | 106       | 16         | 4290           | 54  | 25              |
| 12.5/80-18       | -           | 142/129A8 | 12 | TL   | 35                   | W9            | 91       | 39        | 12        | 115       | 18         | 5830           | 54  | 25              |
| 7.50-20          | -           | 116/103A8 | 8  | TT   | 27                   | 5.50F         | 40       | 36        | 8         | 107       | 16         | 2750           | 47  | 25              |

HLV- High Load Variant



## Specially Designed Ribbed Tire:

- Low rolling resistance.

## Wider Centre Rib:

- Provides excellent Maneuverability and long tire life.

## Constant Tension Construction

- Minimizes Crowning of the Tire.



| Size          | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 9.5L-14 SL    | -        | 111B  | 8  | TL   | 10                   | 7             | 30       | 29        | 10        | 88        | 13         | 2400           | 44  | 31              |
| 11L-14 SL     | -        | 112 B | 8  | TL   | 10                   | 8             | 48       | 30        | 11        | 88        | 13         | 2470           | 36  | 31              |
| 6.70-15 SL    | -        | 97B   | 6  | TL   | 8                    | 4             | 20       | 28        | 7         | 83        | 13         | 1610           | 44  | 31              |
| 7.60-15 SL    | -        | 110B  | 10 | TL   | 8                    | 6             | 28       | 29        | 8         | 87        | 13         | 2320           | 62  | 31              |
| 9.5L-15 SL    | -        | 112B  | 8  | TL   | 10                   | 7             | 31       | 30        | 9         | 90        | 14         | 2470           | 44  | 31              |
| 9.5L-15 SL    | -        | 121B  | 12 | TL   | 10                   | 7             | 38       | 30        | 9         | 90        | 14         | 3200           | 64  | 31              |
| 10.00-15 SL   | -        | 121 B | 8  | TL   | 12                   | 8             | 47       | 34        | 11        | 100       | 15         | 3200           | 40  | 31              |
| 11L-15 SL     | -        | 113B  | 8  | TL   | 10                   | 8             | 33       | 31        | 11        | 91        | 14         | 2540           | 36  | 31              |
| 11L-15 SL     | -        | 121B  | 12 | TL   | 10                   | 8             | 40       | 31        | 11        | 91        | 14         | 3200           | 52  | 31              |
| 11L-15 SL     | -        | 128 B | 16 | TL   | 10                   | 8             | 48       | 31        | 11        | 91        | 14         | 3960           | 73  | 31              |
| 12.5L-15 SL   | -        | 127B  | 12 | TL   | 11                   | 10            | 48       | 32        | 13        | 97        | 15         | 3860           | 52  | 31              |
| 31x13.50-15   | -        | 124 B | 12 | TL   | 12                   | 10            | 64       | 31        | 14        | 92        | 14         | 3530           | 75  | 31              |
| 12.5L-16 SL   | -        | 130B  | 14 | TL   | 11                   | 10            | 52       | 33        | 13        | 100       | 15         | 4180           | 56  | 31              |
| 14L-16.1 SL   | -        | 138 B | 14 | TL   | 13                   | W11C          | 79       | 37        | 14        | 111       | 17         | 5203           | 52  | 31              |
| 16.5L-16.1 SL | -        | 141B  | 12 | TL   | 14                   | 14            | 98       | 40        | 17        | 121       | 18         | 5675           | 40  | 31              |
| 21.5L-16.1 SL | -        | 152B  | 14 | TL   | 15                   | 18            | 141      | 45        | 22        | 133       | 20         | 7820           | 36  | 31              |
| 7.50-20 SL    | -        | 106 B | 6  | TL   | 9                    | 5.5           | 34       | 35        | 8         | 104       | 16         | 2090           | 36  | 31              |
| 11.25-24 SL   | -        | 138B  | 12 | TL   | 13                   | W10           | 96       | 46        | 13        | 138       | 21         | 5203           | 48  | 31              |
| 11.25-28 SL   | -        | 139B  | 12 | TL   | 13                   | W10           | 113      | 50        | 13        | 150       | 23         | 5357           | 48  | 31              |





## Specially Designed Rib Pattern:

- Ensures soil protection.
- Suitable for both on-road and off-road applications.
- Built for carrying high loads.



| Size        | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 200/60-14.5 | -        | 106A8 | 10 | TT   | 13                   | AG 6.75       | 27       | 24        | 8         | 72        | 11         | 2090           | 73  | 25              |
| 200/60-14.5 | -        | 113A8 | 14 | TT   | 13                   | AG 6.75       | 29       | 24        | 8         | 72        | 11         | 2530           | 102 | 25              |
| 200/60-14.5 | -        | 113A8 | 14 | TL   | 13                   | AG 6.75       | 32       | 24        | 8         | 72        | 11         | 2530           | 102 | 25              |
| 250/65-14.5 | -        | 119A8 | 12 | TL   | 13                   | AG 8.00       | 42       | 27        | 10        | 82        | 13         | 2992           | 68  | 25              |



## Optimal Tread Design:

- Excellent traction & self-cleaning.
- High contact area for better stability and driving comfort.

## Superior Carcass:

- Ensures better load-carrying capacity.



| Size        | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim            | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-------------|----------|-------|----|------|----------------------|--------------------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 23X8.50-12  | -        | 89 A6 | 6  | TL   | 16                   | 7JA,7.00-I-55; I-70;I-90 | 16       | 23        | 8         | 68        | 10         | 1280           | 33  | 19              |
| 26X12.00-12 | -        | 112A6 | 8  | TL   | 24                   | 10½ JA                   | 34       | 26        | 12        | 77        | 12         | 2470           | 44  | 19              |
| 26x12.00-12 | -        | 117A6 | 10 | TL   | 24                   | 10½ JA                   | 35       | 26        | 12        | 77        | 12         | 2833           | 55  | 19              |
| 29x12.50-15 | -        | 98B   | 6  | TL   | 24                   | 10LB                     | 44       | 30        | 12        | 89        | 14         | 1650           | 30  | 31              |
| 31X15.50-15 | -        | 121B  | 10 | TL   | 25                   | 13LB                     | 62       | 32        | 15        | 94        | 14         | 3200           | 59  | 31              |



## Directional Tread Pattern:

- Designed for trailers and agricultural implements both on- and off the road.

## Robust Lugs with wider footprint:

- Excellent traction and self-cleaning properties.
- Low Soil Compaction & improved yields.

## Superior Carcass Construction:

- Designed for trailers and agricultural implements both on- and off the road.

## Robust Lugs with wider footprint:

- High load-carrying capacity and directional stability.



| Size        | ALT Size | LI/SI      | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-------------|----------|------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 280/60-15.5 | -        | 128/116 A8 | 6  | TL   | 25.2                 | AG 8.00       | 48.8     | 29.3      | 10.7      | 87.7      | 13.5       | 3960           | 58  | 25              |
| 320/60-12   | -        | 132/120 A8 | 8  | TL   | 25.2                 | 10.50 I       | 45.5     | 27.2      | 12.8      | 81.3      | 12.2       | 4400           | 58  | 25              |



## Specially Designed Rib Tire:

- Five-rib design for increased stability in field and roads.

## Deeper Tread Groove:

- Provides easy steering machinery equipment.

## D.O.T. approved for highway speeds:

- For intermittent highway use on farm implements and wagons in agricultural service.
- Ideally for use in towed implement applications.

## Superior Carcass Construction:

- High load-carrying capacity.



| Size        | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 9.5L-15 FI  | -        | 123J  | -  | TL   | 11                   | 7             | 49       | 30        | 9         | 90        | 14         | 3420           | 90  | 62              |
| 11L-15 FI   | -        | 128J  | -  | TL   | 13                   | 8LB           | 53       | 31        | 11        | 92        | 14         | 3960           | 90  | 62              |
| 12.5L-15 FI | -        | 134J  | -  | TL   | 13                   | 10LB          | 69       | 32        | 13        | 97        | 15         | 4680           | 90  | 62              |



## Specially-designed Semi Lug Pattern:

- Improves tread wear during trailer application.

## Strong Nylon Carcass:

- High load-carrying capacity.

## Special Tread Compound:

- Longer tyre life and puncture resistance.



| Size    | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 9.00-16 | -        | 137A6 | 16 | TT   | 28                   | 6.50H         | 72       | 36        | 10        | 107       | 16         | 5070           | 105 | 19              |
| 9.00-16 | -        | 138A6 | 18 | TT   | 28                   | 6.50H         | 75       | 36        | 10        | 107       | 16         | 5200           | 110 | 19              |





## Specially designed Lug Pattern:

- Suitable for transport applications both on and off the road.

## Tread pattern with high contact patch:

- Provides uniform wear and outstanding stability.

## Robust Construction:

- Higher load-carrying.

## Special Tread compound:

- Longer Tire Life & Puncture resistance.



| Size     | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Load (lbs) | Psi | Max Speed (mph) |
|----------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|----------------|-----|-----------------|
|          |          |       |    |      |                      |               |          |           |           |           |            | Single Load    |     | Dual Load      |     |                 |
| 10.00-20 | -        | -     | 18 | TT   | 31                   | 7.50          | 128      | 43        | 11        | 127       | 19         | 8470           | 135 | 7500           | 125 | 19              |



## Unique Rib Pattern:

- Excellent Road Grip & ease in steering
- Suitable for transport applications both on and off the road

## Tread pattern with high contact patch:

- Provides uniform wear and outstanding stability

## Special Shoulder Design:

- More air Circulation in operation

## Transverse Tread Design:

- Reduce stone trapping & better safety

## Special Tread Compound:

- Longer Tire Life & Puncture resistance



| Size     | ALT<br>Size | LI/SI | PR | Type | Tread<br>Depth<br>(32 nds) | Preferred<br>Rim | Wt<br>(lbs) | OD<br>inches | SW<br>inches | RC<br>inches | SLR<br>inches | Max Load<br>(lbs) | Psi | Max Load<br>(lbs) | Psi | Max<br>Speed<br>(mph) |
|----------|-------------|-------|----|------|----------------------------|------------------|-------------|--------------|--------------|--------------|---------------|-------------------|-----|-------------------|-----|-----------------------|
|          |             |       |    |      |                            |                  |             |              |              |              |               | Single Load       |     | Dual Load         |     |                       |
| 10.00-20 | -           | -     | 18 | TT   | 25                         | 7.5              | 120         | 42           | 11           | 126          | 19            | 8475              | 135 | 7505              | 125 | 20                    |



- Optimized tread design with improved lateral traction for better operational stability on inclined surfaces and self-cleaning.
- Longer cleat length gives low soil compaction, better traction, and higher stability.
- Better suitability for grassland, garden & tillage operations.



| Size           | ALT Size   | LI/SI           | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------------|------------|-----------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 31X15.50 R15   | -          | 122B            | -  | TL   | 24                   | 13LB          | 68       | 31        | 15        | 93        | 14         | 3300           | 41  | 31              |
| 33X15.50 R15   | -          | 126B            | -  | TL   | 24                   | 13LB          | 76       | 33        | 15        | 99        | 15         | 3740           | 46  | 31              |
| 425/55R17      | -          | 134D            | -  | TL   | 34                   | 13            | 105      | 35        | 17        | 104       | 16         | 4670           | 51  | 40              |
| 380/55R17      | 15.0/55R17 | 138 A8 / 125 A8 | -  | TL   | 28                   | 13            | 86       | 33        | 15        | 100       | 15         | 5200/3640      | 41  | 40              |
| 500/50R17 (SB) | -          | 145D            |    | TL   | 31                   | 16            | 130      | 37        | 20        | 110       | 17         | 6390           | 58  | 40              |

Note: SB- Steel Belted



## Advance VF technology:

- Built to handle 40% more load than a conventional radial tire, or the same load at 40% lower pressure.

## Block tread design with Wider footprint:

- Excellent Traction.
- Low Soil Compaction & improved yields.
- Protection for soil & plants.

## SSR compound (Special Stubble Resistant):

- Longer Tire Life and defense against stubble which provides better protection on field.

## Continuous Center Rib:

- Centre rib improve steering capability and enhance lateral traction.

## Extra Strong Casing with High Performance Steel belts:

- Provides exceptional puncture resistance, with even footprint to disperse load equally.
- SB offers better impact resistance and defend against stubble to enhance tire more durable.



| Size                    | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-------------------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| VF 265/85R15 (SB, SG)   | -        | 129 D | -  | TL   | 13                   | 8LB           | 71       | 33        | 10        | 98        | 15         | 4070           | 44  | 40              |
| VF 340/60R15 (SB, SG)   | -        | 129 D | -  | TL   | 14                   | 10LB          | 75       | 31        | 13        | 93        | 14         | 4070           | 41  | 40              |
| VF 280/70R15 (SB, SG)   | -        | 140 D | -  | TL   | 12                   | 8LB           | 65       | 30        | 11        | 91        | 14         | 5511           | 81  | 40              |
| VF 320/70R15 (SB, SG)   | -        | 145 D | -  | TL   | 13.9                 | 10LB          | 79       | 33        | 13        | 98        | 15         | 6393           | 72  | 40              |
| VF 380/70R15 (SB SG)    | -        | 152 D | -  | TL   | 15.7                 | 12            | 109      | 36        | 15        | 108       | 14         | 7820           | 67  | 40              |
| VF 380/55R16.5 (SB, SG) |          | 148D  |    | TL   | 15.7                 | 12            | 93       | 33        | 15        | 99        | 15         | 6945           | 72  | 40              |
| VF 380/60R16.5 (SB, SG) |          | 147D  |    | TL   | 15.7                 | 12            | 99       | 34        | 15        | 104       | 16         | 6779           | 58  | 40              |
| VF 480/45R17 (SB, SG)   |          | 155 D |    | TL   | 20                   | 16            | 127      | 34        | 19        | 102       | 16         | 8540           | 73  | 40              |
| VF 500/50R17 (SB, SG)   |          | 156 D |    | TL   | 20                   | 16            | 144      | 37        | 20        | 110       | 17         | 8810           | 55  | 40              |

Note: VF- Very High Flexion SB- Steel Belted, SG- Stubble Guard



- Uniquely designed to protect fields/grasslands and provide rapid self-cleaning.
- Excellent forward and reverse traction on inclined surfaces.
- Enhanced vehicle stability and Maneuverability on account of improved sidewall stiffness.



| Size           | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 31X15.50 R15   | -        | 122B  | -  | TL   | 20                   | 13LB          | 65       | 31        | 15        | 93        | 14         | 3300           | 41  | 31              |
| 33X15.50 R15   | -        | 126B  | -  | TL   | 20                   | 13LB          | 71       | 33        | 15        | 99        | 15         | 3740           | 46  | 31              |
| 440/50R17 (SB) | -        | 135D  | -  | TL   | 23                   | 13            | 100      | 34        | 17        | 103       | 16         | 4760           | 52  | 40              |
| 480/45R17 (SB) | -        | 137D  | -  | TL   | 23                   | 16            | 104      | 34        | 19        | 101       | 15         | 5070           | 58  | 40              |
| 500/50R17 (SB) | -        | 147D  | -  | TL   | 23                   | 16            | 121      | 37        | 20        | 110       | 17         | 6770           | 64  | 40              |

Note: SB- Steel Belted



# ● Flotation







## Optimized Flotation Design:

- Reduces soil compaction.
- Generates traction.
- Self-cleaning properties.

## Enhanced Carcass Construction:

- Ensures high load-carrying capacity.



| Size           | ALT Size | LI/SI       | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------------|----------|-------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 300/65-12      | -        | 122 A8 F.R. | 8  | TL   | 14                   | 9             | 35.1     | 27        | 12        | 80        | 12         | 3300           | 44  | 25              |
| 400/60-15.5    | -        | 145A8 F.R.  | 14 | TL   | 23                   | AG13.00       | 75       | 34        | 16        | 103       | 16         | 6380           | 52  | 25              |
| 400/60-15.5    | -        | 148A8 F.R.  | 16 | TL   | 23                   | AG13.00       | 78       | 34        | 16        | 103       | 16         | 6930           | 61  | 25              |
| 400/60-15.5    | -        | 151A8 F.R.  | 18 | TL   | 23                   | AG13.00       | 82       | 35        | 16        | 103       | 16         | 7590           | 73  | 25              |
| 480/45-17      | -        | 150 A8 F.R. | 16 | TL   | 24                   | 16            | 96       | 34        | 19        | 102       | 16         | 7370           | 52  | 25              |
| 500/50-17      | -        | 149A8 F.R.  | 14 | TL   | 16                   | 16            | 121      | 37        | 20        | 110       | 17         | 7150           | 41  | 25              |
| 500/50-17      | -        | 157A8 F.R.  | 18 | TL   | 16                   | 16            | 129      | 37        | 20        | 110       | 17         | 9075           | 58  | 25              |
| 400/55-22.5    | -        | 150A8 F.R.  | 14 | TL   | 24                   | 13            | 108      | 40        | 16        | 120       | 19         | 7370           | 44  | 25              |
| 400/55-22.5    | -        | 152A8 F.R.  | 16 | TL   | 24                   | 13            | 109      | 40        | 16        | 120       | 19         | 7810           | 58  | 25              |
| 550/45-22.5    | -        | 159A8 F.R.  | 16 | TL   | 32                   | 16            | 160      | 42        | 22        | 126       | 19         | 9625           | 41  | 25              |
| 550/45-22.5    | -        | 159A8 F.R.  | 20 | TL   | 32                   | 16            | 177      | 42        | 22        | 126       | 19         | 11660          | 51  | 25              |
| 500/45-22.5    | -        | 154A8 F.R.  | 16 | TL   | 32                   | 16            | 155      | 40        | 20        | 120       | 19         | 8250           | 52  | 25              |
| 500/50-22.5    | -        | 163A8 F.R.  | 20 | TL   | 28                   | AG16.00       | 160      | 42        | 20        | 127       | 19         | 10730          | 55  | 25              |
| 500/60-22.5    | -        | 163A8 F.R.  | 16 | TL   | 33                   | 16            | 196      | 46        | 20        | 138       | 21         | 10725          | 46  | 25              |
| 500/60-22.5    | -        | 170A8 F.R.  | 20 | TL   | 33                   | 16            | 184      | 46        | 20        | 138       | 21         | 13200          | 73  | 25              |
| 550/60-22.5 V  | -        | 166A8 F.R.  | 16 | TL   | 33                   | 16            | 196      | 49        | 22        | 146       | 22         | 11660          | 44  | 25              |
| 550/60-22.5    | -        | 166A8 F.R.  | 16 | TL   | 33                   | 16            | 196      | 49        | 22        | 146       | 22         | 11660          | 44  | 25              |
| 550/60-22.5    | -        | 171A8 F.R.  | 20 | TL   | 33                   | 16            | 231      | 49        | 22        | 146       | 22         | 13530          | 51  | 25              |
| 560/60-22.5 HD | -        | 167A8 F.R.  | 16 | TL   | 33                   | 16            | 210      | 49        | 22        | 147       | 22         | 26380          | 41  | 25              |
| 600/50-22.5    | -        | 165A8 F.R.  | 16 | TL   | 32                   | 20            | 245      | 46        | 24        | 138       | 21         | 11330          | 41  | 25              |
| 600/50-22.5 HD |          | 171 A8 F.R. | 20 | TL   | 31                   | 20            | 226      | 46        | 24        | 138       | 21         | 13530          | 55  | 25              |
| 600/55-22.5    | -        | 169A8 F.R.  | 16 | TL   | 33                   | 20            | 231      | 49        | 24        | 145       | 22         | 12760          | 38  | 25              |
| 700/40-22.5    | -        | 166A8 F.R.  | 16 | TL   | 33                   | 24            | 240      | 45        | 29        | 134       | 21         | 11660          | 38  | 25              |
| 700/50-22.5    | -        | 174A8 F.R.  | 16 | TL   | 33                   | 20            | 273      | 50        | 29        | 150       | 23         | 14740          | 41  | 25              |
| 600/55-26.5    |          | 170A8 F.R.  | 16 | TL   | 33                   | 20            | 259      | 52        | 25        | 147       | 24         | 13200          | 38  | 25              |
| 700/50-26.5    |          | 174A8 F.R.  | 16 | TL   | 33                   | 20            | 297      | 52        | 29        | 157       | 24         | 14740          | 35  | 25              |
| 800/45-26.5    |          | 177A8 F.R.  | 16 | TL   | 33                   | 24            | 338      | 55        | 33        | 164       | 25         | 16060          | 32  | 25              |

Note: V- Value Plus, HD: Heavy Duty, FR: Free Rolling



## Block design for all surfaces:

- Specially design to suits for construction transportation of Agri trailer.

## Wider Footprint:

- Provides stability and control, good lateral balance and high flotation on soft surfaces.

## Cut Resistant Compound:

- Enhanced durability in rugged terrain.
- Exceptional Resistance to cut & abrasion in operation.

## High Rubber to Void ratio:

- Superior Grip & Traction along with smooth and comfortable ride on road.
- Uniformly distributed tread rubber to minimize Noise levels while on the road.

## Open Tread design with optimized tread grooves :

- Ensure excellent Self-cleaning properties.

## Extra Strong Casing with High Performance Steel belts:

- Heavy Duty carcass ,enough to absorb impact and stress and returns its original shape.
- Multiple Steel Belts offers better impact resistance and exceptional puncture resistance to enhance tire more durable.



| Size                | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 560/60R22.5 HD (SB) | -        | 169 D | -  | TL   | 29                   | AG20.00       | 330      | 49        | 23        | 146       | 22         | 12780          | 87  | 40              |
| 600/55R26.5 HD (SB) | -        | 173 D |    | TL   | 30                   | AG20.00       | 399      | 52        | 24        | 157       | 24         | 14320          | 87  | 40              |
| 650/55R26.5 HD (SB) | -        | 178 D |    | TL   | 34                   | AG20.00       | 478      | 55        | 25        | 164       | 25         | 16520          | 87  | 40              |
| 600/60R30.5 HD (SB) | -        | 178 D |    | TL   | 33                   | AG20.00       | 507      | 59        | 24        | 176       | 27         | 16520          | 87  | 40              |

Note: SB- Steel Belted, HD- Heavy Duty



## Steel Belted Directional Tread for

### Superior Traction:

- Homogenous pattern for on-road and farm applications.
- Tires designed for high load and speed operations.
- Ensure traction and self-cleaning during field operation.
- Enhanced roadability and better mileage.



| Size                           | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|--------------------------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 480/45R17 (SB)                 | -        | 140 D | -  | TL   |                      | 16.00         |          | 34        | 19        | 102       | 16         | 5510           | 58  | 40              |
| 500/50R17 (SB)                 | -        | 149 D | -  | TL   | 20                   | 16.00         | 141      | 37        | 20        | 110       | 17         | 7160           | 73  | 40              |
| 520/50R17 (SB)                 | -        | 151 D | -  | TL   |                      | 16.00         |          | 38        | 20        | 112       | 17         | 7600           | 73  | 40              |
| 400/45R17.5 (SB)               | -        | 139 D | -  | TL   | 15                   | 14.00         | 87       | 32        | 16        | 95        | 14         | 5350           | 87  | 40              |
| 500/60R22.5 (SB)               | -        | 155D  | -  | TL   | 28                   | AG16.00       | 212      | 46        | 20        | 139       | 21         | 8540           | 58  | 40              |
| 560/45R22.5 (SB)               | -        | 152D  | -  | TL   | 28                   | AG16.00       | 199      | 42        | 21        | 127       | 19         | 7820           | 58  | 40              |
| 560/60R22.5 (SB)               | -        | 164D  | -  | TL   | 28                   | AG16.00       | 260      | 49        | 21        | 147       | 22         | 11010          | 73  | 40              |
| 580/65R22.5 (SB)               | -        | 166 D | -  | TL   | 28                   | AG16.00       | 280      | 52        | 22        | 156       | 24         | 11670          | 58  | 40              |
| 600/50R22.5 (SB)               | -        | 159D  | -  | TL   | 28                   | AG20.00       | 243      | 46        | 24        | 138       | 21         | 9645           | 58  | 40              |
| 600/50R22.5 (SB)               | -        | 167 D | -  | TL   | 28                   | AG20.00       | 273      | 46        | 24        | 138       | 21         | 12000          | 87  | 40              |
| 600/55R22.5 (SB)               | -        | 162 D | -  | TL   | 28                   | AG20.00       | 256      | 40        | 24        | 145       | 22         | 10460          | 58  | 40              |
| 620/40R22.5 (SB)               | -        | 154D  | -  | TL   | 28                   | AG20.00       | 226      | 42        | 25        | 126       | 19         | 8260           | 58  | 40              |
| 650/50R22.5 (SB)               | -        | 163 D | -  | TL   | 30                   | AG20.00       | 277      | 48        | 25        | 144       | 22         | 10740          | 58  | 40              |
| 710/40R22.5 (SB)               | -        | 165 D | -  | TL   | 30                   | AG24.00       | 274      | 45        | 29        | 134       | 20         | 11340          | 73  | 40              |
| 710/45R22.5 (SB)               | -        | 165 D | -  | TL   | 30                   | AG24.00       | 295      | 48        | 29        | 143       | 22         | 11340          | 58  | 40              |
| 750/45R22.5 (SB)               | -        | 169 D | -  | TL   | 30                   | AG22.00       | 298      | 49        | 29        | 147       | 22         | 12780          | 61  | 40              |
| 750/45R22.5 (SB)               | -        | 176 D | -  | TL   | 30                   | AG22.00       | 333      | 49        | 29        | 147       | 22         | 15640          | 87  | 40              |
| 600/55R26.5 (SB)               | -        | 165D  | -  | TL   | 31                   | AG20.00       | 307      | 52        | 24        | 157       | 24         | 11354          | 58  | 40              |
| 650/55R26.5 (SB)               | -        | 170D  | -  | TL   | 31                   | AG20.00       | 340      | 55        | 25        | 164       | 25         | 13220          | 58  | 40              |
| 650/55R26.5 (SB)               | -        | 178D  | -  | TL   | 31                   | AG20.00       | 390      | 55        | 26        | 164       | 25         | 16520          | 87  | 40              |
| 650/60R26.5 (SB)               | -        | 180D  | -  | TL   | 31                   | AG20.00       | 390      | 57        | 26        | 171       | 26         | 17620          | 87  | 40              |
| 650/65R26.5 (SB)               | -        | 174 D | -  | TL   | 31                   | AG20.00       | 391      | 60        | 25        | 179       | 27         | 14760          | 58  | 40              |
| 650/65R26.5 (SB)               | -        | 181 D | -  | TL   | 31                   | AG20.00       | 435      | 60        | 25        | 179       | 27         | 18170          | 73  | 40              |
| 710/50R26.5 (SB)               | -        | 170D  | -  | TL   | 31                   | AG20.00       | 375      | 54        | 29        | 163       | 25         | 13228          | 58  | 40              |
| 750/45R26.5 (SB)               | -        | 170D  | -  | TL   | 31                   | AG24.00       | 363      | 53        | 30        | 159       | 24         | 13220          | 58  | 40              |
| 800/45R26.5 (SB)               | -        | 174D  | -  | TL   | 33                   | AG28.00       | 393      | 55        | 33        | 165       | 25         | 14760          | 58  | 40              |
| 600/60R30.5 (SB)               |          | 173 D | -  | TL   | 33                   | AG20.00       | 391      | 59        | 24        | 176       | 27         | 14320          | 73  | 40              |
| 650/65R30.5 (SB)               |          | 176 D | -  | TL   | 33                   | AG20.00       | 443      | 64        | 26        | 193       | 29         | 15640          | 58  | 40              |
| 710/50R30.5 (SB)               |          | 176D  | -  | TL   | 33                   | AG20.00       | 414      | 58        | 27        | 175       | 27         | 15640          | 64  | 40              |
| 750/60R30.5 (SB)               |          | 181D  | -  | TL   | 33                   | AG24.00       | 528      | 66        | 30        | 197       | 30         | 18170          | 58  | 40              |
| 750/60R30.5 (SB) <sub>WS</sub> |          | 181D  | -  | TL   | 33                   | AG24.00       | 543      | 66        | 31        | 197       | 30         | 18170          | 58  | 40              |

Note: SB- Steel Belted, WS- Wide Section Width

# FTR 170 - [IMP] [TL]



Implements,  
Trailers,  
Slurry Tankers,  
Dump Trailer



Steel Belted



| Size             | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|------------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 800/45R30.5 (SB) | -        | 176 D | -  | TL   | 33                   | AG24.00       | 431      | 59        | 31        | 176       | 27         | 15640          | 58  | 40              |
| 850/50R30.5 (SB) | -        | 182 D | -  | TL   | 33                   | AG28.00       | 545      | 64        | 34        | 192       | 29         | 18720          | 58  | 40              |
| 800/60R32 (SB)   | -        | 185 D | -  | TL   | 35                   | DW27B         | 641      | 70        | 32        | 209       | 32         | 20370          | 58  | 40              |

Note: SB- Steel Belted, WS- Wide Section Width



## Optimized Non-Directional Block tread design with Wider Footprint:

- Provides excellent field traction while minimizing vibration at roading speed
- Low Soil Compaction in field

## High Rubber to Void ratio:

- Provides less vibration & low tyre noise at high speed on hard surfaces and ensures a low rolling resistance which reduces fuel consumption

## Open Tread design with optimized tread grooves:

- Ensure excellent Self-cleaning properties

## Solid rounded shoulder:

- Solid rounded shoulders for greater resistance to irregular wear, reduced scrub and improved maneuverability

## Strong Casing with High Performance Steel belts:

- Provides exceptional puncture resistance, with even footprint to disperse load equally
- SB offers better impact resistance and defends against stubble to enhance tyre more durability.



| Size             | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|------------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 560/45R22.5 (SB) | -        | 152 D | -  | TL   | 26                   | AG16.00       | 207      | 42        | 22        | 127       | 19         | 7820           | 58  | 40              |
| 560/60R22.5 (SB) | -        | 165 D | -  | TL   | 26                   | AG20.00       | 278      | 49        | 24        | 146       | 22         | 11354          | 73  | 40              |
| 560/60R22.5 (SB) |          | 170 D |    | TL   | 28                   | AG20.00       | 301      | 49        | 24        | 146       | 22         | 13220          | 90  | 40              |

Note: SB- Steel Belted



# ● Irrigation





## Specially Designed Tread Pattern:

- Excellent traction and outstanding self-cleaning properties.

## Robust Nylon Carcass Construction:

- Enhances its ability to carry continuous heavy loads.

## Special Tread Compound:

- Minimizes wear and extends tire life significantly.



| Size    | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|---------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 11.2-24 | -        | 110A8 | 6  | TL   | 32                   | W10           | 63       | 43        | 11        | 130       | 20         | 2330           | 26  | 25              |
| 14.9-24 | -        | 128A8 | 8  | TL   | 37                   | W13           | 104      | 49        | 15        | 147       | 22         | 3960           | 26  | 25              |
| 11.2-38 | -        | 114A8 | 6  | TL   | 32                   | W10           | 97       | 57        | 11        | 172       | 27         | 2600           | 26  | 25              |



## ● Multi-Purpose







## Large Tread Area:

- Increases flotation and minimizes ground disturbance in soil.

## Optimized Diamond Lug Pattern with Sipes:

- Reduces groove cracks, minimizes slippage, and enhances productivity.

## Heavy Under Tread:

- Ensures puncture and impact resistance, thereby reducing downtime.



| Size           | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 23.1-26 (DB)   | -        | 170A8 | 18 | TL   | 30                   | DW20B         | 319      | 62        | 23        | 187       | 28         | 13220          | 38  | 25              |
| 620/75-30 (DB) | 23.1-30  | 161A6 | 16 | TL   | 34                   | DW20A         | 371      | 66        | 24        | 197       | 30         | 10190          | 33  | 19              |
| 620/75-30 (DB) | 23.1-30  | 164A6 | 18 | TL   | 34                   | DW20A         | 373      | 66        | 24        | 197       | 30         | 11010          | 38  | 19              |
| 650/75-32 (DB) | 24.5-32  | 164A6 | 16 | TL   | 36                   | DH21          | 434      | 69        | 25        | 207       | 31         | 11010          | 30  | 19              |
| 650/75-32 (DB) | 24.5-32  | 167A6 | 18 | TL   | 36                   | DH21          | 442      | 69        | 25        | 207       | 31         | 12010          | 35  | 19              |

Note: DB- Dual Bead

# MPR 390 - [MPT] [TL]



Trailer



- Optimized tread design provides quiet run at high speeds.
- Carcass optimized for better ride comfort.
- Tread design optimized for better mileage and fuel efficiency.



| Size           | ALT Size | LI/SI | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|----------------|----------|-------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 355/60R18 (SB) | -        | 142J  | 16 | TL   | 12                   | 11            | 97       | 35        | 14        | 104       | 16         | 5840           | 87  | 62              |

Note: SB- Steel Belted



## ● Lawn & Garden







## Directional Block Tread Design with Deeper Tread:

- High Traction.
- Excellent Roadability.
- Combine the best aspects of lug-style R-1 and R-4 designs results in R-3+ tire.

## Larger Footprint with more Void:

- Protection for soil & plants.
- Low Rolling resistance results in better fuel economy.

## Special Rubber compound:

- Longer Tire Life and provides even wear on hard surfaces.

## Rounded Shoulder:

- Superior Turf Protection with Excellent Self-Cleaning properties.



| Size        | ALT Size    | LI/SI    | Type | Tread Depth (32 nds) | Preferred Rim     | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-------------|-------------|----------|------|----------------------|-------------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 215/45R10   | 18X8.50R10  | 80A8/B   | TL   | 16                   | 7.00-I-55 X 10    | 19       | 17        | 9         | 53        | 8          | 990            | 38  | 25              |
| 220/55R12   | -           | 82 A8/B  | TL   | 16                   | 7.00B / 7.00-I-90 | 32       | 22        | 9         | 65        | 10         | 1050           | 28  | 25              |
| 240/60R12   | -           | 89A8/B   | TL   | 16                   | 8.00B / 8.00-I-90 | 28       | 23        | 10        | 70        | 11         | 1280           | 35  | 25              |
| 315/55R12   | 26X12.00R12 | 85A8     | TL   | 23                   | 10.5              | 42       | 25        | 13        | 76        | 11         | 1130           | 15  | 25              |
| 315/55R12   | 26X12.00R12 | 102A8/B  | TL   | 23                   | 10.5              | 41       | 25        | 13        | 76        | 11         | 1870           | 29  | 25              |
| 220/55R14   | -           | 105 A8/B | TL   | 16                   | 7JA / 7.00-I-70   | 28       | 24        | 9         | 70        | 11         | 1410           | 38  | 25              |
| 215/65R14   | 25X12.00R12 | 90A8/B   | TL   | 23                   | 7                 | 34       | 25        | 9         | 75        | 11         | 1320           | 30  | 25              |
| 200/60R15   | -           | 83A8/B   | TL   | 14                   | 7JA / 7.00-I-70   | 25       | 24        | 8         | 73        | 11         | 1070           | 28  | 25              |
| 215/70R15   | 27X8.50R15  | 90A8/B   | TL   | 23                   | 7JAX15            | 38       | 27        | 8         | 80        | 12         | 1320           | 26  | 25              |
| 200/65R16   | -           | 94A8/B   | TL   | 24                   | W6                | 31       | 26        | 8         | 78        | 12         | 1480           | 38  | 25              |
| 200/70R16   | -           | 94A8/B   | TL   | 24                   | W6                | 32       | 27        | 8         | 81        | 13         | 1480           | 35  | 25              |
| 240/70R16   | -           | 104 A8/B | TL   | 27                   | W8                | 45       | 29        | 10        | 87        | 13         | 1980           | 35  | 25              |
| 260/70R16   | -           | 109 A8/B | TL   | 29                   | W8                | 53       | 30        | 10        | 91        | 14         | 2270           | 35  | 25              |
| 280/70R16   | -           | 112 A8/B | TL   | 30                   | W8L               | 59       | 31        | 11        | 94        | 14         | 2470           | 35  | 25              |
| 305/70R16.5 | 12R16.5     | 105A8/B  | TL   | 34                   | 10                | 75       | 33        | 12        | 100       | 15         | 2040           | 23  | 25              |
| 355/65R17.5 | 14R17.5     | 130A8    | TL   | 38                   | 10                | 118      | 36        | 14        | 101       | 16         | 4190           | 45  | 25              |
| 260/70R18   | -           | 114 A8/B | TL   | 29                   | W8                | 58       | 32        | 10        | 97        | 15         | 2600           | 41  | 25              |
| 280/70R18   | -           | 114 A8/B | TL   | 30                   | W8L               | 64       | 33        | 11        | 100       | 15         | 2600           | 35  | 25              |
| 385/65R19.5 | -           | 130A8/B  | TL   | 38                   | 12                | 118      | 36        | 15        | 117       | 18         | 4180           | 35  | 25              |
| 300/70R20   | -           | 110 A8/B | TL   | 30                   | W9                | 80       | 37        | 12        | 112       | 17         | 2330           | 23  | 25              |
| 320/70R20   | -           | 113 A8/B | TL   | 30                   | W10               | 87       | 39        | 13        | 116       | 18         | 2530           | 23  | 25              |
| 380/70R20   | -           | 122 A8/B | TL   | 34                   | W12               | 122      | 43        | 15        | 127       | 19         | 3300           | 23  | 25              |
| 380/70R24   | -           | 125 A8/B | TL   | 34                   | W12               | 138      | 47        | 15        | 140       | 21         | 3630           | 23  | 25              |
| 420/70R24   | -           | 130 A8/B | TL   | 35                   | W13               | 165      | 49        | 16        | 147       | 22         | 4190           | 23  | 25              |

# Forestry





## ● Agro Forestry





## Robust Lug Design:

- Lug is designed for excellent grip, high traction abilities, low slip , suitable for many kinds of Agro-Forestry uses.

## Reinforced Sidewall:

- Reinforced sidewall and high turn of plies around strong bead to guarantee minimum impact and perforation.

## Special compound equipped with Steel belt:

- To reduce the risk of tire puncture and cut due to branches, tree stumps or stone, AFB 821 tractor tire has **steel belt protection**, strong carcass and **puncture resistant compound** suitable for Agro Forestry work.



| Size             | ALT Size | LI/SI  | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|------------------|----------|--------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 12.4-24 (SB, CR) | -        | 130A8  | 16 | TL   | 43                   | W11           | 135      | 46        | 12        | 137       | 21         | 4190           | 41  | 25              |
| 13.6-24 (SB, CR) | -        | 136A8  | 16 | TL   | 46                   | W12           | 157      | 48        | 14        | 143       | 22         | 4930           | 41  | 25              |
| 14.9-24 (SB, CR) | -        | 140A8  | 16 | TL   | 43                   | W13           | 172      | 50        | 15        | 150       | 23         | 5510           | 41  | 25              |
| 16.9-30 (SB, CR) | -        | 149A8  | 16 | TL   | 47                   | W15L          | 250      | 59        | 17        | 176       | 27         | 7160           | 41  | 25              |
| 18.4-30 (SB, CR) | -        | 151A8  | 16 | TL   | 48                   | W16L          | 286      | 61        | 18        | 184       | 28         | 7600           | 41  | 25              |
| 16.9-34 (SB, CR) | -        | 151A8  | 16 | TL   | 47                   | W15L          | 276      | 63        | 17        | 188       | 29         | 7600           | 41  | 25              |
| 18.4-34 (SB, CR) | -        | 155A8  | 16 | TL   | 48                   | W16L          | 311      | 65        | 18        | 196       | 30         | 8540           | 41  | 25              |
| 18.4-38 (SB, CR) |          | 155 A8 | 14 | TL   | 48                   | W16L          | 372      | 69        | 18        | 207       | 32         | 8540           | 38  | 25              |

Note: SB - Steel Belted, CR - Cut Resistant



## ● Log Skidder



# LSB 780 - [LS-2] [TL]



Log  
Skidder



- Uncompromising tread design for excellent self-cleaning and longer tread life.
- Optimized lateral stiffness provides better steer control and Maneuverability on wet and dry surfaces.
- Reinforced carcass & shoulder areas with special compound for protection from frequent puncture & cut.



| Size              | ALT Size | LI/SI         | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|-------------------|----------|---------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 18.4-26 (SB)      | -        | 152 A6        | 16 | TL   | 67                   | DW16A         | 396      | 58        | 18        | 174       | 26         | 7830           | 40  | 20              |
| 23.1-26 (SB)      | -        | 160A6/172A2   | 16 | TL   | 72                   | DW20B         | 306      | 64        | 23        | 192       | 29         | 9910           | 35  | 19              |
| 28L-26 (SB, DB)   | -        | 165A6         | 20 | TL   | 76                   | DW25B         | 745      | 65        | 28        | 194       | 29         | 11400          | 35  | 20              |
| 28L-26 (SB, DB)   |          | 173 A6        | 26 | TL   | 76                   | DW25B         | 770      | 65        | 28        | 194       | 29         | 12890          | 55  | 25              |
| 24.5-32 (SB, DB)  | -        | 169A6 / 181A2 | 20 | TL   | 81                   | DH21          | 908      | 72        | 25        | 216       | 33         | 12790          | 40  | 20              |
| 30.5L-32 (SB, DB) | -        | 170A6         | 20 | TL   | 82                   | DH27          | 1074     | 73        | 31        | 217       | 33         | 13225          | 30  | 20              |
| 30.5L-32 (SB, DB) | -        | 176A6         | 26 | TL   | 82                   | DH27          | 1072     | 73        | 31        | 217       | 33         | 15700          | 40  | 20              |
| 30.5L-32 (SB, DB) | -        | 180A6         | 32 | TL   | 82                   | DH27          | 1106     | 73        | 31        | 217       | 33         | 17640          | 49  | 20              |
| 35.5L-32 (SB, DB) | -        | 183A6         | 26 | TL   | 84                   | DH31H         | 1372     | 79        | 36        | 237       | 35         | 19270          | 35  | 20              |
| 35.5L-32 (SB, DB) | -        | 187A6         | 32 | TL   | 84                   | DH31H         | 1403     | 79        | 36        | 237       | 35         | 21480          | 44  | 20              |

Note: SB - Steel Belted DB- Dual Bead



## ● Forestry Forwarder





# FFB 840 - [LS-2] [TL]



Forestry  
Forwarder



- FFB 840 is a bias steel-belted tire, suitable for forestry applications with forwarders and harvesters.
- The unique tread design and lug angle provide high traction and low slip abilities for improved fuel economy.
- With extensive inter-lug space provides Excellent self-cleaning properties and functions well with or without tracks, but tracks can be added for more demanding environments.
- The tire is equipped with reinforced steel belt for increased resistance to punctures and high load carrying capacity.
- The Reinforced bead area provides resistant to rim slip.
- Large tread width contributes to low soil compaction and driver comfort by providing the wider footprint.
- A Special tread and sidewall compound coupled with robust sidewalls and a high under tread, offers enhanced puncture resistance.



| Size             | ALT Size | LI/SI                          | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|------------------|----------|--------------------------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 710/40-22.5 (SB) | -        | 161A8<br>HT -161A2\LT -168A2   | 20 | TL   | 53                   | AG24.00       | 351      | 46        | 28        | 138       | 21         | 10190          | 73  | 25              |
| 600/55-26.5 (SB) | -        | 165A8<br>HT -165A2\LT -172A2   | 20 | TL   | 61                   | AG20.00       | 430      | 53        | 24        | 159       | 24         | 11340          | 73  | 25              |
| 710/45-26.5 (SB) | -        | 168A8<br>HT -168A2\LT -175A2   | 20 | TL   | 61                   | AG24.00       | 486      | 53        | 28        | 159       | 24         | 12330          | 73  | 25              |
| 710/55-26.5 (SB) | -        | 179A8<br>HT -179A2 \ LT- 186A2 | 24 | TL   | 62                   | AG24.00       | 586      | 59        | 28        | 178       | 27         | 17070          | 73  | 25              |
| 800/40-26.5 (SB) |          | 170A8<br>HT -170A2\LT -177A2   | 20 | TL   | 61                   | AG28.00       | 538      | 53        | 32        | 159       | 24         | 13220          | 73  | 25              |

Note: SB- Steel Belted



## Optimized Tread Design:

- Excellent Traction
- Unique tread design with inter lug-terraces for optimum self-cleaning
- Effective track compatibility and enhance lateral stability

## Centre Tie Bar:

- Minimizes lug shuffling in operation
- Strong Lug Base.

## Reinforced Steel Belts:

- Provides exceptional puncture resistance & Carry High Load capacity.

## Designed for tracks:

- A perfect fit with tracks for exceptional grip.

## Stubble guard compound equipped with Robust sidewall:

- Protection against sharp objects in operation.

## Reinforced Bead Area:

- Better mounting & Resistance to Slip.



| Size             | ALT Size | LI/SI  | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|------------------|----------|--------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 710/40-22.5 (SB) | -        | 167A8  | 24 | TL   | 38                   | AG24.00       | 389      | 46        | 28        | 138       | 21         | 12000          | 87  | 25              |
| 600/55-26.5 (SB) |          | 165A8  | 20 | TL   | 44                   | AG20.00       | 459      | 53        | 24        | 24        | 159        | 11340          | 80  | 25              |
| 710/45-26.5 (SB) |          | 173 A8 | 24 | TL   | 44                   | AG24.00       | 532      | 53        | 28        | 24        | 159        | 14320          | 87  | 25              |
| 750/55-26.5 (SB) |          | 185 A8 | 26 | TL   | 44                   | AG24.00       | 647      | 58        | 30        | 26        | 174        | 20370          | 94  | 25              |

Note: SB- Steel Belted





## Flotation Tread Design:

- Excellent Traction.
- Better Self Cleaning.

## Strong Nylon Carcass:

- High Load Carrying Capacity

## Overlap of lugs at centre:

- Provided good Roadability
- Low Tread wear
- Smooth Ride.

## Optimized Bead Area:

- Minimizes Bead failure in operation.
- Ease of mounting.
- Resistance to Rim slip.

## SSR compound (Special Stubble Resistant):

- Longer Tire Life and defense against stubble which provides better protection on field

## Reinforced Steel belts:

- Increased resistance to punctures and a high carrying capacity.



| Size             | ALT Size | LI/SI                            | PR | Type | Tread Depth (32 nds) | Preferred Rim | Wt (lbs) | OD inches | SW inches | RC inches | SLR inches | Max Load (lbs) | Psi | Max Speed (mph) |
|------------------|----------|----------------------------------|----|------|----------------------|---------------|----------|-----------|-----------|-----------|------------|----------------|-----|-----------------|
| 400/60-15.5 (SB) | -        | 152 A8 / 148 B<br>140 A8 / 135 B | 20 | TL   | 23                   | AG 13.00      | 101      | 34        | 16        | 103       | 16         | 7810           | 73  | 25              |

Note: SB- Steel Belted

# ● Tire Care & Usage



- **Section Height:**

The height of a tire from the nominal rim diameter to the top of the tread.

- **Section Width:**

The width of a tire including normal sidewalls, but not including protective side ribs, bars, or other decorations.

- **Overall Diameter:**

Twice the section height (unloaded) plus the nominal rim diameter.

- **Rim Width:**

The measurement on the inside of the rim between the two flanges.

- **Rim Diameter Code:**


The nominal rim diameter in inches.

- **Rolling Circumference:**

The distance an inflated and loaded tire will roll in one revolution.

- **Aspect Ratio:**

Used to describe the ratio of tire "section height" to "section width."  
A tire with an aspect ratio of 85 would have a tire section height equal to 85% of the tire's width.

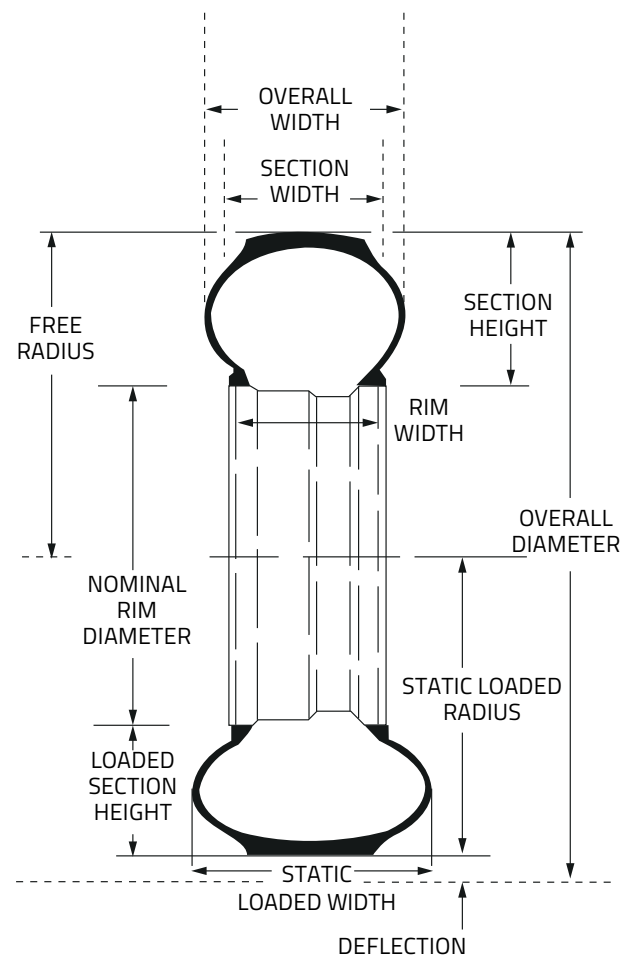

## Conversion factors

|                             |                                |                               |                                |
|-----------------------------|--------------------------------|-------------------------------|--------------------------------|
| 1 millimetre (mm)           | = 0.03937 inches               | 1 inch (")                    | = 25.4 millimetres             |
| 1 metre (m)                 | = 1.09361 yards                | 1 yard                        | = 0.9144 metres                |
| 1 kilometre (km)            | = 0.62137 miles                | 1 mile (mi)                   | = 1.609344 kilometres          |
| 1 litre (l)                 | = 0.21997 gallons (UK)         | 1 gallon (UK)                 | = 4.5461 litres                |
| 1 litre (l)                 | = 0.26417 gallons (USA)        | 1 gallon (USA)                | = 3.7854 litres                |
| 1 gram (g)                  | = 0.035274 ounces              | 1 ounce (oz)                  | = 28.34952 grams               |
| 1 kilogram (kg)             | = 2.205 pounds                 | 1 pound (lb)                  | = 0.45359 kilograms            |
| 1 kilometre per hour (km/h) | = 0.62137 miles per hour       | 1 mile per hour (mph)         | = 1.609344 kilometres per hour |
| 1 kilopascal (kPa)          | = 0.145 pounds per square inch | 1 pound per square inch (psi) | = 6.895 kilopascal             |
| 1 bar                       | = 100 kilopascal               | 1 pound per square inch (psi) | = 0.06895 bar                  |
| 1 kilowatt (kW)             | = 1.34 horsepower              | 1 horsepower (HP)             | = 0.746 kilowatts              |
| 1 Newton metre (N.m)        | = 0.113 inch pound             | 1 inch pound (in-lb)          | = 8.85 inch-pound              |

## Pressure conversion table

| PSI | BAR | KPA |
|-----|-----|-----|
| 10  | 0.7 | 70  |
| 11  | 0.8 | 80  |
| 12  | 0.9 | 90  |
| 13  | 0.8 | 80  |
| 14  | 1   | 100 |
| 15  | 1   | 100 |
| 16  | 1.1 | 110 |
| 17  | 1.2 | 120 |
| 18  | 1.2 | 120 |
| 19  | 1.3 | 130 |
| 20  | 1.4 | 140 |
| 21  | 1.4 | 140 |
| 22  | 1.5 | 150 |
| 23  | 1.6 | 160 |
| 24  | 1.7 | 170 |
| 25  | 1.7 | 170 |
| 26  | 1.8 | 180 |
| 27  | 1.9 | 190 |
| 28  | 1.9 | 190 |

| PSI | BAR | KPA |
|-----|-----|-----|
| 29  | 2   | 200 |
| 30  | 2.1 | 210 |
| 31  | 2.2 | 220 |
| 32  | 2.1 | 210 |
| 33  | 2.3 | 230 |
| 34  | 2.3 | 230 |
| 35  | 2.4 | 240 |
| 36  | 2.5 | 250 |
| 37  | 2.6 | 260 |
| 38  | 2.6 | 260 |
| 39  | 2.7 | 270 |
| 40  | 2.8 | 280 |
| 41  | 2.8 | 280 |
| 42  | 2.9 | 290 |
| 43  | 3   | 300 |
| 44  | 3   | 300 |
| 45  | 3.1 | 310 |
| 46  | 3.2 | 320 |
| 47  | 3.2 | 320 |

| PSI | BAR | KPA |
|-----|-----|-----|
| 48  | 3.3 | 330 |
| 49  | 3.4 | 340 |
| 50  | 3.5 | 350 |
| 51  | 3.4 | 340 |
| 52  | 3.6 | 360 |
| 53  | 3.7 | 370 |
| 54  | 3.7 | 370 |
| 55  | 3.8 | 380 |
| 56  | 3.9 | 390 |
| 57  | 3.9 | 390 |
| 58  | 4   | 400 |
| 59  | 4.1 | 420 |
| 60  | 4.1 | 410 |
| 61  | 4.2 | 420 |
| 62  | 4.3 | 430 |
| 63  | 4.3 | 430 |
| 64  | 4.4 | 440 |
| 65  | 4.5 | 450 |
| 66  | 4.5 | 450 |



## Storage

- Keep the tires clean and away from heat, light, ozone or hydrocarbon sources.
- Avoid prolonged exposure of the tires to direct sunlight.
- Avoid any contact with grease, petrol, volatile solvents or other substances that may deteriorate the rubber.
- Avoid horizontal storage for tubeless tires, only small size tires may be stacked or stored flat (maximum 6 months).
- When tires are stored flat (horizontal), the position must be lug against lug.
- Reduce inflation pressure when tires are stored fitted on rims.
- Ensure there is no water or moisture inside the tire.
- Never store tires directly in contact with the ground for long periods.

## Tire repairs

For safety reasons, repairs should only be carried out by specialists using the correct tools.

## Proper use of tires

- When loading tires you have to consider the correlation between speed, inflation pressure and load capacity.
- Overloading results in premature tire failure. Use the technical documentation and inflation tables which show the load and pressure figures for different operating speeds.
- Underinflation results not only in incorrect tread wear but also in ply separation and eventually further damage to the ply. Overinflation makes the tire stiff and decreases its resistance against hits, leading to ply tear.

## Demounting

### 1. Before Demounting

- Before loosening any nuts or clamps securing the rim assembly to a vehicle
- Always exhaust all air from a single tyre and from both tyres of a dual assembly by removing the valve core prior to removing any wheel components such as nuts and rim clamps.
- Never attempt to demount a tyre from the rim unless you have confirmed that it is completely deflated. Failing to follow this precaution can result in the assembly bursting with enough force to cause serious injury/death.
- Check the valve stem by running a piece of wire through the stem to make sure it is not plugged by foreign material
- A broken rim part under pressure can blow apart and cause serious injury or death.

### 2. During Demounting

- Keep fingers clear and stand one side and hold the tools with one hand while applying pressure on Demounting tools to the rim flanges to unseat tyre beads

### 3. After Demounting

- Clean rims and repaint to stop corrosion


## Mounting

### 1. Before Mounting

- Check rim components for cracks. Replace all cracked, badly worn, damaged and severely rusted component with new parts of the same size and type.
- Do not attempt to rework any rim component that is cracked, broken or damaged. Replace the same with new components.
- All parts of multipiece rim are to be assembled properly.
- Use wire brush to remove rust, dirt and other foreign matter from the rim surface, particularly on the bead seats and O-ring slot. Ensure to remove any tyre fill from the rim.
- Always use a new O-ring for tubeless tyres.
- Carefully inspect the inside of the casing for damage or foreign materials, and remove any dirt, liquids, or debris before mounting.
- Lubricate both beads with a thin solution of vegetable oil soap in water or an equivalent rubber lubricant recommended for this purpose. (Avoid petroleum-based solutions or silicones.)

## 2. During Mounting and Inflation

- Do not hammer any component of the rim while the tyre is inflated or partially inflated.
- Make sure all components are properly seated prior to inflation.
- NEVER inflate beyond 35 psi to seat beads. Use this warning symbol



- Use safety cage while inflating the tyre. Never stand close to a tyre and rim assembly while it is being inflated
- Centring the tyre on the rim is extremely important to prevent broken beads.

## 3. After Inflation

- Ensure no air leakage specially in tubeless tyres.

## Recommendations to extend the lifespan of a tire

### Tire pressure

Correct inflation pressure is important for performance, durability, comfort and traction. It is of crucial importance for the life expectancy of your tires that you adjust the tire pressure according to usage and check it regularly. To ensure accurate measurement, the pressure gauge must be calibrated once a year. Measurement of tire inflation pressure must be done when the tires are cold. If the pressure in a warm tire is correct, then it would be too low when the tire has cooled.

### Inflation pressure too low

Underinflation can reduce the lifespan due to:

- Damaged carcass cord plies, which can render the tire unusable
- Increased wear
- Carcass damage close to the bead

### Road use and operation in the field

These two kinds of usages require different tire inflation pressures. Allowance has been made for this in the tire pressure graphs. Radial and crossply tires must not be used on the same axle, as this can lead to unstable handling.

### Visual check

Tires must be checked regularly for damage. Incision damage can be particularly harmful to the cord tissue layers of the tread.

### Oil and grease

To avoid damage to the rubber, tires should not come in contact with oil and grease.

### Frost protection

To protect against frost when water ballasting, sufficient calcium chloride should be added. Please consult your supplier of calcium chloride about the right ratio.

### Slippage of the tire

The following can increase the likelihood of slippage of the tire on the rim:

- Tire pressure too low
- Faulty fitting of the tire bead on the rim
- Overuse of lubricant when fitting a tire
- Wrong rim size

The minimum tire pressure for high-traction work (for example, ploughing) is 11.6 Psi when using an inner tube. A lower pressure increases the chances of the tire turning on the rim and tearing off the valve.



## Direction of steering wheels on four wheel drive tractors

When fitting or changing tires ensure that the directional arrow on the sidewall is pointing forward. It is possible to fit the front tires in such a way that the tread turns against the direction of rotation on four wheel drive tractors that are primarily used for transport activities. This will extend the lifespan of the tires. Such fitting is not recommended for field activities, as it radically reduces traction and self-cleaning properties.

## Transport instructions



## Rim and Wheel Discs

A wheel is made up of a rim and a wheel disc that are fixed to or detachable from each other and must exactly match. The rim size is of crucial importance to the tire/rim combination.

## Size designations of rims

Two wheels are shown here with the associated meanings of the size indications.

## Rim choice

When using tubeless tires, tubeless rims should also be used. A protective flap must always be used when combining inner tubes with multipiece rims. This prevents damage to the inner tube.

## The most important size indications of wheel discs are the following:

G = diameter of the central hole

S = pitch circle diameter of the stud holes and number of stud holes

N = diameter cleat circle and number of cleats


D = diameter stud hole and stud hole shape

E = extra stud holes in case of double fitting


B = outside diameter disc

## Warning

The diameter of different rim sizes may look very similar, but they're not equal as you can see in the table.




| Single rim                                                                                                                                            | Multi-piece rim                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| 4.00 E x 16                                                                                                                                           | 13 - 508                                                                                                                    |
| <p>This means:</p> <p>4.00 = rim width code (inches)</p> <p>E = rim flange height</p> <p>x = one piece rim</p> <p>16 = rim diameter code (inches)</p> | <p>This means:</p> <p>13 = rim width code (inches)</p> <p>- = rim flange height</p> <p>508 = rim diameter code (inches)</p> |

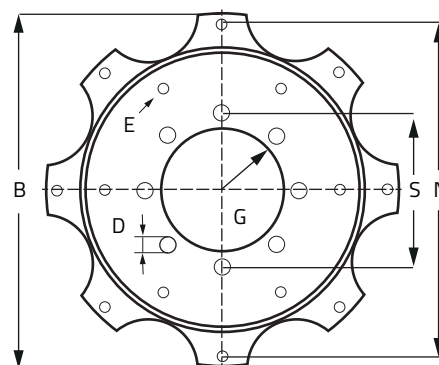

| "Small" overall diameter |                     | "Large" overall diameter |                     |
|--------------------------|---------------------|--------------------------|---------------------|
| Rim size code            | Rim diameter D (mm) | Rim size code            | Rim diameter D (mm) |
| 430mm                    | 430.9               | 17                       | 436.6               |
| 15                       | 380.2               | 15.3                     | 388.3               |
| 508mm                    | 508                 | 20                       | 512.8               |

## Always use the rim stipulated

If you use a rim which is too narrow, the tread will be convex and, as is the case where tire pressure is too high, there will be excessive wear of the centre of the tread. The fitting of a tire to the wrong rim can lead to highly dangerous consequences! Fitting a "large" tire (like 10.0/75-15.3) on a smaller rim (say rim size code 15) is dangerous. The tire is loose-fitting and in extreme conditions can "blow-off" the ring. Rim chafing can be the consequence. Fitting a "smaller" tire on a rim which is too large in overall diameter can also be dangerous! As the bead diameter of the tire is smaller than the base rim flange diameter, by inflating the tire, the chances of the bead breaking and the tire exploding are high.

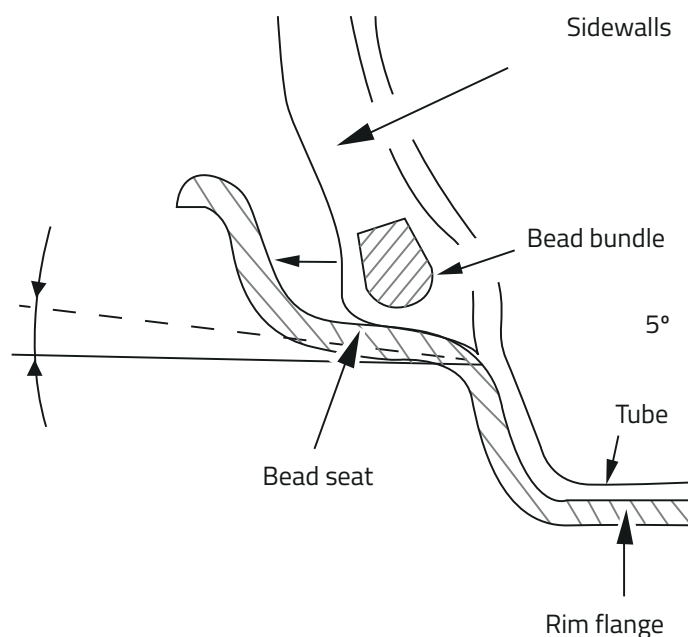

# SKU / EAN Code: Bias and Redial

| Sr. No | SKU Code   | EAN Number    | Application                                                                                  | Rim Dia. | Tire Size | Pattern                                                                                                    | PR / LISI   |
|--------|------------|---------------|----------------------------------------------------------------------------------------------|----------|-----------|------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3001010028 | 8904365501825 | <br>Tractor | 15       | 5.00-15   | <br>TSB 110<br>(TT) F-2 | 6 / 76 A8   |
| 2      | 3001010001 | 8904365500323 |                                                                                              | 16       | 5.50-16   |                                                                                                            | 6 / 82 A8   |
| 3      | 3001010002 | 8904365500330 |                                                                                              |          | 6.00-16   |                                                                                                            | 6 / 85 A8   |
| 4      | 3001010003 | 8904365500446 |                                                                                              |          | 6.00-16   |                                                                                                            | 8 / 91 A8   |
| 5      | 3001010029 | 8904365501832 |                                                                                              |          | 6.50-16   |                                                                                                            | 6 / 88 A8   |
| 6      | 3001010017 | 8904365500354 |                                                                                              |          | 7.50-16   |                                                                                                            | 8 / 99 A8   |
| 7      | 3001010027 | 8904365501511 |                                                                                              |          | 7.50-16   |                                                                                                            | 10 / 104 A8 |
| 8      | 3001010005 | 8904365500392 |                                                                                              |          | 9.00-16   |                                                                                                            | 10 / 111 A8 |
| 9      | 3001010015 | 8904365500408 |                                                                                              |          | 10.00-16  |                                                                                                            | 10 / 115 A8 |
| 10     | 3001010016 | 8904365500415 |                                                                                              |          | 11.00-16  |                                                                                                            | 10 / 118 A8 |
| 11     | 3001010008 | 8904365500378 |                                                                                              | 18       | 7.50-18   |                                                                                                            | 8 / 102 A8  |
| 12     | 3001010030 | 8904365501849 |                                                                                              | 19       | 4.00-19   |                                                                                                            | 4 / 69A8    |
| 13     | 3001010010 | 8904365500347 |                                                                                              |          | 6.00-19   |                                                                                                            | 6 / 89 A8   |
| 14     | 3001010011 | 8904365500385 |                                                                                              | 20       | 7.50-20   |                                                                                                            | 8 / 105 A8  |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size    | Pattern                                                                                                      | PR / LISI   |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|--------------|--------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3001010018 | 8904365500422 | <br>Tractor | 16       | 4.50-16      | <br>TSB 111<br>(TT) F-2 | 6 / 74 A8   |
| 2      | 3001010032 | 8904365502617 |                                                                                                |          | 5.00-16      |                                                                                                              | 6 / 76 A8   |
| 3      | 3001010019 | 8904365500439 |                                                                                                |          | 5.50-16      |                                                                                                              | 6 / 82 A8   |
| 4      | 3001010020 | 8904365500453 |                                                                                                |          | 6.00-16      |                                                                                                              | 8 / 91 A8   |
| 5      | 3001010043 | 8904365509357 |                                                                                                |          | 6.00-16 (HD) |                                                                                                              | 8 / 91 A8   |
| 6      | 3001010021 | 8904365500460 |                                                                                                |          | 6.50-16      |                                                                                                              | 8 / 94 A8   |
| 7      | 3001010041 | 8904365509012 |                                                                                                |          | 6.50-16 (HD) |                                                                                                              | 8 / 94 A8   |
| 8      | 3001010022 | 8904365500477 |                                                                                                |          | 7.50-16      |                                                                                                              | 8 / 99 A8   |
| 9      | 3001010042 | 8904365509005 |                                                                                                |          | 7.50-16 (HD) |                                                                                                              | 8 / 99 A8   |
| 10     | 3001010045 | 8904365511602 |                                                                                                |          | 7.50-16      |                                                                                                              | 14 / 119 A8 |
| 11     | 3001010023 | 8904365500484 |                                                                                                | 18       | 7.50-18      |                                                                                                              | 8 / 102 A8  |
| 12     | 3001010024 | 8904365500491 |                                                                                                | 19       | 6.00-19      |                                                                                                              | 8 / 91 A8   |
| 13     | 3001010025 | 8904365500507 |                                                                                                | 20       | 6.50-20      |                                                                                                              | 8 / 93 A8   |
| 14     | 3001010026 | 8904365500514 |                                                                                                |          | 7.50-20      |                                                                                                              | 8 / 105 A8  |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size   | Pattern                                                                                                      | PR / LISI   |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|-------------|--------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3001010033 | 8904365503867 | <br>Tractor | 15       | 9.5L-15 SL  | <br>TSB 112<br>(TL) F-2 | 8 / 102 A8  |
| 2      | 3001010034 | 8904365503874 |                                                                                                |          | 11L-15 SL   |                                                                                                              | 8 / 106 A8  |
| 3      | 3001010035 | 8904365503881 |                                                                                                | 16       | 10.00-16 SL |                                                                                                              | 8 / 110 A8  |
| 4      | 3001010036 | 8904365503898 |                                                                                                |          | 11.00-16 SL |                                                                                                              | 8 / 114 A8  |
| 5      | 3001010040 | 8904365509029 |                                                                                                |          | 11.00-16 SL |                                                                                                              | 12 / 123 A8 |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size | Pattern                                                                                                         | PR / LISI  |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|-----------|-----------------------------------------------------------------------------------------------------------------|------------|
| 1      | 3001010012 | 8904365505007 | <br>Tractor | 16       | 6.00-16   | <br>BOSS TS 10<br>(TT) F-2 | 8 / 94 A6  |
| 2      | 3001010013 | 8904365505014 |                                                                                                |          | 6.50-16   |                                                                                                                 | 8 / 98 A6  |
| 3      | 3001010014 | 8904365505021 |                                                                                                |          | 7.50-16   |                                                                                                                 | 8 / 103 A6 |



| Sr. No | SKU Code   | EAN Number    | Application                                                                                   | Rim Dia. | Tire Size     | Pattern                                                                                                           | PR / LISI   |
|--------|------------|---------------|-----------------------------------------------------------------------------------------------|----------|---------------|-------------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3001030092 | 8904365508220 | Tractor<br> | 16       | 6.50-16       | <br>TDB 120<br>(TT/TL)<br>R-1 | 8 / 94 A8   |
| 2      | 3001030050 | 8904365502747 |                                                                                               |          | 8.00-16       |                                                                                                                   | 6 / 88 A8   |
| 3      | 3001030126 | 8904365515037 |                                                                                               |          | 9.5-16*       |                                                                                                                   | 8 / 98 A8   |
| 4      | 3001030093 | 8904365508213 |                                                                                               | 18       | 8-18          |                                                                                                                   | 12 / 109 A8 |
| 5      | 3001030123 | 8904365509616 |                                                                                               |          | 8.00-18 HD    |                                                                                                                   | 12 / 116 A8 |
| 6      | 3001030051 | 8904365502679 |                                                                                               | 20       | 8.3-20        |                                                                                                                   | 6 / 92 A8   |
| 7      | 3001030052 | 8904365502686 |                                                                                               |          | 9.5-20        |                                                                                                                   | 6 / 99 A8   |
| 8      | 3001030055 | 8904365502815 |                                                                                               |          | 11.2-20       |                                                                                                                   | 8 / 107 A8  |
| 9      | 3001030097 | 8904365507735 |                                                                                               |          | 11.2-20 SB SG |                                                                                                                   | 8 / 107 A8  |
| 10     | 3001030001 | 8904365500095 |                                                                                               | 24       | 8.3-24        |                                                                                                                   | 8 / 105 A8  |
| 11     | 3001030117 | 8904365508831 |                                                                                               |          | 8.3-24*       |                                                                                                                   | 8 / 105 A8  |
| 12     | 3001030002 | 8904365500101 |                                                                                               |          | 9.5-24        |                                                                                                                   | 8 / 112 A8  |
| 13     | 3001030100 | 8904365508848 |                                                                                               |          | 9.5-24*       |                                                                                                                   | 8 / 112 A8  |
| 14     | 3001030086 | 8904365506431 |                                                                                               |          | 9.5-24        |                                                                                                                   | 12 / 116 A8 |
| 15     | 3001030003 | 8904365500118 |                                                                                               |          | 11.2-24       |                                                                                                                   | 8 / 116 A8  |
| 16     | 3001030045 | 8904365502150 |                                                                                               |          | 11.2-24*      |                                                                                                                   | 8 / 116 A8  |
| 17     | 3001030065 | 8904365504772 |                                                                                               |          | 11.2-24       |                                                                                                                   | 12 / 124 A8 |
| 18     | 3001030004 | 8904365500132 |                                                                                               |          | 12.4-24       |                                                                                                                   | 8 / 121 A8  |
| 19     | 3001030101 | 8904365508855 |                                                                                               |          | 12.4-24*      |                                                                                                                   | 8 / 121 A8  |
| 20     | 3001030039 | 8904365502068 |                                                                                               |          | 12.4-24       |                                                                                                                   | 12 / 128 A8 |
| 21     | 3001030007 | 8904365500156 |                                                                                               |          | 13.6-24       |                                                                                                                   | 8 / 123 A8  |
| 22     | 3001030102 | 8904365508862 |                                                                                               |          | 13.6-24*      |                                                                                                                   | 8 / 123 A8  |
| 23     | 3001030066 | 8904365504789 |                                                                                               |          | 13.6-24       |                                                                                                                   | 12 / 130 A8 |
| 24     | 3001030009 | 8904365500187 |                                                                                               |          | 14.9-24       |                                                                                                                   | 8 / 128 A8  |
| 25     | 3001030103 | 8904365509630 |                                                                                               |          | 14.9-24*      |                                                                                                                   | 8 / 128 A8  |
| 26     | 3001030033 | 8904365501771 |                                                                                               |          | 14.9-24       |                                                                                                                   | 12 / 136 A8 |
| 27     | 3001030014 | 8904365500217 |                                                                                               |          | 16.9-24       |                                                                                                                   | 8 / 133 A8  |
| 28     | 3001030108 | 8904365509647 |                                                                                               |          | 16.9-24*      |                                                                                                                   | 8 / 133 A8  |
| 29     | 3001030034 | 8904365501788 |                                                                                               |          | 16.9-24       |                                                                                                                   | 12 / 143 A8 |
| 30     | 3001030056 | 8904365502822 |                                                                                               | 26       | 14.9-26       |                                                                                                                   | 10 / 129 A8 |
| 31     | 3001030087 | 8904365506448 |                                                                                               |          | 14.9-26       |                                                                                                                   | 12 / 134 A8 |
| 32     | 3001030057 | 8904365502839 |                                                                                               |          | 16.9-26       |                                                                                                                   | 10 / 133 A8 |
| 33     | 3001030010 | 8904365500125 |                                                                                               | 28       | 11.2-28       |                                                                                                                   | 8 / 118 A8  |
| 34     | 3001030104 | 8904365508879 |                                                                                               |          | 11.2-28*      |                                                                                                                   | 8 / 118 A8  |
| 35     | 3001030011 | 8904365500149 |                                                                                               |          | 12.4-28       |                                                                                                                   | 8 / 123 A8  |
| 36     | 3001030105 | 8904365508886 |                                                                                               |          | 12.4-28*      |                                                                                                                   | 8 / 123 A8  |
| 37     | 3001030067 | 8904365504796 |                                                                                               |          | 12.4-28       |                                                                                                                   | 12 / 131 A8 |
| 38     | 3001030012 | 8904365500170 |                                                                                               |          | 13.6-28       |                                                                                                                   | 8 / 125 A8  |
| 39     | 3001030106 | 8904365509654 |                                                                                               |          | 13.6-28*      |                                                                                                                   | 8 / 125 A8  |
| 40     | 3001030013 | 8904365500200 |                                                                                               |          | 14.9-28       |                                                                                                                   | 8 / 130 A8  |
| 41     | 3001030107 | 8904365508893 |                                                                                               |          | 14.9-28*      |                                                                                                                   | 8 / 130 A8  |
| 42     | 3001030040 | 8904365502075 |                                                                                               |          | 14.9-28       |                                                                                                                   | 12 / 137 A8 |
| 43     | 3001030015 | 8904365500231 |                                                                                               |          | 16.9-28       |                                                                                                                   | 8 / 135 A8  |
| 44     | 3001030109 | 8904365508909 |                                                                                               |          | 16.9-28*      |                                                                                                                   | 8 / 135 A8  |
| 45     | 3001030036 | 8904365501931 |                                                                                               |          | 16.9-28       |                                                                                                                   | 12 / 143 A8 |
| 46     | 3001030058 | 8904365502846 |                                                                                               | 30       | 7.2-30        |                                                                                                                   | 6 / 96 A8   |
| 47     | 3001030053 | 8904365502754 |                                                                                               |          | 9.5-30        |                                                                                                                   | 6 / 111 A8  |
| 48     | 3001030059 | 8904365502853 |                                                                                               |          | 14.9-30       |                                                                                                                   | 8 / 127 A8  |
| 49     | 3001030016 | 8904365500248 |                                                                                               |          | 16.9-30       |                                                                                                                   | 8 / 137 A8  |
| 50     | 3001030110 | 8904365508916 |                                                                                               |          | 16.9-30       |                                                                                                                   | 8 / 137 A8  |
| 51     | 3001030035 | 8904365501795 |                                                                                               |          | 16.9-30       |                                                                                                                   | 12 / 144 A8 |
| 52     | 3001030073 | 8904365505656 |                                                                                               |          | 16.9-30       |                                                                                                                   | 14 / 146 A8 |
| 53     | 3001030019 | 8904365500279 |                                                                                               |          | 18.4-30       |                                                                                                                   | 8 / 139 A8  |
| 54     | 3001030113 | 8904365508923 |                                                                                               |          | 18.4-30*      |                                                                                                                   | 8 / 139 A8  |
| 55     | 3001030032 | 8904365501535 |                                                                                               |          | 18.4-30       |                                                                                                                   | 14 / 152 A8 |
| 56     | 3001030068 | 8904365504802 |                                                                                               |          | 18.4-30       |                                                                                                                   | 16 / 154 A8 |

The size marked in \* is TL

| Sr. No | SKU Code   | EAN Number    | Application                                                                       | Rim Dia. | Tire Size | Pattern                                                                                                                 | PR / LISI   |
|--------|------------|---------------|-----------------------------------------------------------------------------------|----------|-----------|-------------------------------------------------------------------------------------------------------------------------|-------------|
| 57     | 3001030031 | 8904365500545 |  | 32       | 8.3-32    | <br><b>TDB 120</b><br>(TT/TL)<br>R-1 | 8 / 107 A8  |
| 58     | 3001030122 | 8904365509364 |                                                                                   |          | 8.3-32 HD |                                                                                                                         | 8 / 107 A8  |
| 59     | 3001030054 | 8904365502761 |                                                                                   |          | 9.5-32    |                                                                                                                         | 6 / 106 A8  |
| 60     | 3001030005 | 8904365500163 |                                                                                   |          | 12.4-32   |                                                                                                                         | 8 / 125 A8  |
| 61     | 3001030017 | 8904365500262 |                                                                                   | 34       | 16.9-34   |                                                                                                                         | 8 / 139 A8  |
| 62     | 3001030111 | 8904365508930 |                                                                                   |          | 16.9-34*  |                                                                                                                         | 8 / 139 A8  |
| 63     | 3001030129 | 8904365509661 |                                                                                   |          | 16.9-34*  |                                                                                                                         | 12 / 144 A8 |
| 64     | 3001030130 | 8904365509678 |                                                                                   |          | 16.9-34   |                                                                                                                         | 14 / 149 A8 |
| 65     | 3001030020 | 8904365500293 |                                                                                   |          | 18.4-34   |                                                                                                                         | 8 / 142 A8  |
| 66     | 3001030114 | 8904365508947 |                                                                                   |          | 18.4-34*  |                                                                                                                         | 8 / 142 A8  |
| 67     | 3001030037 | 8904365501948 |                                                                                   |          | 18.4-34   |                                                                                                                         | 14 / 153 A8 |
| 68     | 3001030006 | 8904365500194 |                                                                                   | 36       | 12.4-36   |                                                                                                                         | 8 / 126 A8  |
| 69     | 3001030088 | 8904365506455 |                                                                                   |          | 12.4-36   |                                                                                                                         | 14 / 139 A8 |
| 70     | 3001030008 | 8904365500224 |                                                                                   |          | 13.6-36   |                                                                                                                         | 8 / 129 A8  |
| 71     | 3001030069 | 8904365504819 |                                                                                   |          | 13.6-36   |                                                                                                                         | 12 / 138 A8 |
| 72     | 3001030089 | 8904365506462 |                                                                                   |          | 13.6-36   |                                                                                                                         | 14 / 142 A8 |
| 73     | 3001030047 | 8904365502358 |                                                                                   | 38       | 13.6-38   |                                                                                                                         | 8 / 131 A8  |
| 74     | 3001030116 | 8904365508954 |                                                                                   |          | 13.6-38*  |                                                                                                                         | 8 / 131 A8  |
| 75     | 3001030070 | 8904365504826 |                                                                                   |          | 13.6-38   |                                                                                                                         | 10 / 136 A8 |
| 76     | 3001030090 | 8904365506479 |                                                                                   |          | 13.6-38   |                                                                                                                         | 14 / 138 A8 |
| 77     | 3001030022 | 8904365500255 |                                                                                   |          | 15.5-38   |                                                                                                                         | 8 / 133 A8  |
| 78     | 3001030115 | 8904365508961 |                                                                                   |          | 15.5-38*  |                                                                                                                         | 8 / 133 A8  |
| 79     | 3001030084 | 8904365506004 |                                                                                   |          | 15.5-38   |                                                                                                                         | 10 / 138 A6 |
| 80     | 3001030085 | 8904365506011 |                                                                                   |          | 15.5-38   |                                                                                                                         | 12 / 141 A6 |
| 81     | 3001030018 | 8904365500286 |                                                                                   |          | 16.9-38   |                                                                                                                         | 8 / 141 A8  |
| 82     | 3001030112 | 8904365508978 |                                                                                   |          | 16.9-38*  |                                                                                                                         | 8 / 141 A8  |
| 83     | 3001030071 | 8904365504833 |                                                                                   |          | 16.9-38   |                                                                                                                         | 14 / 151 A8 |
| 84     | 3001030021 | 8904365500309 |                                                                                   |          | 18.4-38   |                                                                                                                         | 8 / 143 A8  |
| 85     | 3001030046 | 8904365502167 |                                                                                   |          | 18.4-38*  |                                                                                                                         | 8 / 143 A8  |
| 86     | 3001030072 | 8904365504840 |                                                                                   |          | 18.4-38   |                                                                                                                         | 14 / 155 A8 |

The size marked in \* is TL

| Sr. No | SKU Code   | EAN Number    | Application                                                                         | Rim Dia. | Tire Size | Pattern                                                                                                                     | PR / LISI        |
|--------|------------|---------------|-------------------------------------------------------------------------------------|----------|-----------|-----------------------------------------------------------------------------------------------------------------------------|------------------|
| 1      | 3001030063 | 8904365505298 |  | 12       | 5-12      | <br><b>TDB 121</b><br>(TT/TL)<br>R-1W+ | 6 / 64A6/60A8    |
| 2      | 3001030064 | 8904365505304 |                                                                                     |          | 6-12      |                                                                                                                             | 6 / 71A6/67A8    |
| 3      | 3001030062 | 8904365505311 |                                                                                     | 14       | 6-14*     |                                                                                                                             | 4 / 66A6/63A8    |
| 4      | 3001030075 | 8904365505328 |                                                                                     | 18       | 9.5-18    |                                                                                                                             | 8 / 105A6/101A8  |
| 5      | 3001030074 | 8904365505335 |                                                                                     | 20       | 8.3-20    |                                                                                                                             | 8 / 101A6/98A8   |
| 6      | 3001030076 | 8904365505342 |                                                                                     |          | 9.5-20    |                                                                                                                             | 8 / 107A6/103A8  |
| 7      | 3001030077 | 8904365505359 |                                                                                     | 24       | 9.5-24    |                                                                                                                             | 8 / 111A6/108A8  |
| 8      | 3001030078 | 8904365505366 |                                                                                     |          | 12.4-24   |                                                                                                                             | 8 / 120A6/117A8  |
| 9      | 3001030083 | 8904365505373 |                                                                                     | 26       | 13.6-26   |                                                                                                                             | 8 / 126A6/123A8  |
| 10     | 3001030079 | 8904365505380 |                                                                                     | 28       | 12.4-28   |                                                                                                                             | 12 / 131A6/127A8 |
| 11     | 3001030080 | 8904365505397 |                                                                                     |          | 13.6-28   |                                                                                                                             | 12 / 134A6/130A8 |
| 12     | 3001030081 | 8904365505403 |                                                                                     |          | 14.9-28   |                                                                                                                             | 12 / 137A6/133A8 |
| 13     | 3001030082 | 8904365505410 |                                                                                     |          | 16.9-28   |                                                                                                                             | 12 / 143A6/139A8 |

The size marked in \* is TL

| Sr. No | SKU Code   | EAN Number    | Application                                                                         | Rim Dia. | Tire Size | Pattern                                                                                                                | PR / LISI   |
|--------|------------|---------------|-------------------------------------------------------------------------------------|----------|-----------|------------------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3001030049 | 8904365502532 |  | 26       | 23.1-26*  | <br><b>TDB 123</b><br>(TT/TL) R-1 | 12 / 153 A8 |
| 2      | 3001030024 | 8904365500521 |                                                                                     |          | 23.1-26   |                                                                                                                        | 16 / 159 A8 |
| 3      | 3001030044 | 8904365502129 |                                                                                     |          | 23.1-26*  |                                                                                                                        | 16 / 159 A8 |
| 4      | 3001030048 | 8904365502310 |                                                                                     | 38       | 20.8-38   |                                                                                                                        | 8 / 148 A8  |
| 5      | 3001030091 | 8904365506578 |                                                                                     |          | 20.8-38   |                                                                                                                        | 14 / 159 A8 |
| 6      | 3001030131 | 8904365514573 |                                                                                     |          | 20.8-38   |                                                                                                                        | 14 / 159A8  |

The size marked in \* is TL

| Sr. No | SKU Code   | EAN Number    | Application                                                                                  | Rim Dia. | Tire Size | Pattern                                                                                                    | PR / LISI   |
|--------|------------|---------------|----------------------------------------------------------------------------------------------|----------|-----------|------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3001030061 | 8904365504208 | Tractor<br> | 32       | 24.5-32   | <br>TDB 124<br>(TL) R-1 | 12 / 159 A6 |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                  | Rim Dia. | Tire Size | Pattern                                                                                                    | PR / LISI             |
|--------|------------|---------------|----------------------------------------------------------------------------------------------|----------|-----------|------------------------------------------------------------------------------------------------------------|-----------------------|
| 1      | 3001030132 | 8904365514887 | Tractor<br> | 24       | 12.4-24   | <br>TDB 125<br>(TL) R-2 | 8 117 A8 /<br>121 A6  |
| 2      | 3001030133 | 8904365514894 |                                                                                              |          | 13.6-24   |                                                                                                            | 8 120 A8 /<br>123 A6  |
| 3      | 3001030134 | 8904365515167 |                                                                                              |          | 14.9-24   |                                                                                                            | 8 124 A8 /<br>128 A6  |
| 4      | 3001030135 | 8904365515174 |                                                                                              | 26       | 23.1-26   |                                                                                                            | 14 152 A8 /<br>156 A6 |
| 5      | 3001030136 | 8904365515181 |                                                                                              | 30       | 18.4-30   |                                                                                                            | 12 145 A8 /<br>149 A6 |
| 6      | 3001030138 | 8904365515198 |                                                                                              | 34       | 23.1-34   |                                                                                                            | 14 156 A8 /<br>160 A6 |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size | Pattern                                                                                                        | PR / LISI   |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|-----------|----------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3001030025 | 8904365504963 | Tractor<br> | 28       | 12.4-28   | <br>BOSS TD 15<br>(TT) R-1 | 12 / 125 A6 |
| 2      | 3001030026 | 8904365504970 |                                                                                                |          | 13.6-28   |                                                                                                                | 12 / 128 A6 |
| 3      | 3001030027 | 8904365504987 |                                                                                                |          | 14.9-28   |                                                                                                                | 12 / 134 A6 |
| 4      | 3001030028 | 8904365504994 |                                                                                                |          | 16.9-28   |                                                                                                                | 12 / 143 A6 |
| 5      | 3001030029 | 8904365501528 |                                                                                                | 30       | 18.4-30   |                                                                                                                | 14 / 152 A8 |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size | Pattern                                                                                                         | PR / LISI   |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|-----------|-----------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3001030124 | 8904365514436 | Tractor<br> | 24       | 9.5-24    | <br>BOSS TD 16<br>(TT) R-1 | 12 / 114 A6 |
| 2      | 3001030094 | 8904365508251 |                                                                                                | 28       | 13.6-28   |                                                                                                                 | 12 / 128 A6 |
| 3      | 3001030128 | 8904365508268 |                                                                                                |          | 14.9-28   |                                                                                                                 | 12 / 134 A6 |
| 4      | 3001030125 | 8904365509715 |                                                                                                |          | 16.9-28   |                                                                                                                 | 12 / 143 A6 |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size         | Pattern                                                                                                          | PR / LISI |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|-------------------|------------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001040049 | 8904365502440 | Tractor<br> | 28       | 600/65R28         | <br>XLR 880<br>(TL)<br>R-1W | 154 D     |
| 2      | 3001040118 | 8904365502624 |                                                                                                |          | 600/70R28         |                                                                                                                  | 161 D     |
| 3      | 3001040037 | 8904365502457 |                                                                                                | 30       | 600/70R30         |                                                                                                                  | 152 D     |
| 4      | 3001040154 | 8904365504710 |                                                                                                | 34       | 600/70R34         |                                                                                                                  | 160 D     |
| 5      | 3001040179 | 8904365507650 |                                                                                                | 38       | 650/75R38         |                                                                                                                  | 169D      |
| 6      | 3001040038 | 8904365502396 |                                                                                                |          | 710/70R38         |                                                                                                                  | 172 D     |
| 7      | 3001040111 | 8904365502402 |                                                                                                |          | 710/70R38         |                                                                                                                  | 178 D     |
| 8      | 3001040121 | 8904365502655 |                                                                                                |          | 800/70R38         |                                                                                                                  | 178 D     |
| 9      | 3001040120 | 8904365502648 |                                                                                                |          | 650/85R38         |                                                                                                                  | 173 D     |
| 10     | 3001040183 | 8904365507797 |                                                                                                |          | 650/85R38 SB & SG |                                                                                                                  | 173 D     |
| 11     | 3001040119 | 8904365502631 |                                                                                                | 42       | 620/70R42         |                                                                                                                  | 166 D     |
| 12     | 3001040112 | 8904365502464 |                                                                                                |          | 710/70R42         |                                                                                                                  | 173 D     |
| 13     | 3001040182 | 8904365507766 |                                                                                                |          | 710/70R42 SB      |                                                                                                                  | 173 D     |
| 14     | 3001040126 | 8904365502969 |                                                                                                |          | 710/75R42         |                                                                                                                  | 175 D     |
| 15     | 3001040219 | 8904365509494 |                                                                                                | 46       | 620/70R46         |                                                                                                                  | 167 D     |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                  | Rim Dia. | Tire Size    | Pattern                                                                                                        | PR / LISI |
|--------|--------------|---------------|----------------------------------------------------------------------------------------------|----------|--------------|----------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001040157   | 8904365505830 | Tractor<br> | 20       | 420/65R20    | <br>TDR 650<br>(TL)<br>R-1W | 135 D     |
| 2      | 3001040156   | 8904365505847 |                                                                                              |          | 440/65R20    |                                                                                                                | 138 D     |
| 3      | 3001040040   | 8904365502808 |                                                                                              | 24       | 440/65R24    |                                                                                                                | 135 D     |
| 4      | 3001040041   | 8904365502273 |                                                                                              |          | 480/65R24    |                                                                                                                | 140 D     |
| 5      | 3001040042   | 8904365502259 |                                                                                              |          | 540/65R24    |                                                                                                                | 146 D     |
| 6      | 3001040249DF | 8904365514818 |                                                                                              | 26       | 540/65R26    |                                                                                                                | 141 D     |
| 7      | 3001040155   | 8904365505281 |                                                                                              | 28       | 440/65R28    |                                                                                                                | 138 D     |
| 8      | 3001040043   | 8904365502266 |                                                                                              |          | 480/65R28    |                                                                                                                | 142 D     |
| 9      | 3001040044   | 8904365502242 |                                                                                              |          | 540/65R28    |                                                                                                                | 149 D     |
| 10     | 3001040251DF | 8904365514924 |                                                                                              | 30       | 540/65R28    |                                                                                                                | 154 D     |
| 11     | 3001040045   | 8904365502235 |                                                                                              |          | 540/65R30    |                                                                                                                | 150 D     |
| 12     | 3001040046   | 8904365502228 |                                                                                              | 34       | 540/65R34    |                                                                                                                | 152 D     |
| 13     | 3001040047   | 8904365502297 |                                                                                              |          | 600/65R34    |                                                                                                                | 157 D     |
| 14     | 3001040048   | 8904365502303 |                                                                                              | 38       | 540/65R38    |                                                                                                                | 153 D     |
| 15     | 3001040050   | 8904365502280 |                                                                                              |          | 600/65R38    |                                                                                                                | 159 D     |
| 16     | 3001040108   | 8904365502365 |                                                                                              |          | 650/65R38    |                                                                                                                | 163 D     |
| 17     | 3001040169   | 8904365504758 |                                                                                              |          | 650/65R38 SB |                                                                                                                | 171 D     |
| 18     | 3001040109   | 8904365502372 |                                                                                              | 42       | 650/65R42    |                                                                                                                | 165 D     |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size           | Pattern                                                                                                          | PR / LISI |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|---------------------|------------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001040127 | 8904365503355 | Tractor<br> | 20       | 360/70R20           | <br>TDR 700<br>(TL)<br>R-1W | 129 D     |
| 2      | 3001040128 | 8904365503362 |                                                                                                |          | 380/70R20           |                                                                                                                  | 122 D     |
| 3      | 3001040061 | 8904365501733 |                                                                                                | 24       | 320/70R24           |                                                                                                                  | 116 D     |
| 4      | 3001040062 | 8904365501726 |                                                                                                |          | 360/70R24           |                                                                                                                  | 122 D     |
| 5      | 3001040063 | 8904365501702 |                                                                                                |          | 380/70R24           |                                                                                                                  | 125 D     |
| 6      | 3001040064 | 8904365501740 |                                                                                                |          | 420/70R24           |                                                                                                                  | 130 D     |
| 7      | 3001040180 | 8904365507773 |                                                                                                |          | 420/70R24 SB SG     |                                                                                                                  | 130 D     |
| 8      | 3001040065 | 8904365501665 |                                                                                                | 28       | 480/70R24           |                                                                                                                  | 138 D     |
| 9      | 3001040066 | 8904365501719 |                                                                                                |          | 360/70R28           |                                                                                                                  | 125 D     |
| 10     | 3001040067 | 8904365501696 |                                                                                                |          | 380/70R28           |                                                                                                                  | 127 D     |
| 11     | 3001040068 | 8904365501689 |                                                                                                |          | 420/70R28           |                                                                                                                  | 133 D     |
| 12     | 3001040069 | 8904365501658 |                                                                                                | 30       | 480/70R28           |                                                                                                                  | 140 D     |
| 13     | 3001040070 | 8904365501672 |                                                                                                |          | 420/70R30           |                                                                                                                  | 134 D     |
| 14     | 3001040071 | 8904365501641 |                                                                                                |          | 480/70R30           |                                                                                                                  | 141 D     |
| 15     | 3001040072 | 8904365501634 |                                                                                                | 34       | 480/70R34           |                                                                                                                  | 143 D     |
| 16     | 3001040151 | 8904365504390 |                                                                                                |          | 480/70R34 SB SG     |                                                                                                                  | 157 D     |
| 17     | 3001040073 | 8904365501610 |                                                                                                |          | 520/70R34           |                                                                                                                  | 148 D     |
| 18     | 3001040218 | 8904365509487 |                                                                                                | 38       | 400/75R38 (15.5R38) |                                                                                                                  | 138D      |
| 19     | 3001040074 | 8904365501627 |                                                                                                |          | 480/70R38           |                                                                                                                  | 145 D     |
| 20     | 3001040075 | 8904365501764 |                                                                                                |          | 520/70R38           |                                                                                                                  | 150 D     |
| 21     | 3001040076 | 8904365501757 |                                                                                                |          | 580/70R38           |                                                                                                                  | 155 D     |
| 22     | 3001040106 | 8904365501924 |                                                                                                |          | 580/70R38 SB        |                                                                                                                  | 180 D     |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size                 | Pattern                                                                                                          | PR / LISI |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|---------------------------|------------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001040125 | 8904365502860 | Tractor<br> | 38       | 380/80R38 (14.9R38)       | <br>TDR 800<br>(TL)<br>R-1W | 142 D     |
| 2      | 3001040152 | 8904365504406 |                                                                                                |          | 380/80R38 (14.9R38) SB SG |                                                                                                                  | 152 D     |
| 3      | 3001040220 | 8904365509463 |                                                                                                | 46       | 420/80R46 (16.9R46)       |                                                                                                                  | 159 D     |
| 4      | 3001040107 | 8904365502198 |                                                                                                | 42       | 480/80R42 (18.4R42)       |                                                                                                                  | 156 D     |
| 5      | 3001040079 | 8904365502204 |                                                                                                | 46       | 480/80R46 (18.4R46)       |                                                                                                                  | 158 D     |
| 6      | 3001040080 | 8904365502211 |                                                                                                | 50       | 480/80R50 (18.4R50)       |                                                                                                                  | 159 D     |
| 7      | 3001040117 | 8904365502495 |                                                                                                |          | 480/80R50 (18.4R50)       |                                                                                                                  | 165 D     |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                   | Rim Dia. | Tire Size                 | Pattern                                                                                                         | PR / LISI |
|--------|--------------|---------------|-----------------------------------------------------------------------------------------------|----------|---------------------------|-----------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001040174   | 8904365506912 | Tractor<br> | 20       | 250/85R20 (9.5R20)        | <br>TDR 850<br>(TL)<br>R-1W | 116D      |
| 2      | 3001040129   | 8904365503386 |                                                                                               |          | 280/85R20 (11.2R20)       |                                                                                                                 | 116 D     |
| 3      | 3001040130   | 8904365503393 |                                                                                               |          | 320/85R20 (12.4R20)       |                                                                                                                 | 119 D     |
| 4      | 3001040122   | 8904365502938 |                                                                                               | 24       | 250/85R24 (9.5R24)        |                                                                                                                 | 109 D     |
| 5      | 3001040081   | 8904365501115 |                                                                                               |          | 280/85R24 (11.2R24)       |                                                                                                                 | 115 D     |
| 6      | 3001040227   | 8904365509319 |                                                                                               |          | 280/85R24 (11.2R24) SB    |                                                                                                                 | 130D      |
| 7      | 3001040083   | 8904365501139 |                                                                                               |          | 320/85R24 (12.4R24)       |                                                                                                                 | 122 D     |
| 8      | 3001040087   | 8904365501153 |                                                                                               |          | 340/85R24 (13.6R24)       |                                                                                                                 | 125 D     |
| 9      | 3001040090   | 8904365501177 |                                                                                               |          | 380/85R24 (14.9R24)       |                                                                                                                 | 131 D     |
| 10     | 3001040092   | 8904365501184 |                                                                                               |          | 420/85R24 (16.9R24)       |                                                                                                                 | 137 D     |
| 11     | 3001040239   | 8904365514641 |                                                                                               | 26       | 420/85R26 (16.9R26)       |                                                                                                                 | 143 D     |
| 12     | 3001040318DF | 8904365514900 |                                                                                               | 28       | 250/85R28 (9.5R28)        |                                                                                                                 | 112 D     |
| 13     | 3001040082   | 8904365501122 |                                                                                               |          | 280/85R28 (11.2R28)       |                                                                                                                 | 118 D     |
| 14     | 3001040084   | 8904365501146 |                                                                                               |          | 320/85R28 (12.4R28)       |                                                                                                                 | 124 D     |
| 15     | 3001040088   | 8904365501160 |                                                                                               |          | 340/85R28 (13.6R28)       |                                                                                                                 | 127 D     |
| 16     | 3001040091   | 8904365501382 |                                                                                               |          | 380/85R28 (14.9R28)       |                                                                                                                 | 133 D     |
| 17     | 3001040215   | 8904365508664 |                                                                                               |          | 380/85R28                 |                                                                                                                 | 141 D     |
| 18     | 3001040093   | 8904365501207 |                                                                                               |          | 420/85R28 (16.9R28)       |                                                                                                                 | 139 D     |
| 19     | 3001040113   | 8904365502426 |                                                                                               | 30       | 380/85R30 (14.9R30)       |                                                                                                                 | 135 D     |
| 20     | 3001040094   | 8904365501214 |                                                                                               |          | 420/85R30 (16.9R30)       |                                                                                                                 | 140 D     |
| 21     | 3001040097   | 8904365501245 |                                                                                               |          | 460/85R30 (18.4R30)       |                                                                                                                 | 145 D     |
| 22     | 3001040085   | 8904365501399 |                                                                                               | 32       | 320/85R32 (12.4R32)       |                                                                                                                 | 126 D     |
| 23     | 3001040005   | 8904365505779 |                                                                                               |          | 320/85R32 (12.4R32) SB    |                                                                                                                 | 145 D     |
| 24     | 3001040114   | 8904365502433 |                                                                                               | 34       | 380/85R34 (14.9R34)       |                                                                                                                 | 137 D     |
| 25     | 3001040095   | 8904365501221 |                                                                                               |          | 420/85R34 (16.9R34)       |                                                                                                                 | 142 D     |
| 26     | 3001040153   | 8904365504413 |                                                                                               |          | 420/85R34 (16.9R34) SB SG |                                                                                                                 | 152 D     |
| 27     | 3001040098   | 8904365501252 |                                                                                               | 36       | 460/85R34 (18.4R34)       |                                                                                                                 | 147 D     |
| 28     | 3001040086   | 8904365501405 |                                                                                               |          | 320/85R36 (12.4R36)       |                                                                                                                 | 128 D     |
| 29     | 3001040148   | 8904365503195 |                                                                                               |          | 320/85R36 (12.4R36)       |                                                                                                                 | 148 D     |
| 30     | 3001040089   | 8904365501412 |                                                                                               |          | 340/85R36 (13.6R36)       |                                                                                                                 | 132 D     |
| 31     | 3001040124   | 8904365502952 |                                                                                               | 38       | 320/85R38 (12.4R38)       |                                                                                                                 | 143 D     |
| 32     | 3001040123   | 8904365502945 |                                                                                               |          | 340/85R38 (13.6R38)       |                                                                                                                 | 133 D     |
| 33     | 3001040096   | 8904365501238 |                                                                                               |          | 420/85R38 (16.9R38)       |                                                                                                                 | 144 D     |
| 34     | 3001040099   | 8904365501269 |                                                                                               |          | 460/85R38 (18.4R38)       |                                                                                                                 | 149 D     |
| 35     | 3001040181   | 8904365507780 |                                                                                               |          | 460/85R38 (18.4R38) SB SG |                                                                                                                 | 149 D     |
| 36     | 3001040250   | 8904365514658 |                                                                                               |          | 460/85R38 (18.4R38) SB    |                                                                                                                 | 167 D     |
| 37     | 3001040101   | 8904365501191 |                                                                                               | 42       | 520/85R38 (20.8R38)       |                                                                                                                 | 155 D     |
| 38     | 3001040103   | 8904365501429 |                                                                                               |          | 520/85R42 (20.8R42)       |                                                                                                                 | 157 D     |
| 39     | 3001040115   | 8904365502471 |                                                                                               |          | 520/85R42 (20.8R42)       |                                                                                                                 | 165 D     |
| 40     | 3001040216   | 8904365508671 |                                                                                               | 46       | 520/85R42                 |                                                                                                                 | 169 D     |
| 41     | 3001040105   | 8904365501436 |                                                                                               |          | 520/85R46 (20.8R46)       |                                                                                                                 | 158 D     |
| 42     | 3001040116   | 8904365502488 |                                                                                               |          | 520/85R46 (20.8R46)       |                                                                                                                 | 169 D     |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size           | Pattern                                                                                                           | PR / LISI |
|--------|--------------|---------------|------------------------------------------------------------------------------------------------|----------|---------------------|-------------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001040198   | 8904365509135 | Tractor<br> | 28       | VF 600/60R28 NRO SB | <br>VDR 2000<br>(TL)<br>R-1W | 160D      |
| 2      | 3001040194   | 8904365508756 |                                                                                                |          | VF 600/65R28 NRO SB |                                                                                                                   | 163 D     |
| 3      | 3001040208   | 8904365508763 |                                                                                                |          | VF 600/65R28 CFO SB |                                                                                                                   | 166 A8    |
| 4      | 3001040200   | 8904365509920 |                                                                                                | 30       | VF 540/65R30 NRO SB |                                                                                                                   | 161 D     |
| 5      | 3001040210   | 8904365509142 |                                                                                                |          | VF 540/65R30 CFO SB |                                                                                                                   | 161 A8    |
| 6      | 3001040193   | 8904365508749 |                                                                                                |          | VF 600/60R30 NRO SB |                                                                                                                   | 162 D     |
| 7      | 3001040231   | 8904365509586 |                                                                                                |          | VF 600/65R30 NRO SB |                                                                                                                   | 161 D     |
| 8      | 3001040197   | 8904365508794 |                                                                                                |          | VF 600/70R30 NRO SB |                                                                                                                   | 170 D     |
| 9      | 3001040317DF | 8904365515280 |                                                                                                |          | VF 710/55R30 NRO SB |                                                                                                                   | 165 D     |



| Sr. No | SKU Code     | EAN Number    | Application                                                                                         | Rim Dia. | Tire Size              | Pattern                                                                                                                | PR / LISI |
|--------|--------------|---------------|-----------------------------------------------------------------------------------------------------|----------|------------------------|------------------------------------------------------------------------------------------------------------------------|-----------|
| 10     | 3001040232   | 8904365509937 | <b>Tractor</b><br> | 34       | VF 380/85R34 SB        | <br><b>VDR 2000</b><br>(TL)<br>R-1W | 149 D     |
| 11     | 3001040203   | 8904365509517 |                                                                                                     |          | VF 420/85R34 SB        |                                                                                                                        | 159 D     |
| 12     | 3001040223   | 8904365509562 |                                                                                                     |          | VF 600/60R34 SB        |                                                                                                                        | 160 D     |
| 13     | 3001040230   | 8904365509593 |                                                                                                     |          | VF 600/70R34 NRO SB    |                                                                                                                        | 170 D     |
| 14     | 3001040221   | 8904365509548 |                                                                                                     |          | VF 650/60R34 NRO SB    |                                                                                                                        | 168 D     |
| 15     | 3001040222   | 8904365509555 |                                                                                                     |          | VF 650/65R34 NRO SB    |                                                                                                                        | 170 D     |
| 16     | 3001040224   | 8904365509579 |                                                                                                     |          | VF 710/60R34 NRO SB    |                                                                                                                        | 173 D     |
| 17     | 3001040205   | 8904365509036 |                                                                                                     | 38       | VF 380/80R38 SB        |                                                                                                                        | 167 D     |
| 18     | 3001040204   | 8904365509159 |                                                                                                     |          | VF 380/95R38 NRO SB    |                                                                                                                        | 159D      |
| 19     | 3001040233   | 8904365509951 |                                                                                                     |          | VF 420/85R38 SB        |                                                                                                                        | 155 D     |
| 20     | 3001040195   | 8904365508770 |                                                                                                     |          | VF 650/65R38 SB        |                                                                                                                        | 180 D     |
| 21     | 3001040331DF | 8904365515297 |                                                                                                     |          | VF 650/85R38 (SB)      |                                                                                                                        | 182 D     |
| 22     | 3001040190   | 8904365508725 |                                                                                                     |          | VF 710/60R38 NRO SB    |                                                                                                                        | 174 D     |
| 23     | 3001040211   | 8904365509166 |                                                                                                     |          | VF 710/70R38 NRO SB    |                                                                                                                        | 181D      |
| 24     | 3001040212   | 8904365509173 |                                                                                                     |          | VF 710/70R38 CFO SB    |                                                                                                                        | 183A8     |
| 25     | 3001040192   | 8904365508183 |                                                                                                     |          | VF 800/70R38 NRO SB SG |                                                                                                                        | 187D      |
| 26     | 3001040209   | 8904365508718 |                                                                                                     |          | VF 800/70R38 CFO SB    |                                                                                                                        | 190 A8    |
| 27     | 3001040196   | 8904365508787 |                                                                                                     | 42       | VF 650/65R42 NRO SB    |                                                                                                                        | 174 D     |
| 28     | 3001040191   | 8904365508732 |                                                                                                     |          | VF 710/60R42 NRO SB    |                                                                                                                        | 176 D     |
| 29     | 3001040213   | 8904365509180 |                                                                                                     |          | VF 710/70R42 NRO SB    |                                                                                                                        | 185D      |
| 30     | 3001040214   | 8904365509197 |                                                                                                     |          | VF 710/70R42 CFO SB    |                                                                                                                        | 190A8     |
| 31     | 3001040234   | 8904365509944 |                                                                                                     |          | VF 900/60R42 NRO SB    |                                                                                                                        | 189 D     |
| 32     | 3001040225   | 8904365509531 |                                                                                                     | 44       | VF 750/70R44 SB        |                                                                                                                        | 186 D     |
| 33     | 3001040206   | 8904365509203 |                                                                                                     | 46       | VF380/85R46 NRO SB     |                                                                                                                        | 162D      |
| 34     | 3001040202   | 8904365509210 |                                                                                                     |          | VF 480/80R46 SB        |                                                                                                                        | 177D      |
| 35     | 3001040201   | 8904365509524 |                                                                                                     | 54       | VF 480/95R54 NRO SB    |                                                                                                                        | 180 D     |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                           | Rim Dia. | Tire Size | Pattern                                                                                                                | PR / LISI |
|--------|------------|---------------|-------------------------------------------------------------------------------------------------------|----------|-----------|------------------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001160001 | 8904365503270 | <b>Tractor</b><br> | 16       | 240/70R16 | <br><b>CDR 700</b><br>(TL)<br>R-1 | 104 D     |
| 2      | 3001160002 | 8904365503287 |                                                                                                       |          | 260/70R16 |                                                                                                                        | 109 D     |
| 3      | 3001160004 | 8904365503300 |                                                                                                       |          | 280/70R16 |                                                                                                                        | 112 D     |
| 4      | 3001160010 | 8904365514597 |                                                                                                       |          | 320/65R16 |                                                                                                                        | 117 D     |
| 5      | 3001160005 | 8904365503317 |                                                                                                       | 18       | 280/70R18 |                                                                                                                        | 114 D     |
| 6      | 3001160011 | 8904365514603 |                                                                                                       |          | 320/65R18 |                                                                                                                        | 109 D     |
| 7      | 3001160009 | 8904365503379 |                                                                                                       |          | 340/65R18 |                                                                                                                        | 113 D     |
| 8      | 3001160003 | 8904365503294 |                                                                                                       | 20       | 260/70R20 |                                                                                                                        | 113 D     |
| 9      | 3001160006 | 8904365503324 |                                                                                                       |          | 280/70R20 |                                                                                                                        | 116 D     |
| 10     | 3001160007 | 8904365503331 |                                                                                                       |          | 300/70R20 |                                                                                                                        | 120 D     |
| 11     | 3001160008 | 8904365503348 |                                                                                                       |          | 320/70R20 |                                                                                                                        | 123 D     |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                                   | Rim Dia. | Tire Size            | Pattern                                                                                                                 | PR / LISI |
|--------|--------------|---------------|---------------------------------------------------------------------------------------------------------------|----------|----------------------|-------------------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001040168   | 8904365506127 | <b>Tractor Sprayer</b><br> | 42       | VF 580/85R42 SB      | <br><b>VDR 900</b><br>(TL)<br>R-1W | 183 D     |
| 2      | 3001040158   | 8904365505786 |                                                                                                               | 46       | VF 380/90R46 SB      |                                                                                                                         | 173 D     |
| 3      | 3001040167   | 8904365506134 |                                                                                                               |          | VF 520/85R46 SB      |                                                                                                                         | 173 D     |
| 4      | 3001040176   | 8904365506387 |                                                                                                               | 50       | VF 320/90R50 SB      |                                                                                                                         | 169 D     |
| 5      | 3001040177   | 8904365506394 |                                                                                                               |          | VF 380/90R50 SB      |                                                                                                                         | 175 D     |
| 6      | 3001040184   | 8904365508237 |                                                                                                               |          | VF 380/105R50 SB     |                                                                                                                         | 179D      |
| 7      | 3001040160   | 8904365507667 |                                                                                                               |          | VF 420/95R50 SB      |                                                                                                                         | 177 D     |
| 8      | 3001040162   | 8904365506141 |                                                                                                               |          | VF 480/80R50 SB      |                                                                                                                         | 179 D     |
| 9      | 3001040164   | 8904365507674 |                                                                                                               |          | VF 480/95R50 SB      |                                                                                                                         | 176 D     |
| 10     | 3001040246DF | 8904365515303 |                                                                                                               | 54       | VF 250/115R54 (SB) # |                                                                                                                         | 151 D     |
| 11     | 3001040165   | 8904365505243 |                                                                                                               |          | VF 320/90R54 SB      |                                                                                                                         | 168 D     |
| 12     | 3001040238DF | 8904365514825 |                                                                                                               |          | VF 380/90R54         |                                                                                                                         | 176 D     |
| 13     | 3001040166   | 8904365507681 |                                                                                                               |          | VF 380/105R54 SB     |                                                                                                                         | 180 D     |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                         | Rim Dia. | Tire Size              | Pattern                                                                                                              | PR / LISI    |
|--------|--------------|---------------|-----------------------------------------------------------------------------------------------------|----------|------------------------|----------------------------------------------------------------------------------------------------------------------|--------------|
| 1      | 3001040235   | 8904365509906 | <b>Tractor</b><br> | 24       | 210/90R24 (8.3R24)     | <br><b>TDR 900</b><br>(TL)<br>R-1 | 107 A8/B     |
| 2      | 3001040236   | 8904365509913 |                                                                                                     | 28       | 210/95R28 (8.3R28)     |                                                                                                                      | 116 A8/B     |
| 3      | 3001040175   | 8904365506370 |                                                                                                     | 30       | 420/90R30              |                                                                                                                      | 147A8/B      |
| 4      | 3001040207   | 8904365508275 |                                                                                                     | 32       | 210/95R32 (8.3R32)     |                                                                                                                      | 116D/119A8   |
| 5      | 3001040131   | 8904365503430 |                                                                                                     |          | 230/95R32 (9.5R32)     |                                                                                                                      | 128 D        |
| 6      | 3001040133   | 8904365503447 |                                                                                                     |          | 270/95R32 (11.2R32)    |                                                                                                                      | 136 D        |
| 7      | 3001040185   | 8904365508152 |                                                                                                     | 34       | 320/85R34 (12.4R34)    |                                                                                                                      | 141D         |
| 8      | 3001040132   | 8904365503508 |                                                                                                     | 36       | 230/95R36 (9.5R36)     |                                                                                                                      | 130 D        |
| 9      | 3001040134   | 8904365503515 |                                                                                                     |          | 270/95R36 (11.2R36)    |                                                                                                                      | 139D         |
| 10     | 3001040135   | 8904365503522 |                                                                                                     | 38       | 270/95R38 (11.2R38)    |                                                                                                                      | 140 D        |
| 11     | 3001040171   | 8904365506899 |                                                                                                     |          | 380/95R38              |                                                                                                                      | 150A8/147D   |
| 12     | 3001040186   | 8904365508190 |                                                                                                     | 40       | 230/95R40 (9.5R40)     |                                                                                                                      | 132 D/135 A8 |
| 13     | 3001040247   | 8904365514665 |                                                                                                     | 42       | 230/95R42 (9.5R42)     |                                                                                                                      | 133 D        |
| 14     | 3001040136   | 8904365503539 |                                                                                                     |          | 270/95R42 (11.2R42)    |                                                                                                                      | 139 D        |
| 15     | 3001040187   | 8904365508169 |                                                                                                     |          | 320/80R42 (12.4R42)    |                                                                                                                      | 141 A8/B     |
| 16     | 3001040188   | 8904365508176 |                                                                                                     |          | 320/90R42 (12.4R42)    |                                                                                                                      | 144 D/147 A8 |
| 17     | 3001040248DF | 8904365515273 |                                                                                                     | 44       | 210/95R44 (8.3R44)     |                                                                                                                      | 126 D        |
| 18     | 3001040139   | 8904365503560 |                                                                                                     |          | 230/95R44 (9.5R44)     |                                                                                                                      | 134 D        |
| 19     | 3001040137   | 8904365503546 |                                                                                                     | 46       | 270/95R44 (11.2R44)    |                                                                                                                      | 142 D        |
| 20     | 3001040142   | 8904365503591 |                                                                                                     |          | 300/95R46 (12.4R46)    |                                                                                                                      | 148 D        |
| 21     | 3001040144   | 8904365503614 |                                                                                                     |          | 320/90R46 (12.4R46)    |                                                                                                                      | 148 D        |
| 22     | 3001040217   | 8904365509470 |                                                                                                     |          | 340/85R46 (13.6R46)    |                                                                                                                      | 150 D        |
| 23     | 3001040149   | 8904365504383 |                                                                                                     |          | 380/90R46 (14.9R46) SB |                                                                                                                      | 159 D        |
| 24     | 3001040150   | 8904365504352 |                                                                                                     | 48       | 380/90R46 (14.9R46) SB |                                                                                                                      | 173 D        |
| 25     | 3001040140   | 8904365503577 |                                                                                                     |          | 230/95R48 (9.5R48)     |                                                                                                                      | 136 D        |
| 26     | 3001040138   | 8904365503553 |                                                                                                     |          | 270/95R48 (11.2R48)    |                                                                                                                      | 144 D        |
| 27     | 3001040146   | 8904365503638 |                                                                                                     | 50       | 340/85R48 (13.6R48)    |                                                                                                                      | 151 D        |
| 28     | 3001040145   | 8904365503621 |                                                                                                     |          | 320/90R50 (12.4R50)    |                                                                                                                      | 150 D        |
| 29     | 3001040173   | 8904365506882 |                                                                                                     | 52       | 480/95R50              |                                                                                                                      | 167A8/164D   |
| 30     | 3001040143   | 8904365503607 |                                                                                                     | 54       | 300/95R52 (12.4R52) SB |                                                                                                                      | 156 D        |
| 31     | 3001040141   | 8904365503584 |                                                                                                     |          | 270/95R54 (11.2R54) SB |                                                                                                                      | 156 D        |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                                   | Rim Dia. | Tire Size       | Pattern                                                                                                             | PR / LISI |
|--------|------------|---------------|---------------------------------------------------------------------------------------------------------------|----------|-----------------|---------------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001040170 | 8904365506905 | <b>Tractor Sprayer</b><br> | 46       | VF 380/90R46 SB | <br><b>VDR 901</b><br>(TL) R-1 | 173D      |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                                                                                                                                                                                                                                    | Rim Dia. | Tire Size                  | Pattern                                                                                                                 | PR / LISI  |
|--------|--------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------------------------|-------------------------------------------------------------------------------------------------------------------------|------------|
| 1      | 3002130026   | 8904365507872 | <b>Tractor Telehandler Backhoe loader</b><br><br><br> | 16       | 250/75R16 SB               | <br><b>MDR 1000</b><br>(TL)<br>IND | 120 G      |
| 2      | 3002130023   | 8904365506837 |                                                                                                                                                                                                                                                                                                                | 18       | 340/80R18 (12.5R18) SB     |                                                                                                                         | 143A8/138D |
| 3      | 3002130029   | 8904365514672 |                                                                                                                                                                                                                                                                                                                | 20       | 340/80R20 (12.5R20) SB     |                                                                                                                         | 144A8/140D |
| 4      | 3002130020   | 8904365506820 |                                                                                                                                                                                                                                                                                                                |          | 360/80R20 (13.6R20) SB     |                                                                                                                         | 147A8/143D |
| 5      | 3002130030DF | 8904365514795 |                                                                                                                                                                                                                                                                                                                |          | 400/70R20 (16.0/70R20) SB  |                                                                                                                         | 149A8/144D |
| 6      | 3002130021   | 8904365506868 |                                                                                                                                                                                                                                                                                                                | 24       | 360/80R24 (13.6R24) SB     |                                                                                                                         | 143A8/138D |
| 7      | 3002130031   | 8904365511626 |                                                                                                                                                                                                                                                                                                                |          | 400/70R24 (16.0/70 R24) SB |                                                                                                                         | 152A8/146D |
| 8      | 3002130008   | 8904365506356 |                                                                                                                                                                                                                                                                                                                |          | 400/80R24 (14.9R24) SB     |                                                                                                                         | 149A8/144D |
| 9      | 3002130001   | 8904365506295 |                                                                                                                                                                                                                                                                                                                |          | 440/80R24 (16.9R24) SB     |                                                                                                                         | 154A8/149D |
| 10     | 3002130032   | 8904365514702 |                                                                                                                                                                                                                                                                                                                |          | 460/70R24 (17.5LR24) SB    |                                                                                                                         | 159A8/154D |
| 11     | 3002130033   | 8904365511633 |                                                                                                                                                                                                                                                                                                                |          | 500/70R24 (19.5LR24) SB    |                                                                                                                         | 164A8/159D |
| 12     | 3002130034   | 8904365514696 |                                                                                                                                                                                                                                                                                                                |          | 540/70R24 SB               |                                                                                                                         | 168A8/162D |
| 13     | 3002130035   | 8904365514689 |                                                                                                                                                                                                                                                                                                                | 26       | 480/80R26 (18.4R26) SB     |                                                                                                                         | 160A8/155D |
| 14     | 3002130036DF | 8904365514801 |                                                                                                                                                                                                                                                                                                                |          | 580/70R26 SB               |                                                                                                                         | 158A8/153D |
| 15     | 3002130009   | 8904365506332 |                                                                                                                                                                                                                                                                                                                | 28       | 400/80R28 (14.9R28) SB     |                                                                                                                         | 151A8/146D |
| 16     | 3002130002   | 8904365506301 |                                                                                                                                                                                                                                                                                                                |          | 440/80R28 (16.9R28)SB      |                                                                                                                         | 156A8/151D |
| 17     | 3002130010   | 8904365506349 |                                                                                                                                                                                                                                                                                                                |          | 480/65R28 SB               |                                                                                                                         | 154A8/149D |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                                                                                                                                                                                                                                          | Rim Dia. | Tire Size              | Pattern                                                                                                               | PR / LISI  |
|--------|------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------------------------|-----------------------------------------------------------------------------------------------------------------------|------------|
| 18     | 3002130011 | 8904365506363 | <b>Tractor<br/>Telehandler<br/>Backhoe<br/>loader</b><br><br><br> | 28       | 540/65R28 SB           | <br><b>MDR 1000</b><br>(TL)<br>IND | 160A8/155D |
| 19     | 3002130003 | 8904365506318 |                                                                                                                                                                                                                                                                                                                      | 30       | 440/80R30 (16.9R30) SB |                                                                                                                       | 157A8/153D |
| 20     | 3002130005 | 8904365506813 |                                                                                                                                                                                                                                                                                                                      |          | 480/80R30 (18.4R30) SB |                                                                                                                       | 162A8/157D |
| 21     | 3002130012 | 8904365506783 |                                                                                                                                                                                                                                                                                                                      |          | 540/65R30 SB           |                                                                                                                       | 161A8/156D |
| 22     | 3002130018 | 8904365506806 |                                                                                                                                                                                                                                                                                                                      |          | 600/70R30 SB           |                                                                                                                       | 171A8/166D |
| 23     | 3002130004 | 8904365506325 |                                                                                                                                                                                                                                                                                                                      | 34       | 440/80R34 (16.9R34) SB |                                                                                                                       | 159A8/155D |
| 24     | 3002130006 | 8904365506271 |                                                                                                                                                                                                                                                                                                                      |          | 480/80R34 (18.4R34) SB |                                                                                                                       | 164A8/159D |
| 25     | 3002130007 | 8904365506288 |                                                                                                                                                                                                                                                                                                                      | 38       | 480/80R38 (18.4R38) SB |                                                                                                                       | 166A8/161D |
| 26     | 3002130019 | 8904365507469 |                                                                                                                                                                                                                                                                                                                      |          | 540/80R38 (20.8R38) SB |                                                                                                                       | 172A8/167D |
| 27     | 3002130013 | 8904365506790 |                                                                                                                                                                                                                                                                                                                      |          | 600/65R38 SB           |                                                                                                                       | 170A8/166D |
| 28     | 3002130024 | 8904365506769 |                                                                                                                                                                                                                                                                                                                      |          | 650/65R38 SB           |                                                                                                                       | 175A8/170D |
| 29     | 3002130025 | 8904365506776 |                                                                                                                                                                                                                                                                                                                      |          | 650/65R38 SB SG        |                                                                                                                       | 175A8/170D |
| 30     | 3002130016 | 8904365507476 |                                                                                                                                                                                                                                                                                                                      |          | 650/85R38 SB           |                                                                                                                       | 183A8/178D |
| 31     | 3002130027 | 8904365509432 |                                                                                                                                                                                                                                                                                                                      | 42       | 620/80R42 SB           |                                                                                                                       | 181A8/177D |
| 32     | 3002130014 | 8904365506844 |                                                                                                                                                                                                                                                                                                                      |          | 650/65R42 SB           |                                                                                                                       | 176A8/171D |
| 33     | 3002130015 | 8904365506851 |                                                                                                                                                                                                                                                                                                                      |          | 710/70R42 SB           |                                                                                                                       | 185A8/180D |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                           | Rim Dia. | Tire Size | Pattern                                                                                                           | PR / LISI   |
|--------|------------|---------------|-------------------------------------------------------------------------------------------------------|----------|-----------|-------------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3001090002 | 8904365503409 | <b>Harvester</b><br> | 26       | 23.1-26   | <br><b>HRB 210</b><br>(TL) R-1 | 16 / 159 A6 |
| 2      | 3001090001 | 8904365503966 |                                                                                                       | 32       | 30.5L-32  |                                                                                                                   | 18 / 170 A8 |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                             | Rim Dia. | Tire Size          | Pattern                                                                                                                | PR / LISI             |
|--------|------------|---------------|---------------------------------------------------------------------------------------------------------|----------|--------------------|------------------------------------------------------------------------------------------------------------------------|-----------------------|
| 1      | 3001100008 | 8904365509845 | <b>Harvester</b><br> | 24       | 500/85R24 (IMP) SB | <br><b>HRR 200</b><br>(TL)<br>R-1 | 171 A8-FR / 158 A8-DW |
| 2      | 3001100001 | 8904365505588 |                                                                                                         | 26       | 620/75R26 SB       |                                                                                                                        | 167A8                 |
| 3      | 3001100009 | 8904365509852 |                                                                                                         | 30       | 500/85R30 (IMP) SB |                                                                                                                        | 176 A8-FR / 164 A8-DW |
| 4      | 3001100005 | 8904365509890 |                                                                                                         |          | 620/75R30 CHO SB   |                                                                                                                        | 169 A8                |
| 5      | 3001100002 | 8904365505595 |                                                                                                         | 32       | 650/75R32 SB       |                                                                                                                        | 172A8                 |
| 6      | 3001100006 | 8904365509876 |                                                                                                         |          | 680/85R32 SB       |                                                                                                                        | 179 A8                |
| 7      | 3001100003 | 8904365505601 |                                                                                                         |          | 800/65R32 SB       |                                                                                                                        | 181A8                 |
| 8      | 3001100007 | 8904365509883 |                                                                                                         |          | 800/70R32 SB       |                                                                                                                        | 175 A8                |
| 9      | 3001100004 | 8904365505618 |                                                                                                         |          | 900/60R32 SB       |                                                                                                                        | 191D                  |
| 10     | 3001100010 | 8904365509869 |                                                                                                         | 34       | 710/75R34 CHO SB   |                                                                                                                        | 184 A8                |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                                                                                                                                                                       | Rim Dia. | Tire Size                 | Pattern                                                                                                                       | PR / LISI      |
|--------|--------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------------|
| 1      | 3001100022DF | 8904365515327 | <b>Harvester,<br/>Floaters,<br/>Grain Carts<br/>&amp; Spreaders</b><br><br> | 26       | VF 1000/50R25 CFO (SB SG) | <br><b>VHR 3000</b><br>(TL)<br>R-1 / R-W | 184 D / 184 A8 |
| 2      | 3001100023DF | 8904365515334 |                                                                                                                                                                                                                                                   |          | VF 750/50R26 CFO (SB SG)  |                                                                                                                               | 169 D / 169 A8 |
| 3      | 3001100029DF | 8904365515365 |                                                                                                                                                                                                                                                   |          | VF 750/65R26 CFO (SB SG)  |                                                                                                                               | 180 A8         |
| 4      | 3001100015DF | 8904365515372 |                                                                                                                                                                                                                                                   |          | VF 800/65R32 CFO (SB SG)  |                                                                                                                               | 183 A8         |
| 5      | 3001100018DF | 8904365515396 |                                                                                                                                                                                                                                                   | 30       | VF 1050/50R32 CFO (SB SG) |                                                                                                                               | 198 D / 198 A8 |
| 6      | 3001100028DF | 8904365515402 |                                                                                                                                                                                                                                                   |          | VF 580/80R34 CFO (SB SG)  |                                                                                                                               | 178 A8         |
| 70     | 3001100020DF | 8904365515426 |                                                                                                                                                                                                                                                   |          | VF 800/55R46 CFO (SB SG)  |                                                                                                                               | 190 D / 190 A8 |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size                  | Pattern                                                                                                       | PR / LISI                  |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|----------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------|
| 1      | 3001050085 | 8904365506608 | Implement<br> | 10       | 7.50-10                    | <br>IMB 160<br>(TL)<br>I-1 | 12 / 111A8 FR / 99A8 DW    |
| 2      | 3001050102 | 8904365508480 |                                                                                                | 12       | 10.0/80-12                 |                                                                                                               | 8 / 116 A8 FR / 104 A8 DW  |
| 3      | 3001050062 | 8904365503188 |                                                                                                |          | 10.0/80-12                 |                                                                                                               | 10 / 121 A8 / 109 A8       |
| 4      | 3001050001 | 8904365501368 |                                                                                                |          | 10.0/75-15.3 (260/70-15.3) |                                                                                                               | 10 / 123 A8 / 111 A8       |
| 5      | 3001050103 | 8904365508497 |                                                                                                | 15.3     | 10.0/75-15.3               |                                                                                                               | 12 / 126 A8 FR / 114 A8 DW |
| 6      | 3001050002 | 8904365500552 |                                                                                                |          | 10.0/75-15.3 (260/70-15.3) |                                                                                                               | 14 / 130 A8 / 118 A8       |
| 7      | 3001050087 | 8904365505687 |                                                                                                |          | 10.0/75-15.3               |                                                                                                               | 18 / 135A8 FR 122A8 DW     |
| 8      | 3001050045 | 8904365502501 |                                                                                                |          | 11.5/80-15.3               |                                                                                                               | 10 / 131 A8 / 119 A8       |
| 9      | 3001050104 | 8904365508503 |                                                                                                |          | 11.5/80-15.3               |                                                                                                               | 12 / 135 A8 FR / 123 A8 DW |
| 10     | 3001050003 | 8904365500569 |                                                                                                |          | 11.5/80-15.3               |                                                                                                               | 14 / 139 A8 / 126 A8       |
| 11     | 3001050004 | 8904365501092 |                                                                                                |          | 11.5/80-15.3               |                                                                                                               | 16 / 142 A8 / 128 A8       |
| 12     | 3001050005 | 8904365501108 |                                                                                                |          | 11.5/80-15.3               |                                                                                                               | 18 / 144A8 FR / 132A8 DW   |
| 13     | 3001050006 | 8904365500576 |                                                                                                |          | 12.5/80-15.3 (300/80-15.3) |                                                                                                               | 14 / 142 A8 / 129 A8       |
| 14     | 3001050050 | 8904365502709 |                                                                                                |          | 12.5/80-15.3 (300/80-15.3) |                                                                                                               | 18 / 151 A8 / 139 A8       |
| 15     | 3001050082 | 8904365506639 |                                                                                                | 15.5     | 400/60-15.5                |                                                                                                               | 16 / 146A8 FR / 133 A8 DW  |
| 16     | 3001050079 | 8904365504307 |                                                                                                | 16       | 10.5/65-16                 |                                                                                                               | 14 / 130A8 FR / 118A8 DW   |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                     | Rim Dia. | Tire Size              | Pattern                                                                                                       | PR / LISI                     |
|--------|------------|---------------|-------------------------------------------------------------------------------------------------|----------|------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------|
| 1      | 3001050060 | 8904365503256 | Implement<br> | 16       | 13.0/75-16             | <br>IMB 160<br>(TL)<br>I-1 | 12 / 138 A8                   |
| 2      | 3001050093 | 8904365507384 |                                                                                                 |          | 14.0/65-16 (360/65-16) |                                                                                                               | 14 / 14PR/142 A8 FR/129 A8 DW |
| 3      | 3001050080 | 8904365506615 |                                                                                                 | 17       | 15.0/55-17             |                                                                                                               | 10 / 134A8 FR / 122A8 DW      |
| 4      | 3001050081 | 8904365506622 |                                                                                                 |          | 15.0/55-17             |                                                                                                               | 14 / 141A8 FR / 128A8 DW      |
| 5      | 3001050083 | 8904365506646 |                                                                                                 |          | 19.0/45-17             |                                                                                                               | 14 / 144A8 FR / 131A8 DW      |
| 6      | 3001050084 | 8904365506653 |                                                                                                 |          | 500/50-17              |                                                                                                               | 14 / 149A8 FR / 136A8 DW      |
| 7      | 3001050101 | 8904365508541 |                                                                                                 |          | 500/50-17              |                                                                                                               | 18 / 154 A8 FR / 142 A8 DW    |
| 8      | 3001050061 | 8904365503263 |                                                                                                 | 18       | 10.5/80-18             |                                                                                                               | 14 / 138 A8                   |
| 9      | 3001050032 | 8904365500996 |                                                                                                 |          | 12.5/80-18             |                                                                                                               | 16 / 148 A8 / 135 A8          |
| 10     | 3001050008 | 8904365500972 |                                                                                                 |          | 13.0/65-18             |                                                                                                               | 16 / 144 A8 / 131 A8          |
| 11     | 3001050009 | 8904365500989 |                                                                                                 |          | 15.0/70-18             |                                                                                                               | 16 / 151 A8 / 139 A8          |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                      | Rim Dia. | Tire Size              | Pattern                                                                                                         | PR / LISI          |
|--------|------------|---------------|--------------------------------------------------------------------------------------------------|----------|------------------------|-----------------------------------------------------------------------------------------------------------------|--------------------|
| 1      | 3001050011 | 8904365500897 | Implement<br> | 15.3     | 260/70-15.3            | <br>IMB 161<br>(TL)<br>I-2 | 10 / 122 A8 110 A8 |
| 2      | 3001050012 | 8904365502181 |                                                                                                  |          | 260/70-15.3            |                                                                                                                 | 14 / 131 A8 119 A8 |
| 3      | 3001050059 | 8904365503249 |                                                                                                  |          | 300/80-15.3            |                                                                                                                 | 14 / 139 A8        |
| 4      | 3001050046 | 8904365502518 |                                                                                                  | 15.5     | 400/60-15.5            |                                                                                                                 | 14 / 145 A8 132 A8 |
| 5      | 3001050014 | 8904365500927 |                                                                                                  |          | 400/60-15.5            |                                                                                                                 | 16 / 148 A8 135 A8 |
| 6      | 3001050047 | 8904365502525 |                                                                                                  |          | 400/60-15.5            |                                                                                                                 | 18 / 149 A8 136 A8 |
| 7      | 3001050015 | 8904365500934 |                                                                                                  | 16       | 340/55-16 (13.0/55-16) |                                                                                                                 | 12 / 133 A8 121 A8 |
| 8      | 3001050109 | 8904365509623 |                                                                                                  |          | 340/55-16 (13.0/55-16) |                                                                                                                 | 14 / 136 A8 124A8  |
| 9      | 3001050041 | 8904365501979 |                                                                                                  |          | 340/55-16 (13.0/55-16) |                                                                                                                 | 18 / 140 A8 128 A8 |
| 10     | 3001050044 | 8904365502143 |                                                                                                  | 17       | 380/55-17 (15.0/55-17) |                                                                                                                 | 10 / 134 A8 122 A8 |
| 11     | 3001050016 | 8904365500941 |                                                                                                  |          | 380/55-17 (15.0/55-17) |                                                                                                                 | 14 / 141 A8 128 A8 |
| 12     | 3001050042 | 8904365501986 |                                                                                                  |          | 380/55-17 (15.0/55-17) |                                                                                                                 | 18 / 146 A8 134 A8 |
| 13     | 3001050017 | 8904365500958 |                                                                                                  |          | 480/45-17 (19.0/45-17) |                                                                                                                 | 14 / 146 A8 134 A8 |
| 14     | 3001050043 | 8904365501993 |                                                                                                  |          | 480/45-17 (19.0/45-17) |                                                                                                                 | 18 / 149 A8 136 A8 |
| 15     | 3001050018 | 8904365501597 |                                                                                                  |          | 500/50-17              |                                                                                                                 | 10 / 143 A8 131 A8 |
| 16     | 3001050019 | 8904365500965 |                                                                                                  |          | 500/50-17              |                                                                                                                 | 14 / 149 A8 137 A8 |
| 17     | 3001050020 | 8904365502006 |                                                                                                  |          | 500/50-17              |                                                                                                                 | 18 / 154 A8 142 A8 |
| 18     | 3001050054 | 8904365502976 |                                                                                                  | 20       | 400/70-20 (16.0/70-20) |                                                                                                                 | 16 / 156 A8 144 A8 |
| 19     | 3001050021 | 8904365501580 |                                                                                                  |          | 500/55-20              |                                                                                                                 | 10 / 150 A8 138 A8 |
| 20     | 3001050022 | 8904365501009 |                                                                                                  |          | 500/55-20              |                                                                                                                 | 12 / 155 A8 143 A8 |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size        | Pattern                                                                                                       | PR / LISI              |
|--------|--------------|---------------|------------------------------------------------------------------------------------------------|----------|------------------|---------------------------------------------------------------------------------------------------------------|------------------------|
| 1      | 3001050066   | 8904365504093 | Implement<br> | 12       | 6.5/80-12        | <br>IMB 162<br>(TL)<br>I-3 | 6 / 93A8 FR 80A8 DW    |
| 2      | 3001050065   | 8904365504086 |                                                                                                |          | 7.00-12          |                                                                                                               | 6 / 95A8 FR 83A8 DW    |
| 3      | 3001050112DF | 8904365514870 |                                                                                                | 13       | 6.5/80-13        |                                                                                                               | 6 / 95/82 A8           |
| 4      | 3001050068   | 8904365504116 |                                                                                                | 15       | 5.00-15          |                                                                                                               | 6 / 88A8 FR 75A8 DW    |
| 5      | 3001050113   | 8904365514566 |                                                                                                |          | 6.5/80-15        |                                                                                                               | 6 / 98A8 FR 86A8 DW    |
| 6      | 3001050069   | 8904365504079 |                                                                                                |          | 7.5L-15          |                                                                                                               | 8 / 113A8 FR 100A8 DW  |
| 7      | 3001050023   | 8904365500903 |                                                                                                | 15.3     | 10.0/75-15.3     |                                                                                                               | 10 / 123 A8 111 A8     |
| 8      | 3001050107   | 8904365509111 |                                                                                                |          | 10.0/75-15.3 HLV |                                                                                                               | 10 HLV / 129 A8 123 A8 |
| 9      | 3001050051   | 8904365502716 |                                                                                                |          | 10.0/75-15.3     |                                                                                                               | 14 / 130 A8 118 A8     |
| 10     | 3001050052   | 8904365502723 |                                                                                                |          | 10.0/75-15.3     |                                                                                                               | 18 / 135 A8 123 A8     |
| 11     | 3001050024   | 8904365500910 |                                                                                                |          | 11.5/80-15.3     |                                                                                                               | 12 / 135 A8 123 A8     |
| 12     | 3001050053   | 8904365502730 |                                                                                                |          | 11.5/80-15.3     |                                                                                                               | 14 / 139 A8 126 A8     |
| 13     | 3001050108   | 8904365509128 |                                                                                                |          | 11.5/80-15.3 HLV |                                                                                                               | 14 HLV / 145 A8 139 A8 |
| 14     | 3001050067   | 8904365504109 |                                                                                                | 16       | 6.00-16          |                                                                                                               | 8 / 103 A8 91 A8       |
| 15     | 3001050089   | 8904365506660 |                                                                                                |          | 6.50-16          |                                                                                                               | 8 / 105A8 FR 93A8 DW   |
| 16     | 3001050070   | 8904365504161 |                                                                                                |          | 7.50-16          |                                                                                                               | 8 / 112A8 FR 99A8 DW   |
| 17     | 3001050048   | 8904365502556 |                                                                                                | 17       | 19.0/45-17       |                                                                                                               | 10 / 138 A8 125 A8     |
| 18     | 3001050088   | 8904365505731 |                                                                                                |          | 19.0/45-17       |                                                                                                               | 16 / 146A8 FR 133A8 DW |
| 19     | 3001050072   | 8904365504154 |                                                                                                | 18       | 7.50-18          |                                                                                                               | 8 / 114A8 FR 101A8 DW  |
| 20     | 3001050073   | 8904365504123 |                                                                                                |          | 10.5/80-18       |                                                                                                               | 10 / 131A8 FR 119A8 DW |
| 21     | 3001050074   | 8904365504130 |                                                                                                |          | 12.5/80-18       |                                                                                                               | 12 / 142A8 FR 129A8 DW |
| 22     | 3001050071   | 8904365504147 |                                                                                                | 20       | 7.50-20          |                                                                                                               | 8 / 116A8 FR 103A8 DW  |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                      | Rim Dia. | Tire Size     | Pattern                                                                                                         | PR / LISI  |
|--------|------------|---------------|--------------------------------------------------------------------------------------------------|----------|---------------|-----------------------------------------------------------------------------------------------------------------|------------|
| 1      | 3001050039 | 8904365501856 | Implement<br> | 14       | 9.5L-14 SL    | <br>IMB 163<br>(TL)<br>I-1 | 8 / 111 B  |
| 2      | 3001050115 | 8904365515129 |                                                                                                  |          | 11L-14 SL     |                                                                                                                 | 8 / 112 B  |
| 3      | 3001050090 | 8904365506677 |                                                                                                  | 15       | 6.70-15 SL    |                                                                                                                 | 6 / 97 B   |
| 4      | 3001050040 | 8904365501863 |                                                                                                  |          | 7.60-15 SL    |                                                                                                                 | 10 / 110 B |
| 5      | 3001050025 | 8904365501443 |                                                                                                  |          | 9.5L-15 SL    |                                                                                                                 | 8 / 112 B  |
| 6      | 3001050026 | 8904365501955 |                                                                                                  |          | 9.5L-15 SL    |                                                                                                                 | 12 / 121 B |
| 7      | 3001050116 | 8904365515136 |                                                                                                  |          | 10.00-15 SL   |                                                                                                                 | 8 / 121 B  |
| 8      | 3001050027 | 8904365501450 |                                                                                                  |          | 11L-15 SL     |                                                                                                                 | 8 / 113 B  |
| 9      | 3001050037 | 8904365501962 |                                                                                                  |          | 11L-15 SL     |                                                                                                                 | 12 / 121 B |
| 10     | 3001050173 | 8904365514986 |                                                                                                  |          | 11L-15 SL     |                                                                                                                 | 16 / 128 B |
| 11     | 3001050029 | 8904365501603 |                                                                                                  |          | 12.5L-15 SL   |                                                                                                                 | 12 / 127 B |
| 12     | 3001050117 | 8904365515143 |                                                                                                  |          | 31x13.5-15 SL |                                                                                                                 | 12 / 124 B |
| 13     | 3001050038 | 8904365501474 |                                                                                                  | 16       | 12.5L-16 SL   |                                                                                                                 | 14 / 130 B |
| 14     | 3001050100 | 8904365508985 |                                                                                                  | 16.1     | 14L-16.1SL    |                                                                                                                 | 14 / 138 B |
| 15     | 3001050063 | 8904365503485 |                                                                                                  |          | 16.5L-16.1 SL |                                                                                                                 | 12 / 141B  |
| 16     | 3001050064 | 8904365503492 |                                                                                                  |          | 21.5L-16.1 SL |                                                                                                                 | 14 / 152 B |
| 17     | 3001050118 | 8904365515150 |                                                                                                  | 20       | 7.50-20 SL    |                                                                                                                 | 6 / 106 B  |
| 18     | 3001050111 | 8904365509449 |                                                                                                  | 24       | 11.25-24 SL   |                                                                                                                 | 12 / 138 B |
| 19     | 3001050110 | 8904365509456 |                                                                                                  | 28       | 11.25-28 SL   |                                                                                                                 | 12 / 139 B |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                      | Rim Dia. | Tire Size   | Pattern                                                                                                      | PR / LISI   |
|--------|------------|---------------|--------------------------------------------------------------------------------------------------|----------|-------------|--------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3001050055 | 8904365503911 | Implement<br> | 14.5     | 200/60-14.5 | <br>IMB 164<br>(TL) IMP | 10 / 106 A8 |
| 2      | 3001050105 | 8904365508510 |                                                                                                  |          | 200/60-14.5 |                                                                                                              | 14 / 113 A8 |
| 3      | 3001050049 | 8904365503904 |                                                                                                  |          | 200/60-14.5 |                                                                                                              | 14 / 113 A8 |
| 4      | 3001050056 | 8904365503928 |                                                                                                  |          | 250/65-14.5 |                                                                                                              | 12 / 119 A8 |



| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size   | Pattern                                                                             | PR / LISI  |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|-------------|-------------------------------------------------------------------------------------|------------|
| 1      | 3001050078 | 8904365504239 | Implement<br> | 12       | 23×8.50-12  |  | 6 / 89 A6  |
| 2      | 3001050077 | 8904365504192 |                                                                                                |          | 26×12.00-12 |                                                                                     | 8 / 112 A6 |
| 3      | 3001050106 | 8904365508992 |                                                                                                |          | 26×12.00-12 |                                                                                     | 10 / 117A6 |
| 4      | 3001050076 | 8904365504178 |                                                                                                | 15       | 29×12.50-15 | IMB 165<br>(TL) IMP                                                                 | 6 / 98 B   |
| 5      | 3001050075 | 8904365504185 |                                                                                                |          | 31×15.50-15 |                                                                                     | 10 121 B   |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size   | Pattern                                                                             | LISI                   |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|-------------|-------------------------------------------------------------------------------------|------------------------|
| 1      | 3001050092 | 8904365507407 | Implement<br> | 12       | 320/60-12   |  | 132A8 FR<br>120 A8 DW  |
| 2      | 3001050094 | 8904365507391 |                                                                                                | 15.5     | 280/60-15.5 |                                                                                     | 128 A8 FR<br>116 A8 DW |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size   | Pattern                                                                             | PR / LISI  |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|-------------|-------------------------------------------------------------------------------------|------------|
| 1      | 3001050097 | 8904365508800 | Implement<br> | 15       | 9.5L-15 FI  |  | 12 / 123 J |
| 2      | 3001050098 | 8904365508817 |                                                                                                |          | 11L-15 FI   |                                                                                     | 12 / 128 J |
| 3      | 3001050099 | 8904365508824 |                                                                                                |          | 12.5L-15 FI | IMB 168<br>(TL) I-1                                                                 | 12 / 134 J |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                            | Rim Dia. | Tire Size | Pattern                                                                               | PR / LISI |
|--------|------------|---------------|--------------------------------------------------------------------------------------------------------|----------|-----------|---------------------------------------------------------------------------------------|-----------|
| 1      | 3001140001 | 8904365505038 | Tractor Trailer<br> | 16       | 9.00-16   |  | 16/137 A6 |
| 2      | 3001140002 | 8904365501870 |                                                                                                        |          | 9.00-16   |                                                                                       | 18/138 A6 |
| 3      | 3001140001 | 8904365505038 |                                                                                                        |          | 9.00-16   |                                                                                       | 16/137 A6 |
| 4      | 3001140002 | 8904365501870 |                                                                                                        |          | 9.00-16   |                                                                                       | 18/138 A6 |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                            | Rim Dia. | Tire Size | Pattern                                                                                                     | PR / LISI |
|--------|------------|---------------|--------------------------------------------------------------------------------------------------------|----------|-----------|-------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001180007 | 8904365508282 | Tractor Trailer<br> | 20       | 10.00-20  | <br>BOSS TR 21<br>(TT) | 18        |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                            | Rim Dia. | Tire Size | Pattern                                                                                                     | PR / LISI |
|--------|------------|---------------|--------------------------------------------------------------------------------------------------------|----------|-----------|-------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001140003 | 8904365514757 | Tractor Trailer<br> | 20       | 10.00-20  | <br>BOSS TR 22<br>(TT) | 18        |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size              | Pattern                                                                                                 | PR / LISI   |
|--------|------------|---------------|------------------------------------------------------------------------------------------------|----------|------------------------|---------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3001060014 | 8904365514634 | <br>Implement | 17       | 380/55R17 (15.0/55R17) | <br>IMR 140 (TL) IMP | 138A8/125A8 |
| 2      | 3001060005 | 8904365505472 |                                                                                                | 15       | 31X15.5R15             |                                                                                                         | 122B        |
| 3      | 3001060006 | 8904365505489 |                                                                                                |          | 33X15.5R15             |                                                                                                         | 126B        |
| 4      | 3001060003 | 8904365505496 |                                                                                                | 17       | 425/55R17              |                                                                                                         | 134D        |
| 5      | 3001060004 | 8904365505502 |                                                                                                |          | 500/50R17 SB           |                                                                                                         | 145D        |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                    | Rim Dia. | Tire Size            | Pattern                                                                                                  | LISI  |
|--------|--------------|---------------|------------------------------------------------------------------------------------------------|----------|----------------------|----------------------------------------------------------------------------------------------------------|-------|
| 1      | 3001060009DF | 8904365514856 | <br>Implement | 15       | VF 265/85R15 SB, SG  | <br>VIR 2500 (TL) IMP | 129 D |
| 2      | 3001060010DF | 8904365514863 |                                                                                                |          | VF 340/60R15 SB, SG  |                                                                                                          | 129 D |
| 3      | 3001080028   | 8904365507803 |                                                                                                |          | VF 280/70R15 SB SG   |                                                                                                          | 140 D |
| 4      | 3001060008   | 8904365509340 |                                                                                                |          | VF 380/70R15 SBSG    |                                                                                                          | 152D  |
| 5      | 3001080029   | 8904365507810 |                                                                                                |          | VF 320/70R15 SB SG   |                                                                                                          | 145 D |
| 6      | 3001080030   | 8904365507827 |                                                                                                | 16.5     | VF 380/55R16.5 SB SG |                                                                                                          | 148 D |
| 7      | 3001080031   | 8904365507834 |                                                                                                |          | VF 380/60R16.5 SB SG |                                                                                                          | 147 D |
| 8      | 3001060011DF | 8904365514832 |                                                                                                | 17       | VF 480/45R17 SB, SG  |                                                                                                          | 155 D |
| 9      | 3001060012DF | 8904365514849 |                                                                                                |          | VF 500/50R17 SB, SG  |                                                                                                          | 156 D |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                      | Rim Dia. | Tire Size      | Pattern                                                                                                   | LISI                   |
|--------|------------|---------------|--------------------------------------------------------------------------------------------------|----------|----------------|-----------------------------------------------------------------------------------------------------------|------------------------|
| 1      | 3001070025 | 8904365507414 | <br>Implement | 12       | 300/65-12      | <br>FTB 190 (TL) I-3 | 8 / 122A8 FR           |
| 2      | 3001070001 | 8904365501559 |                                                                                                  | 15.5     | 400/60-15.5    |                                                                                                           | 14 / 145 A8 / 141B FR  |
| 3      | 3001070007 | 8904365501016 |                                                                                                  |          | 400/60-15.5    |                                                                                                           | 16 / 148 A8 / 144B FR  |
| 4      | 3001070021 | 8904365505724 |                                                                                                  |          | 400/60-15.5    |                                                                                                           | 18 / 151A8 / 147B FR   |
| 5      | 3001070028 | 8904365507421 |                                                                                                  | 17       | 480/45-17      |                                                                                                           | 16 / 150A8 FR          |
| 6      | 3001070010 | 8904365502563 |                                                                                                  |          | 500/50-17      |                                                                                                           | 14 / 149 A8 145 B      |
| 7      | 3001070014 | 8904365502662 |                                                                                                  |          | 500/50-17      |                                                                                                           | 18 / 157 A8 154 B      |
| 8      | 3001070018 | 8904365503416 |                                                                                                  | 22.5     | 400/55-22.5    |                                                                                                           | 14 / 150 A8 146 B      |
| 9      | 3001070024 | 8904365504949 |                                                                                                  |          | 400/55-22.5    |                                                                                                           | 16 / 152 A8 / 149 B FR |
| 10     | 3001070002 | 8904365501023 |                                                                                                  |          | 500/45-22.5    |                                                                                                           | 16 / 154 A8 / 150 B    |
| 11     | 3001070022 | 8904365503201 |                                                                                                  |          | 500/50-22.5    |                                                                                                           | 20 / 163A8 FR 159B FR  |
| 12     | 3001070003 | 8904365501030 |                                                                                                  |          | 500/60-22.5    |                                                                                                           | 16 / 163 A8 159 B      |
| 13     | 3001070020 | 8904365505670 |                                                                                                  |          | 500/60-22.5    |                                                                                                           | 20 / 170 A8 167 B      |
| 14     | 3001070004 | 8904365501047 |                                                                                                  |          | 550/45-22.5    |                                                                                                           | 16 / 159 A8 156 B      |
| 15     | 3001070008 | 8904365502136 |                                                                                                  |          | 550/45-22.5    |                                                                                                           | 20 / 166 A8 162 B      |
| 16     | 3001070005 | 8904365501054 |                                                                                                  |          | 550/60-22.5    |                                                                                                           | 16 / 166 A8 162 B      |
| 17     | 3001070019 | 8904365503959 |                                                                                                  |          | 550/60-22.5 V  |                                                                                                           | 16 / 166 A8 162 B      |
| 18     | 3001070009 | 8904365502174 |                                                                                                  |          | 550/60-22.5    |                                                                                                           | 20 / 171 A8 167 B      |
| 19     | 3001070038 | 8904365514580 |                                                                                                  |          | 560/60-22.5 HD |                                                                                                           | 16 / 167 A8 163 B FR   |
| 20     | 3001070006 | 8904365501061 |                                                                                                  |          | 600/50-22.5    |                                                                                                           | 16 / 165 A8 161 B      |
| 21     | 3001070015 | 8904365502778 |                                                                                                  |          | 600/55-22.5    |                                                                                                           | 16 / 169 A8 166 B      |
| 22     | 3001070031 | 8904365514559 |                                                                                                  |          | 600/50-22.5 HD |                                                                                                           | 20 / 171 A8 168 B FR   |
| 23     | 3001070012 | 8904365502594 |                                                                                                  |          | 700/40-22.5    |                                                                                                           | 16 / 166 A8 162 B      |
| 24     | 3001070011 | 8904365502587 |                                                                                                  |          | 700/50-22.5    |                                                                                                           | 16 / 174 A8 170 B      |
| 25     | 3001070013 | 8904365502600 |                                                                                                  | 26.5     | 600/55-26.5    |                                                                                                           | 16 / 170 A8 167 B      |
| 26     | 3001070016 | 8904365502785 |                                                                                                  |          | 700/50-26.5    |                                                                                                           | 16 / 174 A8 170 B      |
| 27     | 3001070017 | 8904365502792 |                                                                                                  |          | 800/45-26.5    |                                                                                                           | 16 / 177 A8 173 B      |

| Sr. No | SKU Code   | EAN Number    | Application                                                                       | Rim Dia. | Tire Size         | Pattern                                                                                                           | PR / LISI |
|--------|------------|---------------|-----------------------------------------------------------------------------------|----------|-------------------|-------------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001080036 | 8904365509739 |  | 22.5     | 560/60R22.5 HD SB | <br><b>FCR 185</b><br>(TL) IMP | 169 D     |
| 2      | 3001080034 | 8904365509333 |                                                                                   | 26.5     | 600/55R26.5 HD SB |                                                                                                                   | 173D      |
| 3      | 3001080035 | 8904365509722 |                                                                                   |          | 650/55R26.5 HD SB |                                                                                                                   | 178 D     |
| 4      | 3001080049 | 8904365509609 |                                                                                   | 30.5     | 600/60R30.5 HD SB |                                                                                                                   | 178 D     |

| Sr. No | SKU Code     | EAN Number    | Application                                                                         | Rim Dia. | Tire Size         | Pattern                                                                                                             | PR / LISI |
|--------|--------------|---------------|-------------------------------------------------------------------------------------|----------|-------------------|---------------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001080051   | 8904365514627 |  | 17       | 480/45R17 SB      | <br><b>FTR 170</b><br>(TL) IMP | 140 D     |
| 2      | 3001080019   | 8904365503478 |                                                                                     |          | 500/50R17 SB      |                                                                                                                     | 149 D     |
| 3      | 3001080050   | 8904365514610 |                                                                                     |          | 520/50R17 SB      |                                                                                                                     | 151 D     |
| 4      | 3001080042   | 8904365509784 |                                                                                     | 17.5     | 400/45R17.5 SB    |                                                                                                                     | 139 D     |
| 5      | 3001080023   | 8904365506158 |                                                                                     | 22.5     | 500/60R22.5 SB    |                                                                                                                     | 155 D     |
| 6      | 3001080011   | 8904365503089 |                                                                                     |          | 560/45R22.5 SB    |                                                                                                                     | 152 D     |
| 7      | 3001080010   | 8904365503058 |                                                                                     |          | 560/60R22.5 SB    |                                                                                                                     | 165 D     |
| 8      | 3001080037   | 8904365509821 |                                                                                     |          | 580/65R22.5 SB    |                                                                                                                     | 166 D     |
| 9      | 3001080012   | 8904365503423 |                                                                                     |          | 600/50R22.5 SB    |                                                                                                                     | 159 D     |
| 10     | 3001080033   | 8904365509326 |                                                                                     |          | 600/50R22.5 SB    |                                                                                                                     | 167D      |
| 11     | 3001080052DF | 8904365514764 |                                                                                     |          | 600/55R22.5 (SB)  |                                                                                                                     | 162 D     |
| 12     | 3001080026   | 8904365506165 |                                                                                     |          | 620/40R22.5 SB    |                                                                                                                     | 154 D     |
| 13     | 3001080045   | 8904365509746 |                                                                                     |          | 650/50R22.5 SB    |                                                                                                                     | 163 D     |
| 14     | 3001080046   | 8904365509753 |                                                                                     |          | 710/40R22.5 SB    |                                                                                                                     | 165 D     |
| 15     | 3001080041   | 8904365509838 |                                                                                     |          | 710/45R22.5 SB    |                                                                                                                     | 165 D     |
| 16     | 3001080053DF | 8904365515242 |                                                                                     |          | 750/45R22.5 (SB)  |                                                                                                                     | 169 D     |
| 17     | 3001080069DF | 8904365515259 |                                                                                     |          | 750/45R22.5 SB    |                                                                                                                     | 176 D     |
| 18     | 3001080016   | 8904365503454 |                                                                                     | 26.5     | 750/45R26.5 SB    |                                                                                                                     | 170 D     |
| 19     | 3001080025   | 8904365506172 |                                                                                     |          | 650/60R26.5 SB    |                                                                                                                     | 180 D     |
| 20     | 3001080038   | 8904365509791 |                                                                                     |          | 650/65R26.5 SB    |                                                                                                                     | 174 D     |
| 21     | 3001080039   | 8904365509807 |                                                                                     |          | 650/65R26.5 SB    |                                                                                                                     | 181 D     |
| 22     | 3001080015   | 8904365503072 |                                                                                     |          | 710/50R26.5 SB    |                                                                                                                     | 170 D     |
| 23     | 3001080013   | 8904365503119 |                                                                                     |          | 600/55R26.5 SB    |                                                                                                                     | 165 D     |
| 24     | 3001080014   | 8904365503065 |                                                                                     |          | 650/55R26.5 SB    |                                                                                                                     | 170 D     |
| 25     | 3001080024   | 8904365505793 |                                                                                     |          | 650/55R26.5 SB    |                                                                                                                     | 178 D     |
| 26     | 3001080022   | 8904365505854 |                                                                                     |          | 800/45R26.5 SB    |                                                                                                                     | 174 D     |
| 27     | 3001080040   | 8904365509814 |                                                                                     | 30.5     | 600/60R30.5 SB    |                                                                                                                     | 173 D     |
| 28     | 3001080068DF | 8904365515266 |                                                                                     |          | 650/65R30.5 SB    |                                                                                                                     | 176 D     |
| 29     | 3001080017   | 8904365503461 |                                                                                     |          | 710/50R30.5 SB    |                                                                                                                     | 176 D     |
| 30     | 3001080020   | 8904365504314 |                                                                                     |          | 750/60R30.5 SB    |                                                                                                                     | 181 D     |
| 31     | 3001080032   | 8904365509500 |                                                                                     |          | 750/60R30.5 WS SB |                                                                                                                     | 181 D     |
| 32     | 3001080044   | 8904365509760 |                                                                                     |          | 800/45R30.5 SB    |                                                                                                                     | 176 D     |
| 33     | 3001080021   | 8904365505861 |                                                                                     |          | 850/50R30.5 SB    |                                                                                                                     | 182 D     |
| 34     | 3001080043   | 8904365509777 |                                                                                     | 32       | 800/60R32 SB      |                                                                                                                     | 185 D     |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                           | Rim Dia. | Tire Size      | Pattern                                                                                                           | PR / LISI |
|--------|--------------|---------------|-------------------------------------------------------------------------------------------------------|----------|----------------|-------------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001080065DF | 8904365514771 | <b>Flotation</b><br> | 22.5     | 560/45R22.5 SB | <br><b>FTR 176</b><br>(TL) IMP | 152 D     |
| 2      | 3001080070DF | 8904365515235 |                                                                                                       |          | 560/60R22.5 SB |                                                                                                                   | 165 D     |
| 3      | 3001080066DF | 8904365514788 |                                                                                                       |          | 560/60R22.5 SB |                                                                                                                   | 170 D     |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                            | Rim Dia. | Tire Size | Pattern                                                                                                           | PR / LISI  |
|--------|------------|---------------|--------------------------------------------------------------------------------------------------------|----------|-----------|-------------------------------------------------------------------------------------------------------------------|------------|
| 1      | 3001150001 | 8904365502327 | <b>Irrigation</b><br> | 24       | 11.2-24   | <br><b>IRB 260</b><br>(TL) R-1 | 6 / 110 A8 |
| 2      | 3001150002 | 8904365502334 |                                                                                                        |          | 14.9-24   |                                                                                                                   | 8 / 128 A8 |
| 3      | 3001150003 | 8904365502341 |                                                                                                        | 38       | 11.2-38   |                                                                                                                   | 6 / 114 A8 |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                               | Rim Dia. | Tire Size              | Pattern                                                                                                           | PR / LISI   |
|--------|------------|---------------|-----------------------------------------------------------------------------------------------------------|----------|------------------------|-------------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3001180003 | 8904365505748 | <b>Multi-Purpose</b><br> | 26       | 23.1-26 DB             | <br><b>SPB 260</b><br>(TL) R-3 | 18 / 170 A8 |
| 2      | 3001180001 | 8904365504468 |                                                                                                           | 30       | 620/75-30 (23.1-30) DB |                                                                                                                   | 16 / 161 A6 |
| 3      | 3001180004 | 8904365506189 |                                                                                                           |          | 620/75-30 (23.1-30) DB |                                                                                                                   | 18 / 164 A6 |
| 4      | 3001180002 | 8904365504727 |                                                                                                           | 32       | 650/75-32 (24.5-32) DB |                                                                                                                   | 16 / 164 A6 |
| 5      | 3001180005 | 8904365504901 |                                                                                                           |          | 650/75-32 (24.5-32) DB |                                                                                                                   | 18 / 167 A6 |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                                 | Rim Dia. | Tire Size    | Pattern                                                                                                             | PR / LISI |
|--------|------------|---------------|-------------------------------------------------------------------------------------------------------------|----------|--------------|---------------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001060007 | 8904365505571 | <b>Multi-Purpose</b><br> | 18       | 355/60R18 SB | <br><b>MPR 390</b><br>(TL) MPT | 16 / 142J |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                                   | Rim Dia. | Tire Size              | Pattern                                                                                                               | PR / LISI |
|--------|--------------|---------------|---------------------------------------------------------------------------------------------------------------|----------|------------------------|-----------------------------------------------------------------------------------------------------------------------|-----------|
| 1      | 3001200022   | 8904365514719 | <b>Lawn &amp; Garden</b><br> | 10       | 215/45R10 (18X8.50R10) | <br><b>UTR 240</b><br>(TL)<br>R-3+ | 80A8/B    |
| 2      | 3001200016   | 8904365507544 |                                                                                                               | 12       | 220/55R12              |                                                                                                                       | 82 A8/B   |
| 3      | 3001200001   | 8904365507612 |                                                                                                               |          | 240/60R12              |                                                                                                                       | 89 A8/B   |
| 4      | 3001200021   | 8904365509043 |                                                                                                               |          | 315/55R12(26X12.00R12) |                                                                                                                       | 85 A8/B   |
| 5      | 3001200023DF | 8904365514917 |                                                                                                               |          | 315/55R12(26X12.00R12) |                                                                                                                       | 102A8/B   |
| 6      | 3001200019   | 8904365508701 |                                                                                                               | 14       | 215/65R14(25X8.50R14)  |                                                                                                                       | 90 A8/B   |
| 7      | 3001200025   | 8904365511596 |                                                                                                               |          | 220/55R14              |                                                                                                                       | 105 A8/B  |
| 8      | 3001200024   | 8904365514726 |                                                                                                               | 15       | 215/70R15 (27X8.50R15) |                                                                                                                       | 90A8/B    |
| 9      | 3001200002   | 8904365507599 |                                                                                                               |          | 200/60R15              |                                                                                                                       | 83 A8/B   |
| 10     | 3001200003   | 8904365507575 |                                                                                                               | 16       | 200/65R16              |                                                                                                                       | 94 A8/B   |
| 11     | 3001200004   | 8904365507582 |                                                                                                               |          | 200/70R16              |                                                                                                                       | 94 A8/B   |
| 12     | 3001200005   | 8904365507605 |                                                                                                               |          | 240/70R16              |                                                                                                                       | 104 A8/B  |
| 13     | 3001200008   | 8904365507513 |                                                                                                               |          | 260/70R16              |                                                                                                                       | 109 A8/B  |
| 14     | 3001200015   | 8904365507506 |                                                                                                               |          | 280/70R16              |                                                                                                                       | 112 A8/B  |
| 15     | 3001200018   | 8904365508695 |                                                                                                               | 16.5     | 305/70R16.5(12R16.5)   |                                                                                                                       | 105 A8/B  |
| 16     | 3001200020   | 8904365509050 |                                                                                                               | 17.5     | 355/65R17.5(14R17.5)   |                                                                                                                       | 130 A8/B  |
| 17     | 3001200009   | 8904365507568 |                                                                                                               | 18       | 260/70R18              |                                                                                                                       | 114 A8/B  |
| 18     | 3001200014   | 8904365507490 |                                                                                                               |          | 280/70R18              |                                                                                                                       | 114 A8/B  |
| 19     | 3001200017   | 8904365508688 |                                                                                                               | 19.5     | 385/65R19.5            |                                                                                                                       | 130 A8/B  |
| 20     | 3001200006   | 8904365507629 |                                                                                                               | 20       | 300/70R20              |                                                                                                                       | 110 A8/B  |
| 21     | 3001200010   | 8904365507636 |                                                                                                               |          | 320/70R20              |                                                                                                                       | 113 A8/B  |
| 22     | 3001200012   | 8904365507520 |                                                                                                               |          | 380/70R20              |                                                                                                                       | 122 A8/B  |
| 23     | 3001200013   | 8904365507537 |                                                                                                               | 24       | 380/70R24              |                                                                                                                       | 125 A8/B  |
| 24     | 3001200011   | 8904365507643 |                                                                                                               |          | 420/70R24              |                                                                                                                       | 130 A8/B  |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                                 | Rim Dia. | Tire Size        | Pattern                                                                                                                | PR / LISI   |
|--------|------------|---------------|-------------------------------------------------------------------------------------------------------------|----------|------------------|------------------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3005040002 | 8904365504925 | <b>Agro Forestry</b><br> | 24       | 12.4-24 (SB, CR) | <br><b>AFB 821</b><br>(TL)<br>R-1 | 16 / 130 A8 |
| 2      | 3005040003 | 8904365504932 |                                                                                                             |          | 13.6-24 (SB, CR) |                                                                                                                        | 16 / 136 A8 |
| 3      | 3005040007 | 8904365504888 |                                                                                                             |          | 14.9-24 (SB, CR) |                                                                                                                        | 16 / 140 A8 |
| 4      | 3005040004 | 8904365504857 |                                                                                                             | 30       | 16.9-30 (SB, CR) |                                                                                                                        | 16 / 149 A8 |
| 5      | 3005040006 | 8904365504871 |                                                                                                             |          | 18.4-30 (SB, CR) |                                                                                                                        | 16 / 151 A8 |
| 6      | 3005040005 | 8904365504864 |                                                                                                             | 34       | 16.9-34 (SB, CR) |                                                                                                                        | 16 / 151 A8 |
| 7      | 3005040008 | 8904365504895 |                                                                                                             |          | 18.4-34 (SB, CR) |                                                                                                                        | 16 / 155 A8 |
| 8      | 3005040014 | 8904365514979 |                                                                                                             |          | 18.4-38 (SB, CR) |                                                                                                                        | 14 / 155 A8 |

| Sr. No | SKU Code   | EAN Number    | Application                                                                                               | Rim Dia. | Tire Size            | Pattern                                                                                                                 | PR / LISI          |
|--------|------------|---------------|-----------------------------------------------------------------------------------------------------------|----------|----------------------|-------------------------------------------------------------------------------------------------------------------------|--------------------|
| 1      | 3005010009 | 8904365507360 | <b>Log Skidder</b><br> | 26       | 18.4-26 Steel Belted | <br><b>LSB 780</b><br>(TL)<br>LS-2 | 16 / 152 A6        |
| 2      | 3005010001 | 8904365505663 |                                                                                                           |          | 23.1-26 Steel Belted |                                                                                                                         | 16 / 160 A6 172 A2 |
| 3      | 3005010002 | 8904365506400 |                                                                                                           |          | 28L-26 (SB, DB)      |                                                                                                                         | 20 / 165 A6        |
| 4      | 3005010010 | 8904365508657 |                                                                                                           |          | 28L-26 (SB, DB)      |                                                                                                                         | 26 / 173 A6        |
| 5      | 3005010008 | 8904365507377 |                                                                                                           | 32       | 24.5-32 (SB, DB)     |                                                                                                                         | 20 / 169 A6 181A2  |
| 6      | 3005010007 | 8904365506486 |                                                                                                           |          | 30.5L-32 (SB, DB)    |                                                                                                                         | 20 / 170 A6        |
| 7      | 3005010003 | 8904365506417 |                                                                                                           |          | 30.5L-32 (SB, DB)    |                                                                                                                         | 26 / 176 A6        |
| 8      | 3005010005 | 8904365506424 |                                                                                                           |          | 30.5L-32 (SB, DB)    |                                                                                                                         | 32 / 180 A6        |
| 9      | 3005010004 | 8904365507346 |                                                                                                           |          | 35.5L-32 (SB, DB)    |                                                                                                                         | 26 / 183 A6        |
| 10     | 3005010006 | 8904365507353 |                                                                                                           |          | 35.5L-32 (SB, DB)    |                                                                                                                         | 32 / 187 A6        |




| Sr. No | SKU Code   | EAN Number    | Application                                                                                             | Rim Dia. | Tire Size      | Pattern                                                                                                        | PR / LISI                             |
|--------|------------|---------------|---------------------------------------------------------------------------------------------------------|----------|----------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------|
| 1      | 3005060008 | 8904365508046 | Forestry Forwarder<br> | 22.5     | 710/40-22.5 SB | <br>FFB 840<br>(TL)<br>LS-2 | 20 / 161A8<br>HT -161A2 / LT -168A2   |
| 2      | 3005060005 | 8904365508077 |                                                                                                         | 26.5     | 600/55-26.5 SB |                                                                                                                | 20 / 165A8<br>HT -165A2 / LT -172A2   |
| 3      | 3005060006 | 8904365508053 |                                                                                                         |          | 710/45-26.5 SB |                                                                                                                | 20 / 168A8<br>HT -168A2 / LT -175A2   |
| 4      | 3005060011 | 8904365514443 |                                                                                                         |          | 710/55-26.5 SB |                                                                                                                | 24 / 179A8<br>HT- 179 A2 / LT- 186 A2 |
| 5      | 3005060007 | 8904365508060 |                                                                                                         |          | 800/40-26.5 SB |                                                                                                                | 20 / 170A8<br>HT -170A2 / LT -177A2   |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                             | Rim Dia. | Tire Size      | Pattern                                                                                                        | PR / LISI   |
|--------|--------------|---------------|---------------------------------------------------------------------------------------------------------|----------|----------------|----------------------------------------------------------------------------------------------------------------|-------------|
| 1      | 3005060013DF | 8904365515013 | Forestry Forwarder<br> | 22.5     | 710/40-22.5 SB | <br>FFB 841<br>(TL)<br>LS-2 | 24 / 167 A8 |
| 2      | 3005060018DF | 8904365515099 |                                                                                                         | 26.5     | 600/55-26.5 SB |                                                                                                                | 20 / 165A8  |
| 3      | 3005060027DF | 8904365515105 |                                                                                                         |          | 710/45-26.5 SB |                                                                                                                | 24 / 173 A8 |
| 4      | 3005060016DF | 8904365515112 |                                                                                                         |          | 750/55-26.5 SB |                                                                                                                | 26 / 185 A8 |

| Sr. No | SKU Code     | EAN Number    | Application                                                                                               | Rim Dia. | Tire Size      | Pattern                                                                                                         | PR / LISI                             |
|--------|--------------|---------------|-----------------------------------------------------------------------------------------------------------|----------|----------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------------|
| 1      | 3005060026DF | 8904365515006 | Forestry Forwarder<br> | 15.5     | 400/60-15.5 SB | <br>FFB 843<br>(TL)<br>I-3 | 20 / 152 A8 / 148 B<br>140 A8 / 135 B |

# **DRIVE ON** 7<sup>\*\*\*\*\*</sup> YEAR WARRANTY

*On Agriculture Radial Tires*

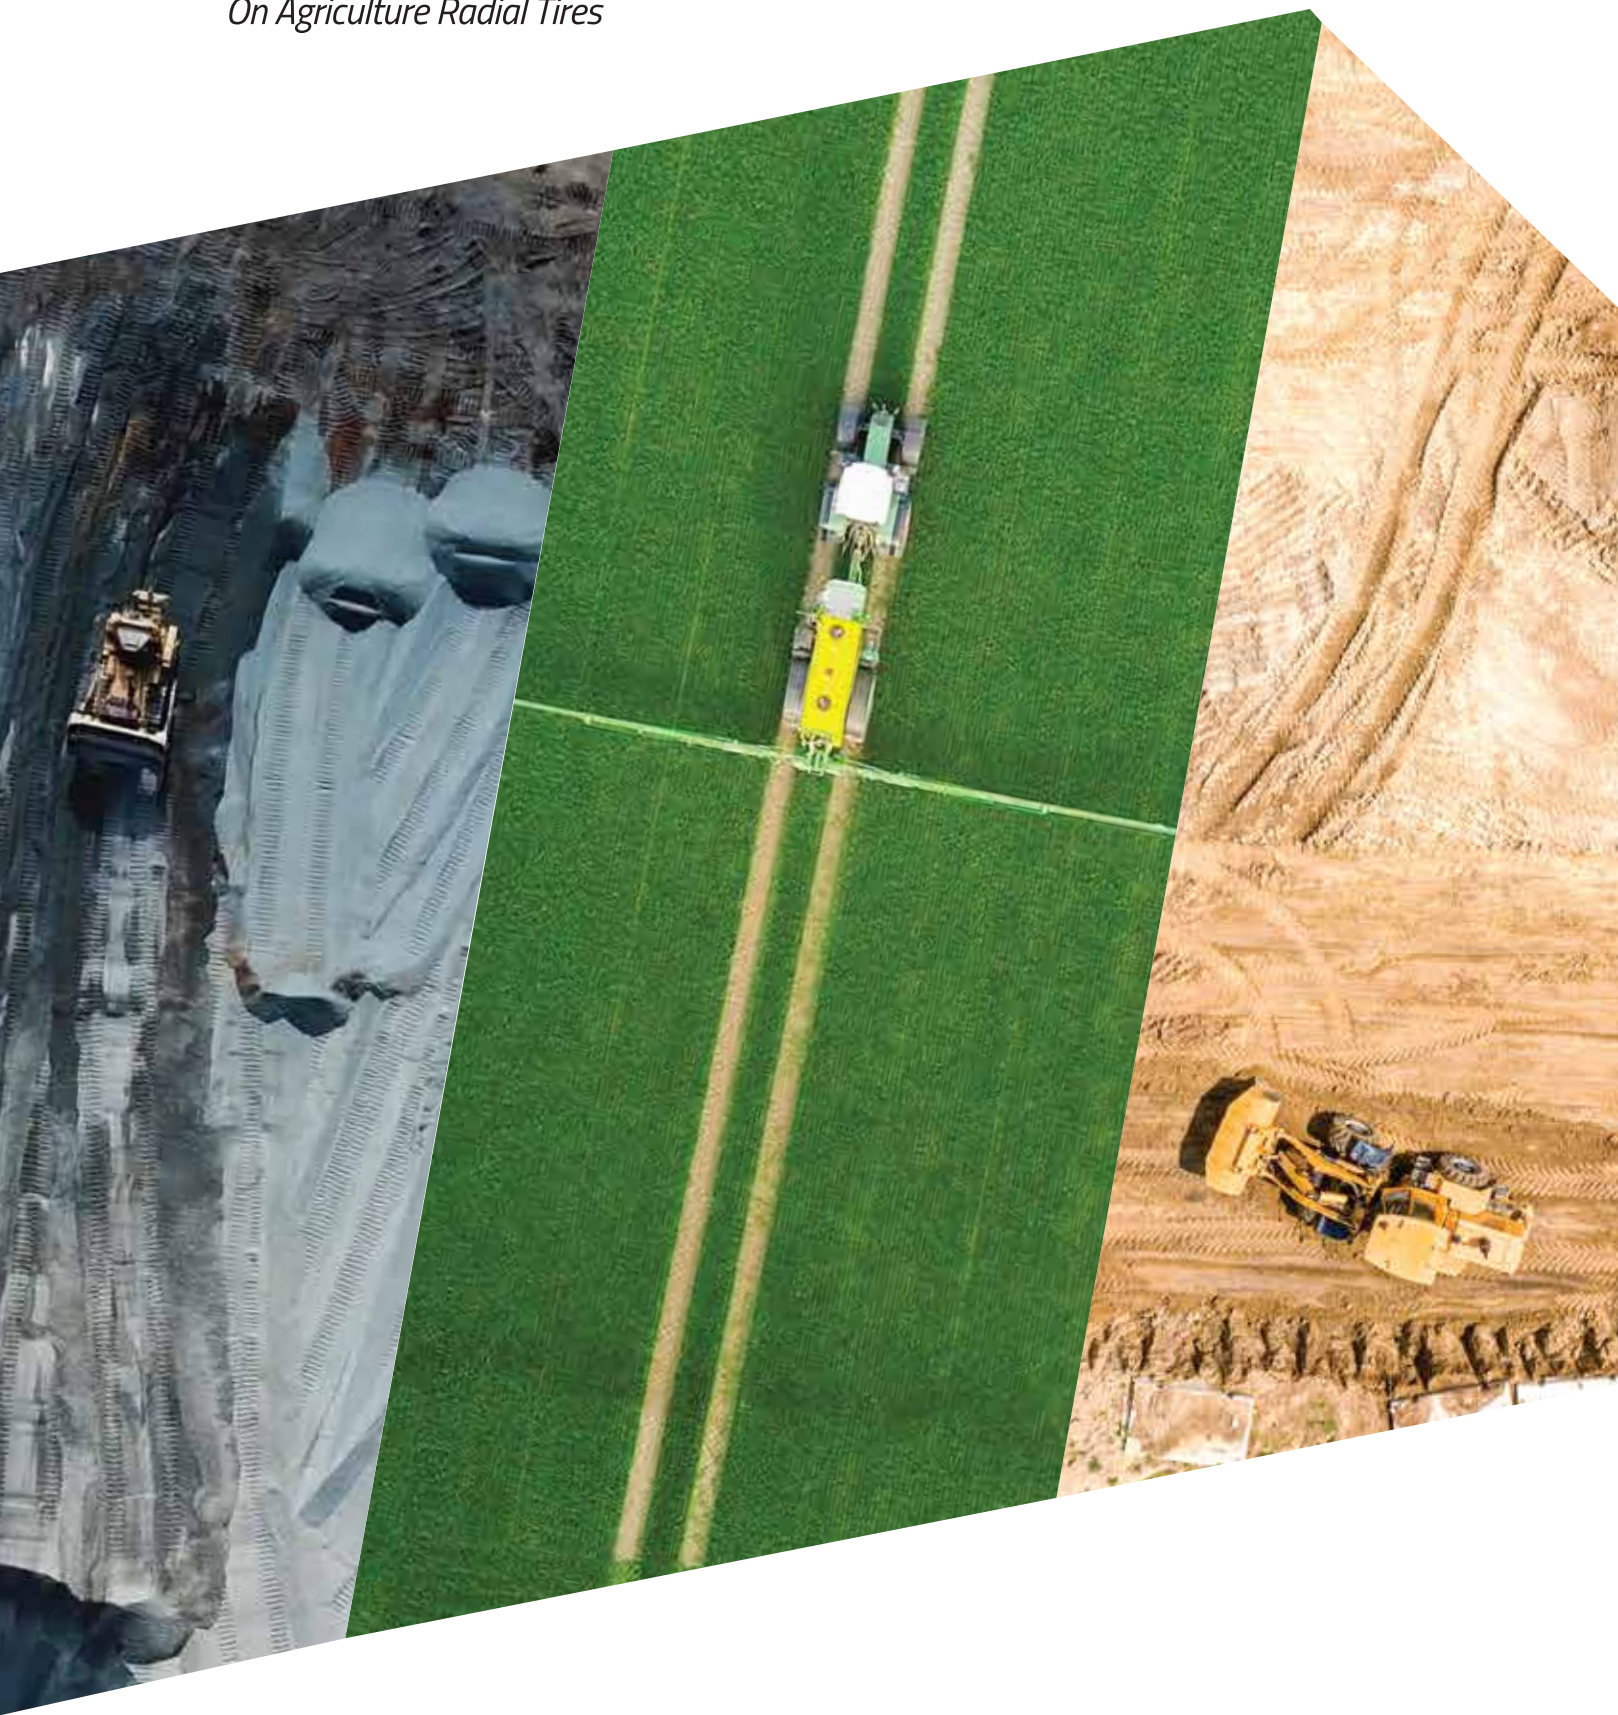

 **ASCENSO**  
never stop rising

# Ascenso International Warranty Policy for Agriculture Radial Tires


This limited warranty covers ASCENSO branded Agriculture Radial tires that are sold in the USA and Canada Markets, are manufactured on or after April 1, 2020 and meet the following criteria:

1. Tires that bear the name ASCENSO and the complete week codes, molded on the sidewall.
2. Products with at least 2 (32nds) of tread remaining.
3. The replacement percentage will be multiplied by the original purchase price of the tire (excluding any taxes or duties) to determine the amount of reimbursement to be applied. Such reimbursement must be applied towards the purchase price of the replacement tire in effect at the time of adjustment.
4. Tires that are not more than 7 years old. The years will be counted from the date of invoice (dealer's invoice to the end user) or from the month of production in case of non-availability of an invoice.
5. Tires that were used strictly in accordance with the recommendations of the applicable vehicle manufacturer and ASCENSO standard maintenance and safety recommendations, in normal agricultural service.
6. Defects established by ASCENSO personnel will only qualify for warranty and it will cease once the tires are repaired.
7. The customer will be responsible for all other charges including taxes, mounting, field service and other charges such as applicable freight.
8. The age of a tire will be determined by a sales invoice showing the date of purchase. If a proof of purchase is not available, the age of a tire will be determined from the date of manufacture, molded on the sidewall.
9. This warranty coverage is for tires used in normal applications and any use outside specifications automatically voids this warranty.
10. All adjusted tires will be disabled, and their week codes will be removed. The customer will be responsible for disposal of the adjusted tires.
11. If a tire in normal agricultural services becomes unserviceable within the time or tread-wear periods shown below, it will be replaced with a comparable new ASCENSO tire according annexure A mentioned below

## Scope Of Warranty

### Annexure-A

The limited warranty is available within certain age limits i.e. within certain number of month(s) from production or sale. Any adjustment will be based on the remaining tread depth or services life whichever is less, this warranty policy covers product described under the eligibility criteria.

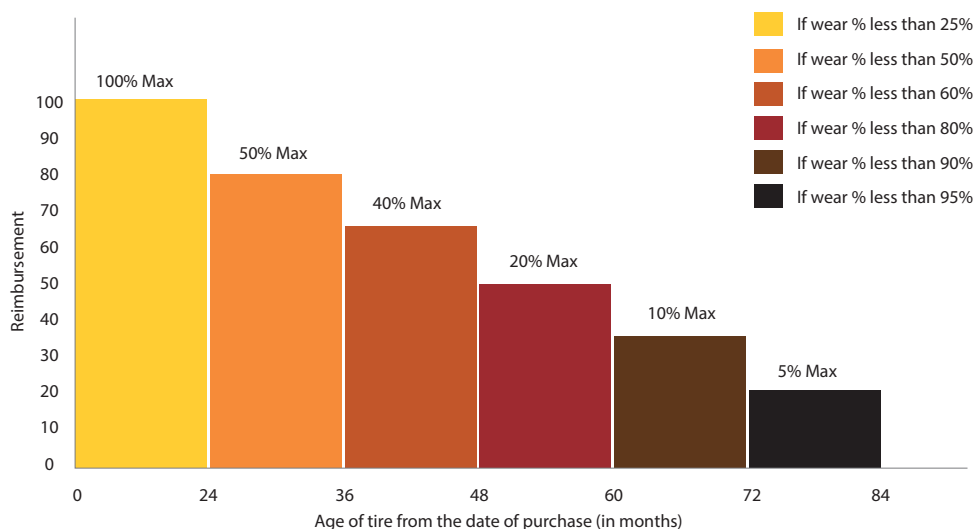

\* If a tire's purchase month or service cannot be accurately determined, then the date of manufacture will be considered for replacement.

\* Agriculture Tires include Tractor Radial, Flotation Radial and Agro Industrial Radials.

\* If the tire wear is more than above mentioned for each period, % credit will be calculated on pro-rata basis of the remaining tread depth.



# Field Hazard / Stubble Damage Policy

For stubble damage claims, the percentage of allowance will be based on the manufacture's evaluation of the fulfillment of the customer's obligations for stubble damage warranty as set out below. If a Tire running under normal agricultural service becomes completely unserviceable and non-repairable due to field hazard or stubble damage, the Customer will receive a replacement credit towards the purchase of a replacement tire equal to the % shown below:

| Period                                                                   | Tire Tread Depth Remaining | % Credit Allowance |
|--------------------------------------------------------------------------|----------------------------|--------------------|
| up to 12 months                                                          | 75 % or more               | Up to 75%          |
| up to 24 months                                                          | 50 % or more               | Up to 50%          |
| up to 36 months                                                          | 25% or more                | Up to 25%          |
| No credit allowed after 36 months or less than 25% tread depth remaining |                            |                    |

## Limitations

1. This limited warranty is applicable to the original purchaser and is not assignable to any subsequent owner.
2. Any tire, no matter how well manufactured, may fail in service or become unserviceable due to conditions beyond our control.
3. This limited warranty is under no circumstances a representation that a tire failure cannot occur.
4. No ASCENSO dealer, agent, or representative has the authority to make any representation, promise, or agreement which, in any way, varies, alters or enhances the terms of this warranty.
5. This warranty ceases once the tires are repaired.

## Failures Not Covered

### **This warranty does not cover:**

No credit allowed after 36 months or less than 25% tread depth remaining

1. Damage resulting from misuse, improper mounting, misapplication, use of non-approved rims, improper inflation, improper repair, overloading, running on a flat tire, misalignment or imbalance of wheels/rims, defective brakes or shock absorbers, abuse, wilful damage, oil, chemical reaction, fire or other externally-generated heat, use of studs, water or other materials trapped inside the tire.
2. Claims for irregular or rapid tread-wear
3. Full service rendered, repaired or retread tires
4. Any modifications to the tire (like added buttress shoulders, retreading, regrooving)

**Any material added to the tire (like tire fill, sealer, balancer) is not covered by this limited warranty and will not be compensated for under the provisions of this warranty.**




### **Disclaimer & right to change the policy**

When detailed information and/or decisions are required in order to implement/ interpret this policy, Ascenso can add and/or change such detailed information and/or decisions to this policy as "conditions" at any time. Ascenso reserves the right to change policy term and conditions from time to time at its sole direction.

# **DRIVE ON** **5<sup>★★★★★</sup> YEAR WARRANTY**

*On all BiasTires*

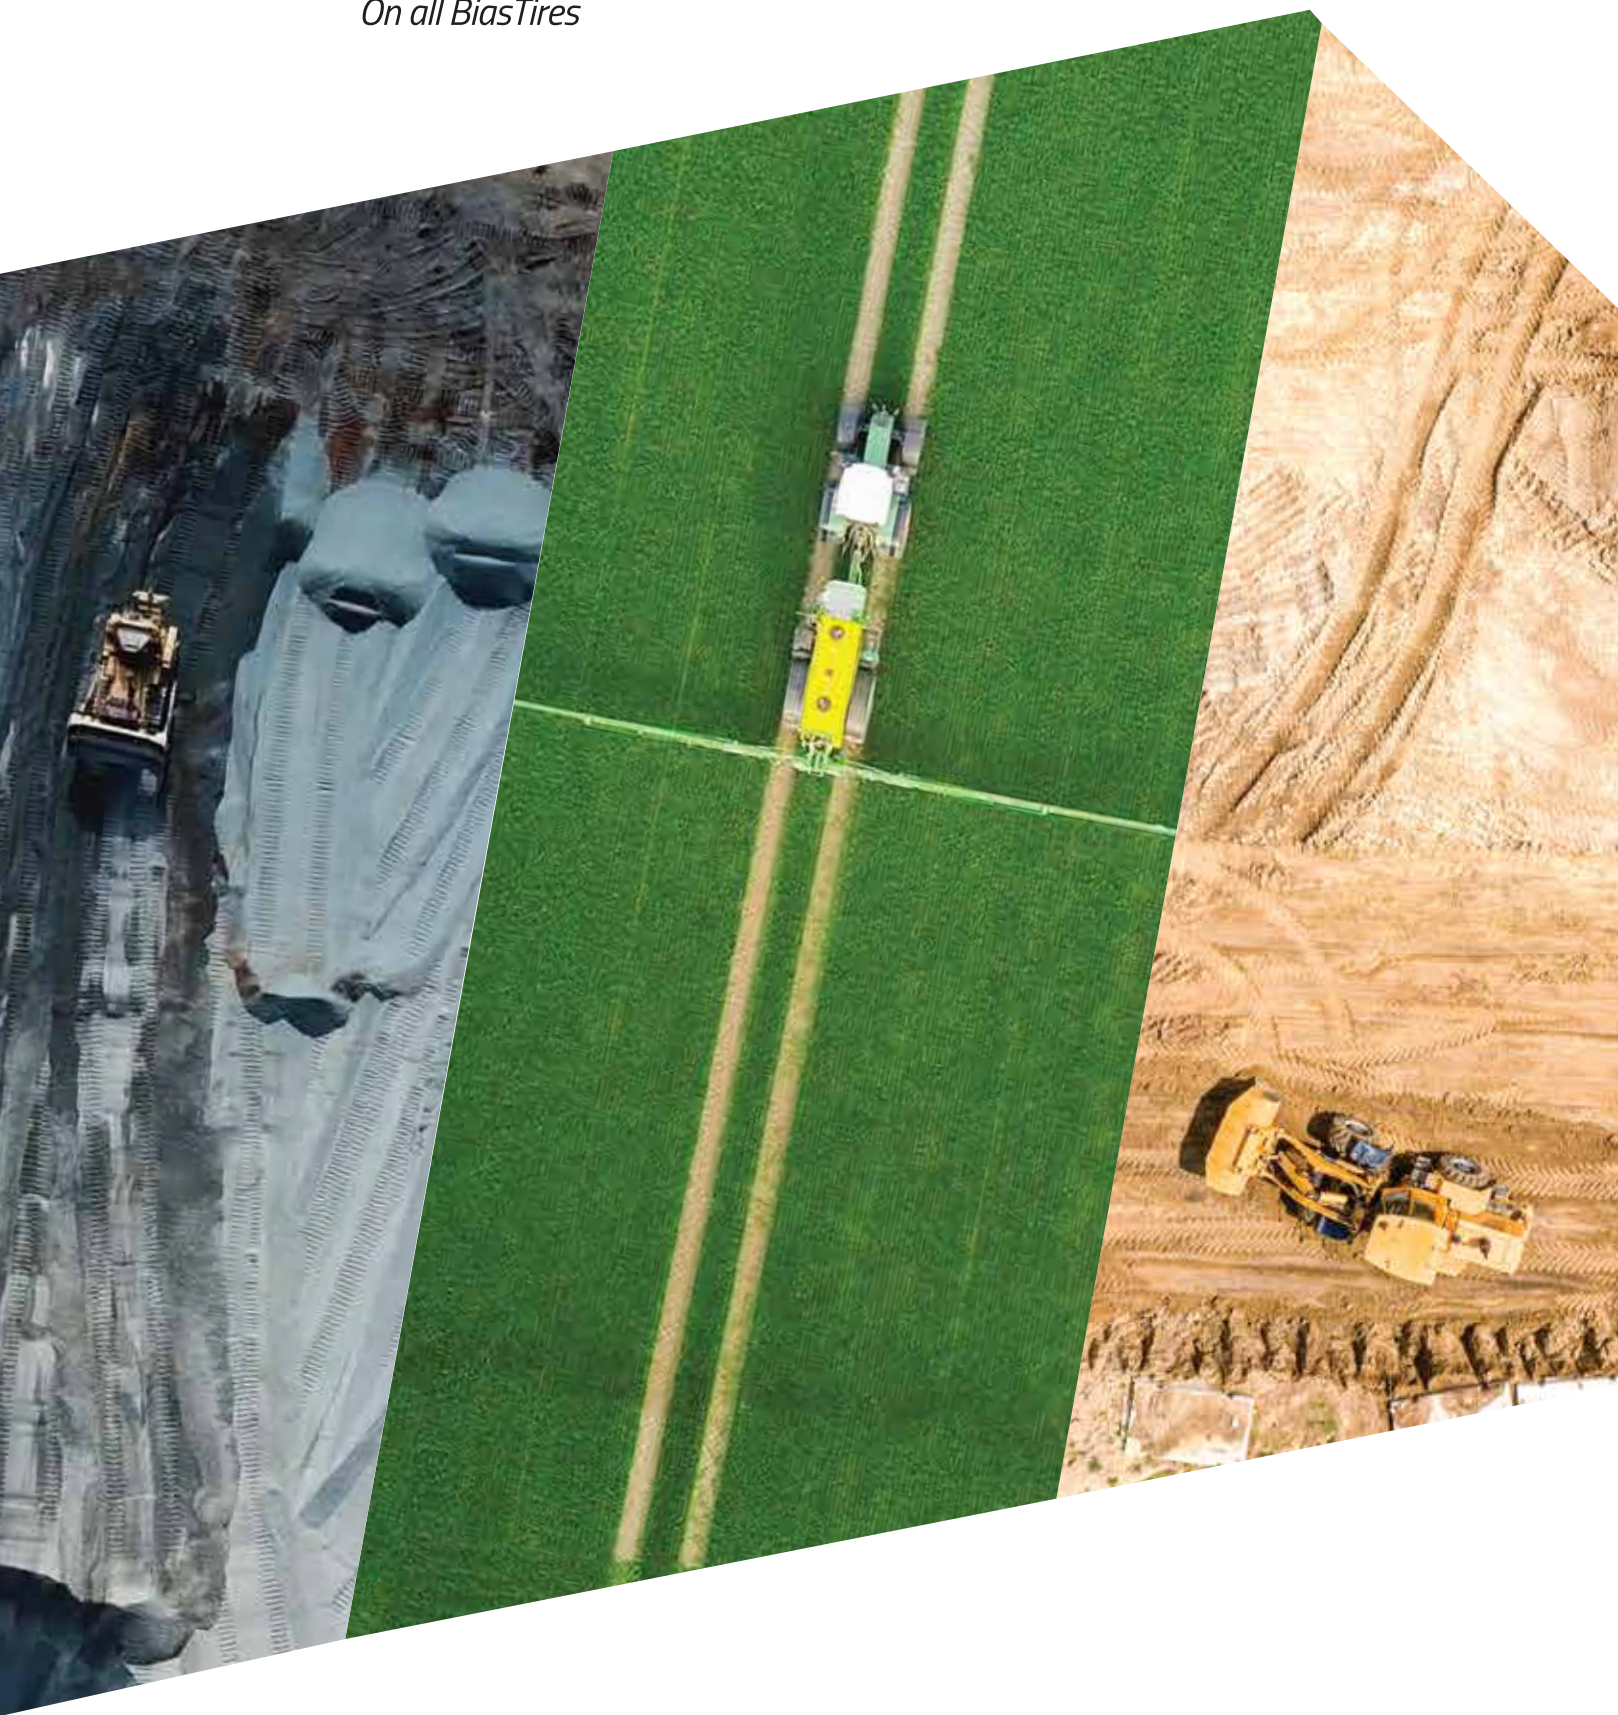

 **ASCENSO**  
*never stop rising*



# Ascenso International Warranty Policy for all Bias Tires

## Limited warranty


This limited warranty covers ASCENSO branded Bias tire that are sold in the USA and Canada Markets, are manufactured on or after April 1, 2020 and meet the following criteria:

## Eligibility

- Every tire bearing the name ASCENSO and with a complete week codes molded in the sidewall is warranted to be free from manufacturing defects within the manufacturer's control.
- Products with at least 2 ( 32nds ) of tread remaining.
- The replacement percentage will be multiplied by the original purchase price of the tire (excluding any taxes or duties) to determine the amount of reimbursement to be applied. Such reimbursement must be applied towards the purchase price of the replacement tire in effect at the time of adjustment.
- All adjusted tires will be disabled, and the week codes will be removed. The customer is responsible for the disposal of all adjusted tires.
- This warranty coverage is for tires used within published design specifications for ASCENSO tires. Any use outside such specifications automatically voids the warranty. Please consult ASCENSO data books or maintenance manuals for design specifications.
- This warranty does not apply to used or 'NA' (not adjustable) tires.
- If an examination by an authorized ASCENSO representative shows that any such tire failed as a result of manufacturing defects, either it will be, at the option of ASCENSO, repaired at no charge or a reimbursement will be issued towards the purchase price of a replacement tire being comparable with the ASCENSO product. This reimbursement will be determined by applying the lesser of the percentage of remaining tread depth (RTD%) and the maximum age-based reimbursement shown in the graph displayed below.

## Bias Agriculture, Industrial & Earthmover tires:

amount of credit to customer for manufacturing defects

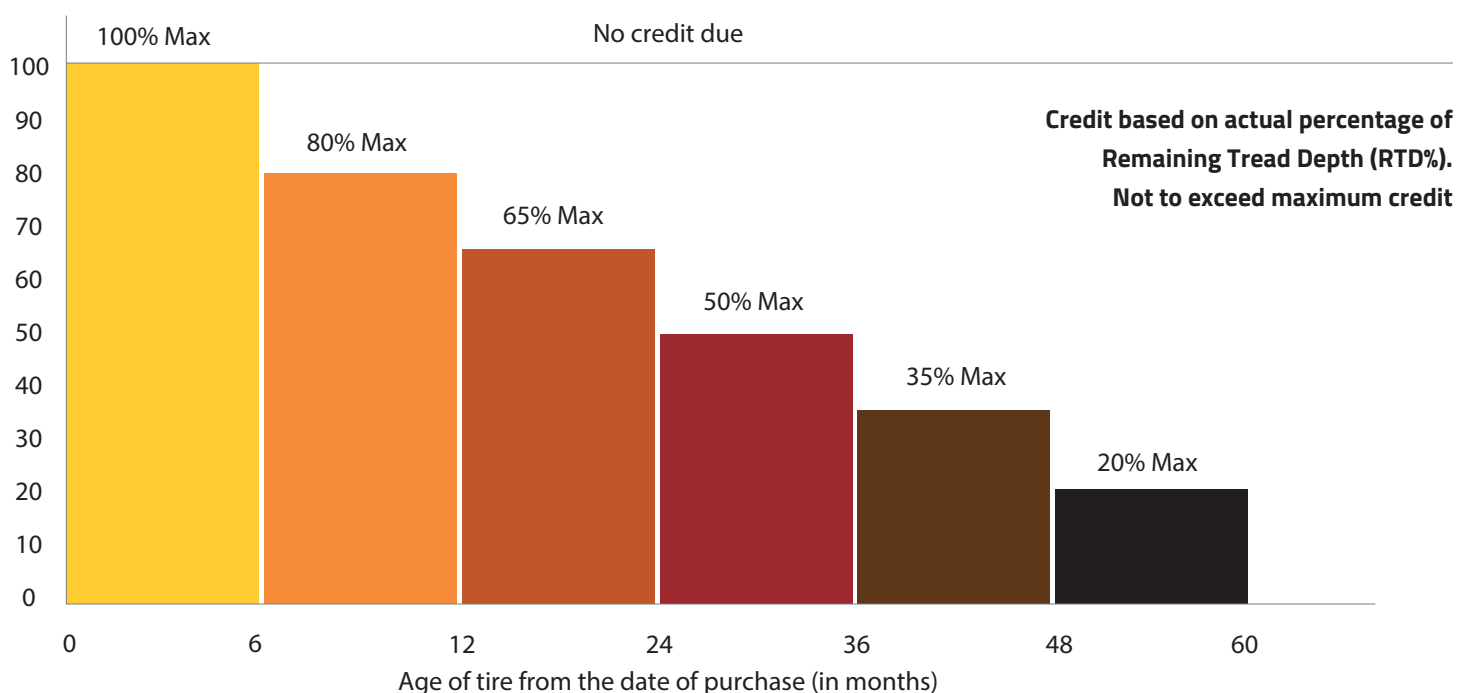

## Time period

This warranty applies to a maximum period of 5 years (60 months) from the date of purchase of a tire. If no invoice or documentation of the purchase can be provided, the date of manufacture will be used to determine the warranty.

## Limitations

- This limited warranty is applicable to the original purchaser and is not assignable to subsequent purchasers.
- No ASCENSO dealer, agent, or representative has the authority to make or imply any representation, promise or agreement which in any way varies or extends the terms of this warranty.
- Any tire, no matter how well manufactured, may fail in service or become unserviceable due to conditions beyond the control of the manufacturer.
- This limited warranty is under no circumstances a representation that a tire failure cannot occur.
- To the extent that the provisions of any applicable legislation expressly replace, eliminate, amend or prohibit any term or terms contained herein, such term or terms shall be accordingly replaced, eliminated, amended or extended, as the case may be, in accordance with such legislation.

## Limited warranty exclusions

**All tire warranties are subject to the following exclusions:**

1. Tires purchased after 60 months from the date of manufacture.
2. Tires for which alternative warranties or guarantees have been negotiated.
3. Tires used under chains. ASCENSO does recognize that in many applications tire chains provide enhanced tire protection and may extend the tire life. In these cases, ASCENSO may extend special negotiated warranties. Please consult your ASCENSO Off Road Tire Division representative for details.
4. Damage resulting from misuse, improper mounting, misapplication, use of non-approved rims, improper inflation, overloading, running on a flat tire, misalignment or imbalance of wheels/rims, defective brakes or shock absorbers, abuse, wilful damage, oil, chemical action, fire or other externally-generated heat, use of studs, water or other material trapped inside the tire, vehicle damage or road hazards (such as rock cuts, punctures, cut separations, impacts, flex breaks).
5. Claims for irregular wear or rapid tread wear.
6. Any tire which is operated above its ton-mile-per hour (TMPH) or ton-kilometre-per hour (TKPH) rating.
7. Tires mounted with non-approved tubes or O-rings.
8. Used, repaired or retread tires.
9. Any modifications to the tire (like added buttress shoulders, regrooving, relugging).
10. Any material added to the tire (like tire fill, sealer, balancer).
11. Use of a solid type fill (such as urethane).



### Disclaimer & right to change the policy

When detailed information and/or decisions are required in order to implement/ interpret this policy, Ascenso can add and/or change such detailed information and/or decisions to this policy as "conditions" at any time. Ascenso reserves the right to change policy term and conditions from time to time at its sole direction.

## Limited warranty exclusions

**12.** Any costs associated with the repair of tires (unless previously approved by ASCENSO).

**13.** Costs of mounting and balancing following pro-rated replacement or repair of tires or tubes, and applicable federal, state, provincial, and local taxes.

**14.** Cost of disposal of warranted tires. Disposal of tires is the sole responsibility of the customer.

**15.** All other warranties, including the implied warranties of merchantability and fitness for a particular purpose, are expressly disclaimed to the extent permitted by law.

**16.** All obligations or liabilities for indirect, incidental, punitive or consequential damage are hereby excluded to the extent permitted by law, including economic loss, loss of profit, loss of use of vehicle, loss of time, personal injury or death.

Some jurisdictions do not allow limitations in how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages; so the above limitations or exclusions may not apply to you.

## To obtain the warranty service:

**1.** Contact an authorized ASCENSO dealer or representative. Please be prepared to provide a proof of purchase of the product and a purchase date.

**2.** The authorized dealer or representative will contact ASCENSO to arrange the inspection of the tire in question and processing of your claim. The dealer has no authority or responsibility to make the determination as to eligibility for coverage under this warranty.



### Disclaimer & right to change the policy

When detailed information and/or decisions are required in order to implement/ interpret this policy, Ascenso can add and/or change such detailed information and/or decisions to this policy as "conditions" at any time. Ascenso reserves the right to change policy term and conditions from time to time at its sole direction.









Our philosophy to conserve and protect natural resources for future generations through environmental stewardship



**Ascenso Tires North America.**  
4637 Allen Road, Stow, OH 44224  
T: 800-321-0941  
E: sales@AscensoTiresNA.com  
W: www.AscensoTiresNA.com



**Mahansaria Tyres Pvt. Ltd.**  
3rd Floor, Peninsula Chambers, Ganpat Rao Kadam Marg,  
Lower Parel West, Mumbai 400013, India  
T: +91 22 4348 1600  
E: enquiry@ascensotyres.com  
W: www.ascensotyres.com



Please sign and stamp inside the box

Distributor/Dealer