




TCTR01

Regional & Mixed



Made in Indonesia

- Improved closed-shoulder design promotes even wear and long tread life
- Straight rib pattern ensures efficient water evacuation and consistent wear
- Delivers excellent wet traction and confident handling

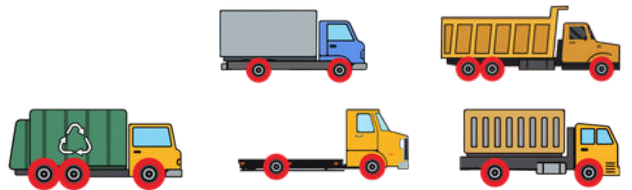

SKU Code	Size	Ply Rating	Service Index	Tread Depth (32nds)	Standard Rim	Overall Diameter	Section Width	Max Load Capacity at Cold Inflation Pressure			
								Single		Dual	
								(LBS)	(PSI)	(LBS)	(PSI)
1345968ISA	11R22.5	H/16	146/143L	20	8.25	41.5	11	6610	120	6005	120
1345967ISA	315/80R22.5	L/20	157/154K	20	9	42.4	12.3	9090	130	8270	130
1345779ISA	11R24.5	H/16	149/146L	20	8.25	43.5	11	7160	120	6610	120